
REVISION K

12/13/2023 ECN-472373

RECOMMENDED PASTE IN HOLE STENCIL FOR ESQT, SQT, SQW, TMM, TMMS, XTMM*

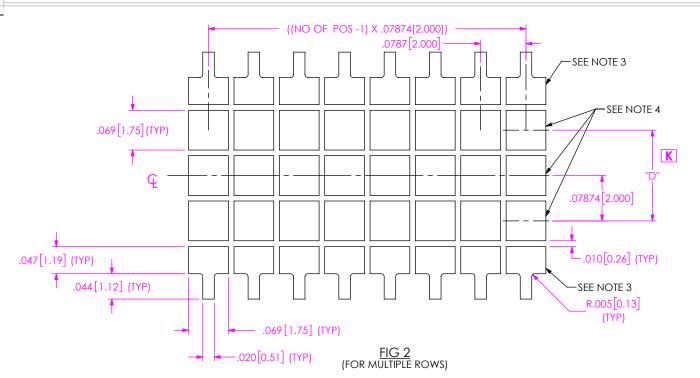

*	TABLE 1			
	XTMM			
	LTMM			
	MTMM			
	STMM			
	ZLTMM			
	ZSTMM			

K	TABLE 3				
	NO. OF ROWS	"D"			
	2	N/A			
	3	N/A			
	4	.07874 [2.000]			
	5	.15748 [4.000]			
	6	.23622 [6.000]			

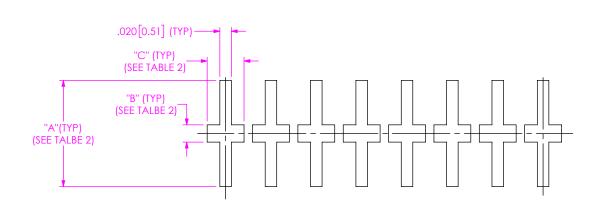


TABLE 2						
SERIES	"A"	"B"	"C"			
SQT	.220 [5.59]	.016 [0.41]	.050 [1.27]			
ESQT/TMM/MTMM	.184 [4.67]	.030 [0.76]	.064 [1.63]			

FOR SINGLE ROW ASSEMBLIES (SAME AS FIG 2, EXCEPT AS SHOWN)

NOTE:

- 1. ALL DIMENSIONS SYMMETRICAL ABOUT THE CENTERLINE.
- 2. STENCIL THICKNESS TO BE .006 [0.152].
- 3. THIS STENCIL GEOMETRY USED ON OUTER ROWS ONLY.
 4. THIS STENCIL GEOMETRY USED ON INNER ROWS ONLY (TRIPLE, OR GREATER, ROW COMPONENTS).

PROPRIETARY NOTE THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC INC. THIS DOCUMENT SHALL NOT BE DISCLOSED. IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

