REVISION BQ



HTSW-XXX-XX-XXX-X-XX-XX-XX TERMINAL SPACE SPEC TABLE 2 **OPTION 3** -1= .100 [2.54] (FILL EVERY POSITION) BODY SPECIFICATION *-MW: METAL WASHER -2= .200 [5.08] (FILL EVERY OTHER (STRAIGHT TAIL OPTION ONLY) POSITION STARTING WITH THE 1st ROW/OPTION USE BODY AVAILABLE ON 05, 06, 07, 08, 16, 17, 18 AND ENDING WITH THE LAST -S, -S-NA/-NE HTSW-50-S-LCP 22, 23,24, 25, 41 & 42 LEAD STYLES ONLY) POSITION IN BODY) (N/A WITH -LC OPTION. 20 POS MIN, 30 POS MAX. HTSW-50-SRA-LCP -S-RA/-S-RE SEE FIG 6, SHT 5) -D. -D-NA/NE HTSW-50-D-LCP NUMBER OF POSITIONS PER ROW -D-RA HTSW-50-DRA-LCP -1: -01 THRU -50 **OPTION 2** "A"= NUMBER OF POS x .100[2.54] -T, -T-NA/-NE HTSW-50-T-LCP -POLARIZING SPECIFICATION -2: -02 THRU -25 HTSW-50-TRA-LCP -T-RA, -Q-RA XXX INDICATES POS TO BE OMITTED "A"= (NUMBER OF POS x .200[5.08])-.100[2.54] HTSW-50-T-LCP LEAD STYLE SEE TABLE 1, SHT 6 <u>OPTION 1</u> -RAINEST STRAIGHT (SEE FIG 1, SHT 2) -RAINEST STRAIGHT ANGLE (SEE TABLE 3 & 4, FIG 5, SHT 4) (-RA OPTION WITH -LL OPTION EQUALS TO -LA OPTION) PLATING SPECIFICATIONS -G: 10µ" GOLD IN CONTACT AREA, 3µ" GOLD ON TAIL -RE: EXTENDED RIGHT ANGLE (SEE TABLE 3 & 4, FIG 5, SHT 4) -T: MATTE TIN CONTACT AND TAIL (SINGLE ROW ONLY) -S: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL -NA: RA OPTION WITH STRAIGHT OPTION BODY (SEE TABLE 3 & 4, FIG 5, SHT 4) -H: 30µ" HEAVY GOLD IN CONTACT AREA, 3µ" GOLD ON TAIL (-NA OPTION WITH -LL OPTION IS VALID) -NE: RE OPTION WITH STRAIGHT OPTION BODY (SEE TABLE 3 & 4, FIG 5, SHT 4) -LC: LOCKING CLIP (4 POS MINIMUM; ONLY AVAILABLE ON: -L: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL -F: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL LEAD STYLES -08 THRU -13 & -22, WITH ROW OPTIONS -S & -D; N/A WITH -MW, -RA OR -RE OPTIONS; SEE FIG 2, SHT 2) -Ε: 50μ" EXTRA HEAVY GOLD IN CONTACT AREA, 3μ" GOLD ON TAIL (AVAILABLE ON LEAD STYLES -07, -08, -09 STRAIGHT AND -08-D-RA) -TL: TIN/LEAD (90/10 ±5%) CONTACT AND TAIL, -LA: -RA OPTION WITH -LL OPTION (SEE SHT 3) -LL: LOCKING LEAD (SEE FIG 4, SHT 3) (AVAILABLE ONLY ON LEAD STYLES -07, -08 & -09) (N/A WITH -RE OR -NE OPTIONS) -TM: MATTE TIN CONTACT AND TAIL (N/A IN SINGLE ROW, 1 OR 2 POSITIONS) -SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL -LM: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL -FM: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL ROW SPECIFICATION (SEE TABLE 2) -STL: 30µ" SELECTIVE GOLD IN CONTACT AREA, TIN/LEAD (90/10 ±5%) TAIL -S: SINGLE -D: DOUBLE -LTL: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA, TIN/LEAD (90/10 +/-5%) TAIL, -T: TRIPLE (AVAILABLE ONLY ON LEAD STYLE -15) -Q: TRIPLE ROW, FILL OUTER ROWS ONLY -SS: 30µ" STRIPE SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ONTAIL, (SEE NOTE 9)

* - MW OPTION, DO NOT DESIGN IN. SAMTEC WILL ONLY SUPPORT EXISTING BUSINESS 2/12/02.

CRITICAL DIMENSION INSPECTION INSTRUCTION TABLE						
ASSEMBLY OPERATION	IN-PROCESS INSPECTION					
FILL	C1					
MULTI-CUT	C2					
RIGHT ANGLE	C4					
RIGHT ANGLE	C5					
RIGHT ANGLE	C6					
CRIMP	C7					
CPCs INTENTIONALLY DELETED:	C3					


NOTES:


- 1. © REPRESENTS CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL.
- 2. MINIMUM TERMINAL PUSHOUT FORCE: 3 LBS.
- 3. MAXIMUM HEIGHT VARIATION: .005[.127] (N/A ON -RA TAIL).

-Q


- 4. ASSEMBLE GOLD PLATE END AS SHOWN IN FIG 1.
- 5. STYLE -26: ROUND END OF PIN TO APPEAR ON BOTTOM (SEE FIG 7, SHT 6).
- 6. MINIMUM GOLD PLATED CONTACT AREA: .165[4.19] REF; PINS -18, -21 & -25: .050[1.27] REF. 7. CRIMP TWO PINS CLOSEST TO CENTER OF THE PART IF THERE IS A POLARIZED POSITION
- IN THE MIDDLE/CENTER.
- 8. MAXIMUM CUT FLASH: 010 [.25]. 9. -SS PLATING OPTION ONLY AVAILABLE ON -07, -08, -09 STRAIGHT AND -08 -RA LEAD STYLES. MATES WITH SSQ, SSW, SSM, BCS, ESQ & ESW.
- 10. MEASURE FROM THE BEND RADIUS OF THE TERMINALS.
- 11. ORIENTATE PINS TO PREVENT BANDOLIER MARKS FROM SHOWING IN THE POST AREA. (SEE TABLE 6, SHT 7).

		1			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.	* PROPRIETARY NOTE *				
TOLERANCES ARE:	PROPRIETARY INFORMATION AND ALL DESIGN,				
DECIMALS ANGLES	MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC.	5			
.XX: ±.01 [.25] 2°	INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE				
.XXX: ±.005 [.13] .XXXX: ±.0020 [.051]	OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY	520 PARK EAST BLVD, NEW ALBANY, IN 47150			
	OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.	PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322			
			00/11/120:00/11/ 0		
MATERIAL: DO NOT SCALE	DRAWING SHEET SCALE: 3.5:1	DESCRIPTION:			
INSULATOR: LCP, UL-94-V-0	.025 SQ POST HI-TEMP TERMINAL STRIP ASSEMBLY				
COLOR: NATURAL		DWG. NO.			
	HTSW-XXX-XX-XXX-X-XX-XX-XX				
F:\DWG\MISC\MKTG\HTSW-XXX-XX-XXX		BY: PURVIS	02/17/87	Sheet 1 of 7	

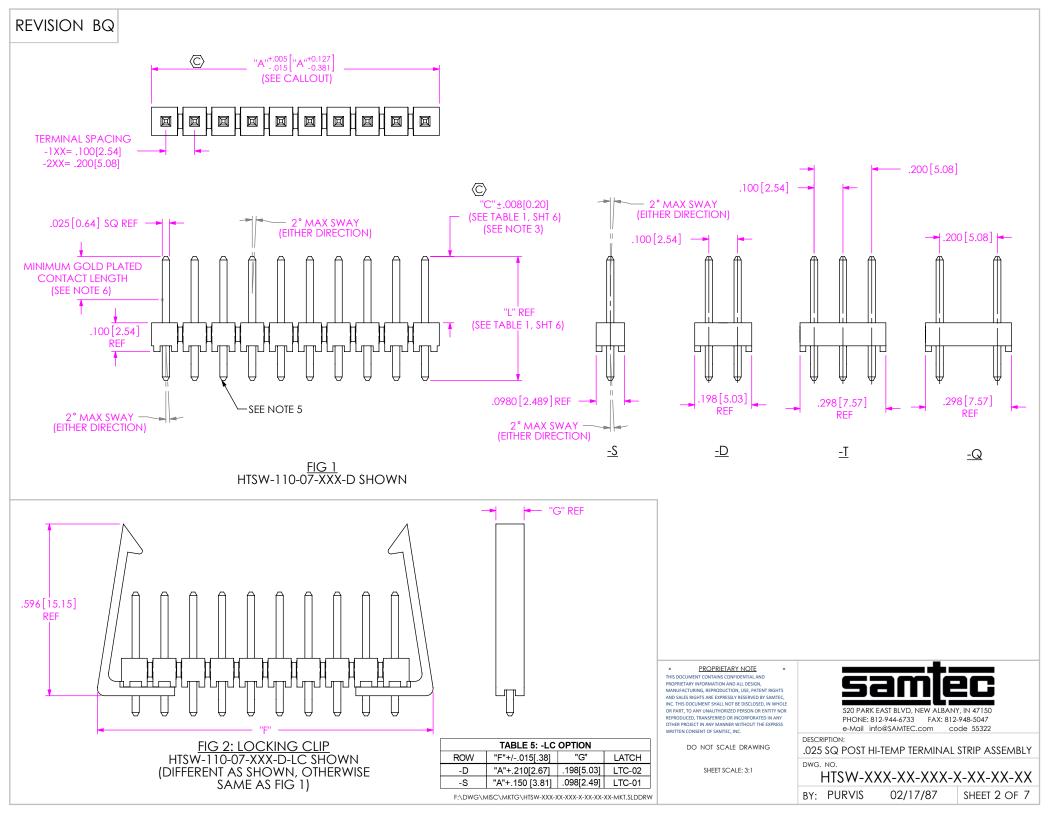

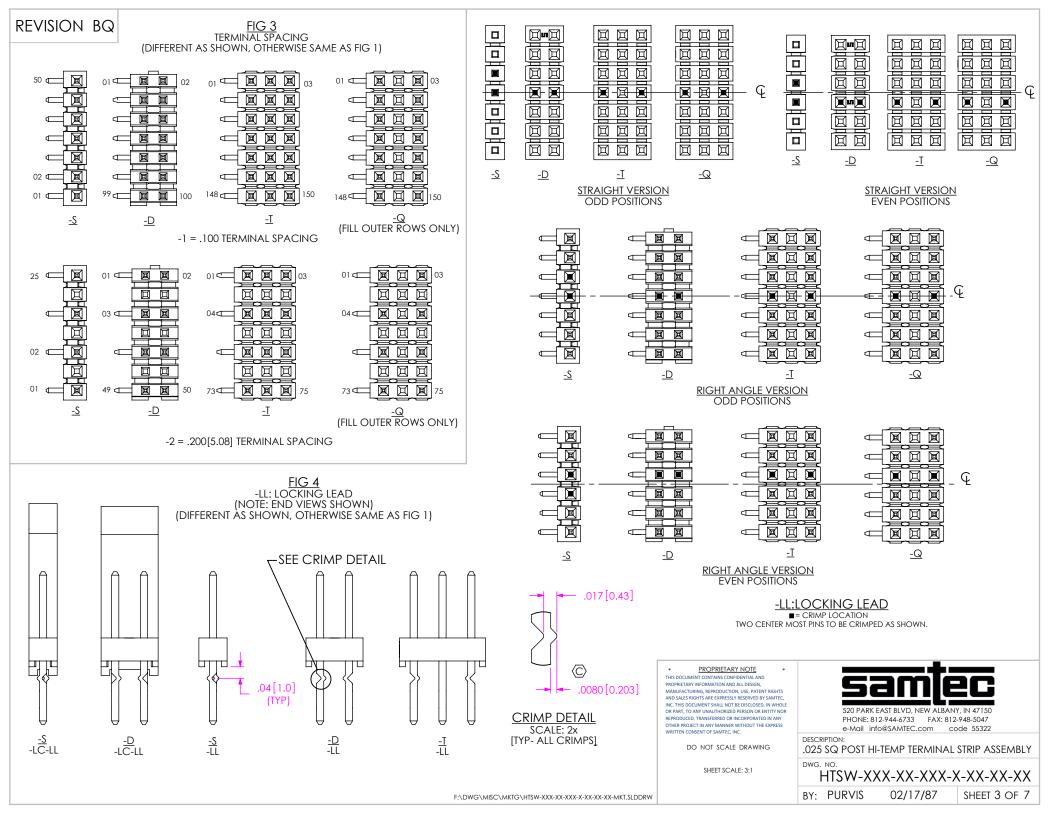

REVISION BQ

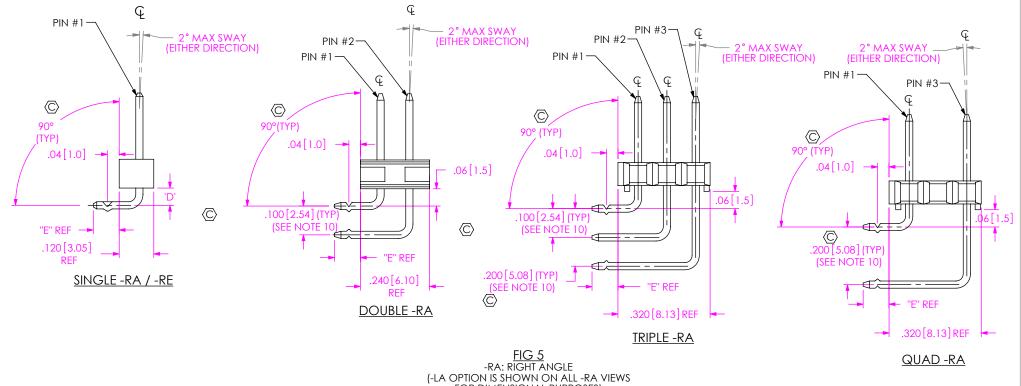


(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

TABLE 3				
-XX	"D"			
-RA / -NA	.06 [1.5]			
-RE / -NE	.16 [4.1]			



	TABLE 4 - "E"								
LEAD STYLE	RA SINGLE	RE SINGLE	RA DOUBLE	RA TRIPLE	NA SINGLE	NE SINGLE	NA DOUBLE	NA TRIPLE	
08	.090 [2.29]	N / A	.090 [2.29]	.090 [2.29]	.109 [2.77]	N / A	.109 [2.77]	.109 [2.77]	
09	.290 [7.37]	.190 [4.83]	.290 [7.37]	.290 [7.37]	.309 [7.85]	.209 [5.31]	.309 [7.85]	.309 [7.85]	
10	.390 [9.91]	.290 [7.37]	.390 [9.91]	.390 [9.91]	.409 [10.39]	.309 [7.85]	.409 [10.39]	.409 [10.39]	
11	.490 [12.45]	.390 [9.91]	.490 [12.45]	.490 [12.45]	.509 [12.93]	.409 [10.39]	.509 [12.93]	.509 [12.93]	
12	.590 [14.99]	.490 [12.45]	.590 [14.99]	.590 [14.99]	.609 [15.47]	.509 [12.93]	.609 [15.47]	.609 [15.47]	
13	.790 [20.07]	.690 [17.53]	.790 [20.07]	N / A	.809 [20.55]	.709 [18.01]	.809 [20.55]	N / A	
16	.200 [5.08]	.100 [2.54]	.200 [5.08]	.200 [5.08]	.219 [5.56]	.119 [3.02]	.219 [5.56]	.219 [5.56]	
21	.990 [25.15]	.890 [22.61]	N/A	N / A	1.009 [25.63]	.909 [23.09]	N / A	N / A	
22	.190 [4.83]	.090 [2.29]	.190 [4.83]	.190 [4.83]	.209 [5.31]	.109 [2.77]	.209 [5.31]	.209 [5.31]	
25	.100 [2.54]	N / A	.100 [2.54]	.100 [2.54]	.119 [3.02]	N / A	.119 [3.02]	.119 [3.02]	
27	.890 [22.61]	.790 [20.07]	N/A	N / A	.909 [23.09]	.809 [20.55]	N/A	N / A	
28	.690 [17.53]	.590 [14.99]	.690 [17.53]	N / A	.709 [18.01]	.609 [15.47]	.709 [18.01]	N / A	
29	.800 [20.32]	N / A	N/A	N / A	.819 [20.80]	N / A	N/A	N / A	
30	.600 [15.24]	N / A	.600 [15.24]	N / A	.619 [15.72]	N / A	.619 [15.72]	N / A	

F:\DWG\MISC\MKTG\HTSW-XXX-XX-XXX-XX-XX-XX-XX-MKT.SLDDRW

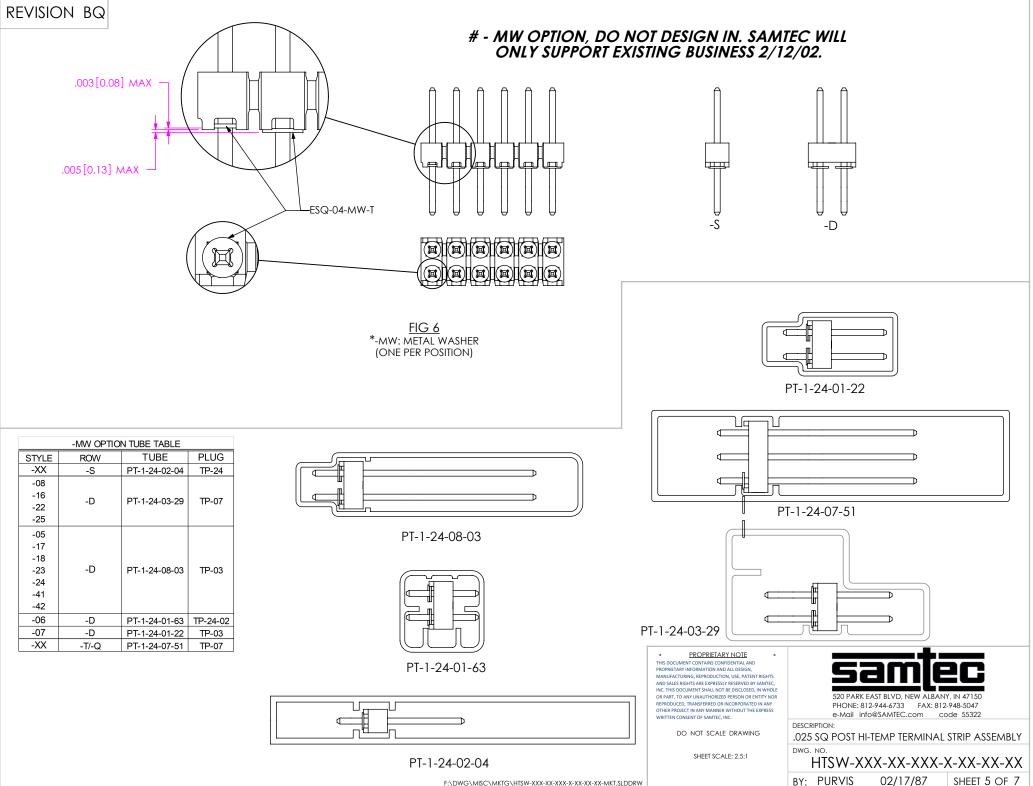

F:\DWG\MISC\MKTG\HTSW-XXX-XX-XX-XX-XX-XX-MKT.SLDDRW

REVISION BQ

			TABLE 1				
TERMINAL SPECIFICATIONS							
TERMINAL SPEC	PIN #1	"L"	PIN #2 (2)	PIN #3	"C"		
-05 (3)	T-1S6-21-XXX-2	.335 [8.51]	N/A	N/A	.105 [2.67]	(5)	
-06 (3)	T-1S6-18-XXX-2	.300 [7.62]	N/A	N/A	.105 [2.67]	(5)	
-07 (3)	T-1S6-07-XXX-2	.430 [10.92]	N/A	N/A	.230 [5.84]	(5)	
-08 (4)	T-1S6-08-XXX-2	.530 [13.46]	T-1S6-09-XXX-2	T-1S6-11-XXX-2	.230 [5.84]	(5) (6) (7)	
-09	T-1S6-09-XXX-2	.730 [18.54]	T-1S6-11-XXX-2	T-1S6-20-XXX-2	.230 [5.84]	(6)	
-10	T-1S6-10-XXX-2	.830 [21.08]	T-1S6-12-XXX-2	T-1S6-13-XXX-2	.230 [5.84]		
-11	T-1S6-11-XXX-2	.930 [23.62]	T-1S6-20-XXX-2	T-1S6-19-XXX-2	.230 [5.84]		
-12	T-1S6-12-XXX-2	1.030 [26.16]	T-1S6-13-XXX-2	T-1S6-14-XXX-2	.230 [5.84]		
-13	T-1S6-13-XXX-2	1.230 [31.24]	T-1S6-14-XXX-2	N/A	.230 [5.84]		
-14 (3)	T-1S6-08-XXX-2	.530 [13.46]	N/A	N/A	.320 [8.13]	(5)	
-15 (3)	T-1S6-09-XXX-2	.730 [18.54]	N/A	N/A	.520 [13.21]	(5)	
-16	T-1S6-09-XXX-2	.730 [18.54]	T-1S6-11-XXX-2	T-1S6-20-XXX-2	.320 [8.13]	(5) (6)	
-17 (3)	T-1S6-10-XXX-2	.830 [21.08]	N/A	N/A	.620 [15.75]	(5)	
-18 (3)	T-1S6-11-XXX-2	.930 [23.62]	N/A	N/A	.720 [18.29]	(5)	
-19 (3)	T-1S6-12-XXX-2	1.030 [26.16]	N/A	N/A	.820 [20.83]	(5)	
-20 (3)	T-1S6-13-XXX-2	1.230 [31.24]	N/A	N/A	1.020 [25.91]	(5)	
-21	T-1S6-14-XXX-2	1.430 [36.32]	N/A	N/A	1.220 [30.99]	(5)	
-21 (1)	T-1S6-14-XXX-2	1.430 [36.32]	N/A	N/A	.230 [5.84]		
-22	T-1S6-15-XXX-2	.630 [16.00]	T-1S6-10-XXX-2	T-1S6-12-XXX-2	.230 [5.84]	(5) (6)	
-23 (3)	T-1S6-16-XXX-2	.445 [11.30]	N/A	N/A	.230 [5.84]	(5)	
-24 (3)	T-1S6-17-XXX-2	.480 [12.19]	N/A	N/A	.265 [6.73]	(5)	
-25 (4)	T-1S6-15-XXX-2	.630 [16.00]	T-1S6-10-XXX-2	T-1S6-12-XXX-2	.320 [8.13]	(5) (6)	
*-26 (3)	T-1RS7-01-XXX-2	.456 [11.58]	N/A	N/A	.230 [5.84]		
-27	T-1S6-19-XXX-2	1.330 [33.78]	N/A	N/A	.230 [5.84]		
-28	T-1S6-20-XXX-2	1.130 [28.70]	T-1S6-19-XXX-2	N/A	.230 [5.84]		
-29 (4)	T-1S6-19-XXX-2	1.330 [33.78]	N/A	N/A	.320 [8.13]		
-30 (4)	T-1S6-20-XXX-2	1.130 [28.70]	T-1S6-19-XXX-2	N/A	.320 [8.13]		
-41	T-1S6-25-XXX-2	.365 [9.27]	N/A	N/A	.230 [5.84]		
-42	T-1S6-26-XXX-2	.470 [11.94]	N/A	N/A	.320 [8.13]		

.025[0.64] REF(TYP) Ø.018[0.46] REF(TYP)

<u>FIG 7</u> -26 LEAD STYLE (SAME AS FIG 1, DIFFERENT AS SHOWN)

(1) WITH -RA or -RE OPTION(5) AVAILABLE IN -LL OPTION.(2) OMIT WITH -Q ROW SPECIFICATION(6) AVAILABLE IN -LA OPTION.(3) NOT AVAILABLE IN -RA OR -RE OPTION.(7) ON STYLE -08 -RA & -LA(4) NOT AVAILABLE IN -RE OPTION.(7) ON STYLE -08 -RA & -LA(4) NOT AVAILABLE IN -RE OPTION.(7) ON SONLY; 'C' = .230+.005/-.008 [5.84+.13/-.20]*SQUARE END OF PIN(T-1RS7-01-XXX-2)SHOULD BE LOCATED AT "C" DIMENSION DURING FILL PROCESS.


(SEE FIG 7)



F:\DWG\MISC\MKTG\HTSW-XXX-XX-XX-XX-XX-XX-MKT.SLDDRW

		TAE	BLE 6 (-T P	LATING ONLY)			
	NUMBER OF BAND MARKS ALLOWED IN POST AREA				NUMBER OF BAND MARKS ALLOWED IN POST AREA		
LEAD STYLE	PIN #1	PIN #2	PIN #3	LEAD STYLE	PIN #1	PIN #2	PIN #3
*-05	*0	N/A	N/A	*-17	2	N/A	N/A
-06	1	N/A	N/A	*-18	2	N/A	N/A
-07	1	N/A	N/A	*-19	2	N/A	N/A
-08	0	0	0	*-20	2	N/A	N/A
-08 RA	0	0	0	*-21	2	N/A	N/A
-09	0	0	0	-21-RA	0	N/A	N/A
-09 RA	0	0	0	-21-RE	0	N/A	N/A
-09-RE	0	0	0	-22	0	0	0
-10	0	0	0	-22-RA	0	0	0
-10-RA	0	0	0	-22-RE	0	0	0
-10-RE	0	0	0	-23	1	N/A	N/A
-11	0	0	0	-24	1	N/A	N/A
-11-RA	0	0	0	-25	1	1	1
-11-RE	0	0	0	*-25-RA	1	0	0
-12	0	0	0	*-26	1	N/A	N/A
-12-RA	0	0	0	*-27	0	N/A	N/A
-12-RE	0	0	0	*-27-RA	0	N/A	N/A
-13	0	0	N/A	*-27-RE	0	N/A	N/A
-13-RA	0	0	N/A	*-28	0	0	N/A
-13-RE	0	0	N/A	*-28-RA	0	0	N/A
-14	1	N/A	N/A	*-28-RE	0	0	N/A
*-15	2	N/A	N/A	*-29	1	N/A	N/A
*-16	1	1	1	*-29-RA	1	N/A	N/A
*-16-RA	1	1	1	*-30	1	1	N/A
*-16-RE	1	1	1	*-30-RA	1	1	N/A

* PINS TO BE FLIPPED OPPOSITE OF SELECTIVE PLATING BEFORE BEING INSERTED



IN PROCESS 1 (SAME AS FIG. 1, DIFFERENT AS SHOWN) -T PLATING ONLY

PROPRIETARY NOTE
 **
THIS DOCUMENT CONTINUES CONFIDENTIAL AND
PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATTENT RIGHTS
AND SALES RIGHTS ARE EXPRESSIVE RESERVED BY SAMTEC,
INC, THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNALITHORIZED PERSON OR DRITTLY NOT
REPRODUCED TAMASFERRED ON KONFORGATE DI ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESSI
WITTEN CONSERVIT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1

