
REVISION L

RECOMMENDED PCB LAYOUT FOR QSH-XXX-01-X-D-EM2

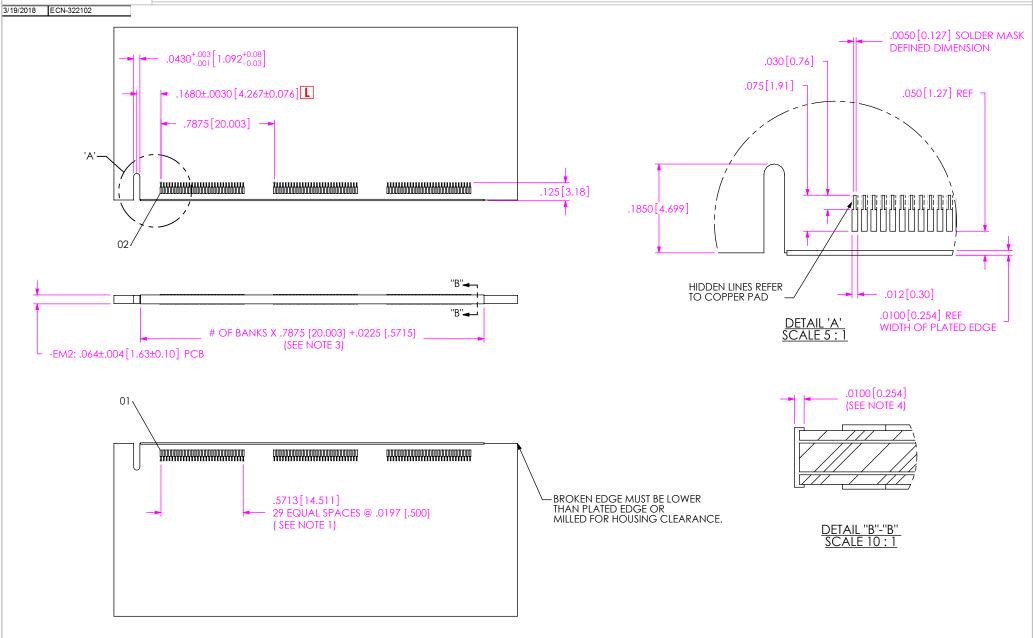

NOTES:

- 1. 1 BANK = 30 POSITIONS/SIDE FOR STANDARD VERSION.
- 2. NOTE DELETED.
- 3. PLATED EDGE MAY BE DIVIDED UP IN BANKS DEPENDING UPON DESIGNED
- 4. REVIEW THE "EDGE MOUNT Q1 INTERFACES" ON THE PROCESSING LITERATURE SECTION OF SAMTEC.COM.

PROPRIETARY NOTE


THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY WRITTEN CONSENT OF SAMTEC, INC.




REVISION L


RECOMMENDED STENCIL LAYOUT FOR QSH-XXX-01-X-D-EM2

NOTES: 1. STENCIL TO BE .0060[0.152] THICK 2. NOTE DELETED.





STENCIL APPLICATION SCALE 6:1 ALIGN EDGES AS SHOWN

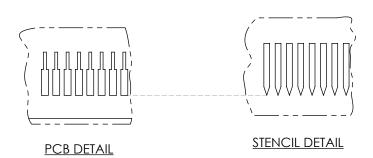

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

