




High Speed Characterization Report

6QDPS-XXX-XX.X-STR-TTL-2


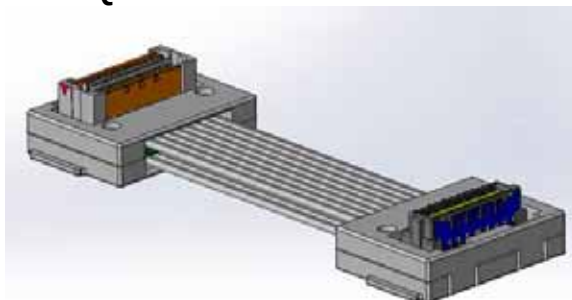


Mated with:

QFSS-016-01-X-D-DP

and

QMSS-016-11-X-D-DP

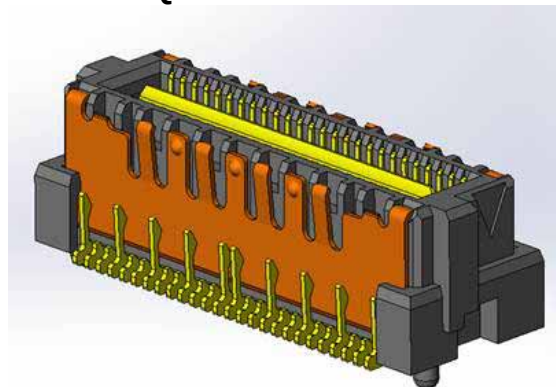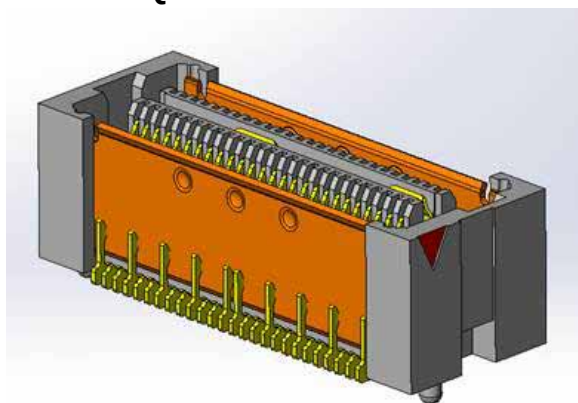

Description:

**Cable Assembly, 0.635 mm Pitch,
Q2™ Shielded High Speed Twinax Cable**

Series: 6QDPS**Description:** Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Table of Contents

Cable Assembly Overview	1
Cable Assembly Speed Rating.....	2
Eye Pattern Summary	3
Frequency Domain Data Summary	5
Bandwidth Chart – Differential Insertion Loss	6
Time Domain Data Summary	7
Characterization Details	9
Differential and Single-Ended Data.....	9
Cable assembly Signal to Ground Ratio	9
Eye Diagram Data	11
Frequency Domain Data	11
Time Domain Data	11
Appendix A – Eye Diagrams	13
Appendix B – Frequency Domain Response Graphs	17
Differential Application – Insertion Loss	17
Differential Application – Return Loss	18
Differential Application – NEXT Configurations	19
Differential Application – FEXT Configurations	21
Differential Application – Differential to Common Mode Conversion.....	23
Appendix C – Time Domain Response Graphs.....	24
Differential Application – Input Pulse	24
Differential Application – Cable Assembly Impedance.....	25
Differential Application – Cable assembly Impedance	26
Differential Application – Propagation Delay.....	28
Appendix D – Product and Test System Descriptions	29
Product Description	29
Test System Description	29
PCB-100476-TST-XX Test Fixtures.....	29
PCB Fixtures	31
Appendix E – Test and Measurement Setup	32
N5230C Measurement Setup	32
Test Instruments	32
Test Cables & Adapters	32
DSA8200 Measurement Setup	33
Test Instruments	33
Test Cables & Adapters	33
Appendix F - Frequency and Time Domain Measurements	34
Eye Diagram Procedures.....	34
Eye Mask	35



Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Rise Time	35
Frequency (S-Parameter) Domain Procedures	36
Time Domain Procedures	38
Propagation Delay (TDT)	38
Impedance (TDR).....	38
Appendix G – Glossary of Terms	39

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Cable Assembly Overview

The 0.635 mm (.025") 6QDPS Cable Assembly is constructed using Samtec 30 AWG, 100 Ω Shielded Twinax Ribbon Cable. The cables are terminated by soldering a small transition PCB - or termination board - at each end. Each termination board has a connector soldered to it. All cable assemblies are terminated with a QFSS-DP high speed socket at one end and a QMSS-DP high speed header at the other end. There are two types of QXSS connector positions, edge-mount (EM) and vertical mount (DV). The cable assembly is wired to facilitate a Pin 1 to Pin 2 mapping between the cable terminations. The 6QDPS series cable assemblies are available in 16, 32, 48 and 64 differential pairs. The data in this report is only applicable to 250 mm and 1000 mm length cable assembly.

Each 6QDPS cable assembly was tested by mating it to a QMSS-DP Socket at the first end and a QFSS-DP at the second end. The actual part numbers that were tested are shown in Table 1, which also identifies End 1 and End 2 of each assembly. A relative sample picture is shown in Figure1. Two differential pairs, a Long Path and a Short Path, of each assembly type were tested.

Length	Part Number	End 1	End 2
250 mm	6QDPS-016-09.8-STR-TTL-2	STR	TTL
1000 mm	6QDPS-016-39.4-STR-TTL-2	STR	TTL

Table 1: Sample Description



Figure 1: Test Sample

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Cable Assembly Speed Rating

The cable assembly Speed Rating is based on the -7 dB insertion loss point of the mated cable assembly. The -7 dB point can be used to estimate usable system bandwidth in a typical two-level signaling environment.

To calculate the Speed Rating, the measured -7 dB point is rounded up to the nearest half-GHz level. The up-rounding corrects for any loss from the test board traces. The resulting loss value is then doubled to determine the approximate maximum data rate in Gigabits per second (Gbps). The following table summarizes the Cable Assembly Speed Ratings for the 6QDPS cable assemblies tested.

Assembly		-7 dB Frequency	Speed Rating
6QDPS-016-09.8-STR-TTL-2	Long Row	5.5 GHz	11 Gbps
	Short Row	5 GHz	10 Gbps
6QDPS-016-39.4-STR-TTL-2	Long Row	5.5 GHz	11 Gbps
	Short Row	4.5 GHz	9 Gbps

Table 2: Cable Assembly Speed Rating

The Samtec Speed Rating is best considered a figure of merit for comparing relative performance between cable assemblies. The Speed Rating becomes less meaningful in systems using multi-level signaling or where crosstalk or impedance mismatch are more critical parameters. Modern high-speed digital transceivers can accommodate roughly 9 dB of loss and still operate reliably. The -7 dB rating is a conservative number that allocates 2 dB of system budget for other channel components such as short PCB traces and IC packaging effects.

Series: 6QDPS


Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Eye Pattern Summary

6QDPS-016-09.8-STR-TTL-2

Long Row Output Eye: 11 Gbps

Short Row Output Eye: 10 Gbps

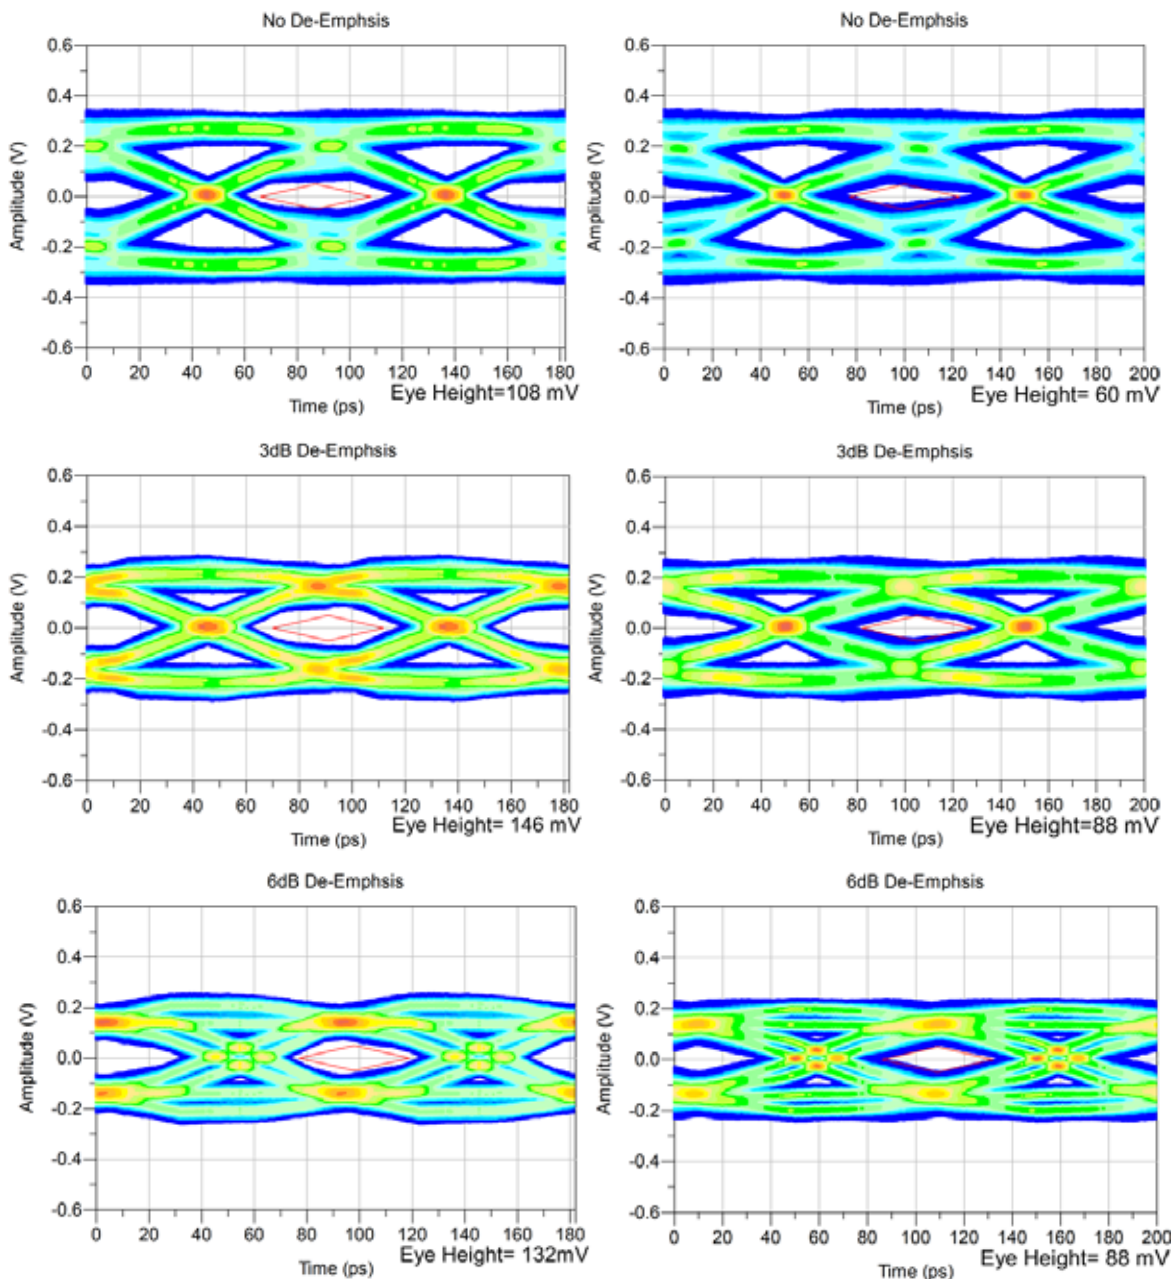


Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

6QDPS-016-39.4-STR-TTL-2

Long Row Output Eye: 11 Gbps

Short Row Output Eye: 9 Gbps


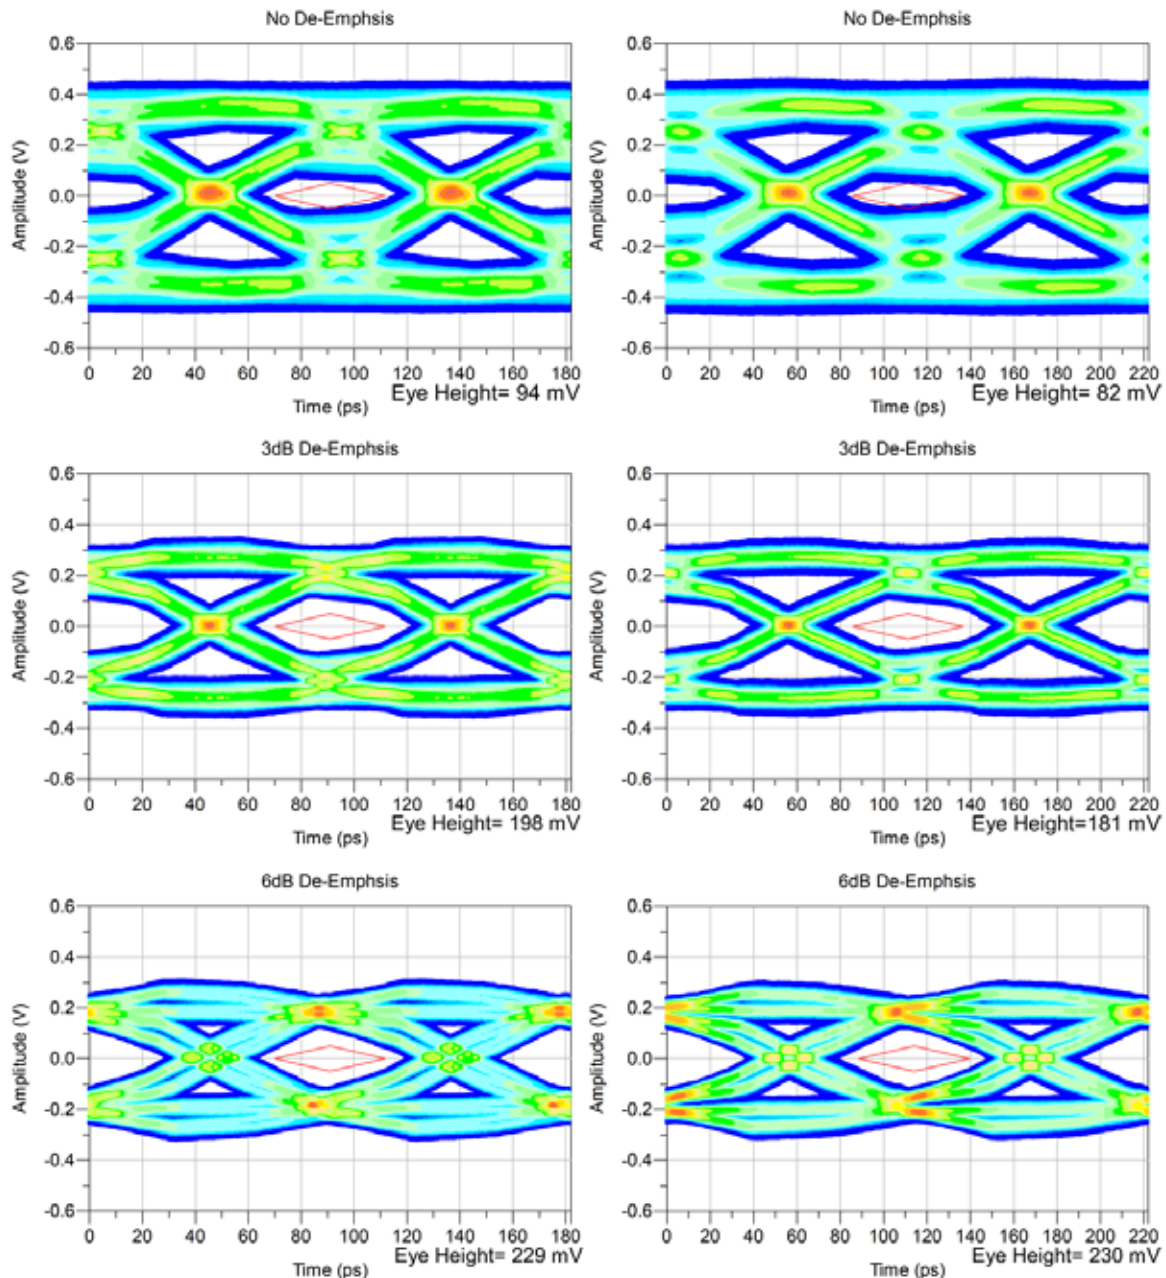


Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Frequency Domain Data Summary

Table 3 - Differential Connector System Performance					
Test Parameter	Configuration	Driver	Receiver	0.25m	1m
Insertion Loss	Long Row	STR_21,23	TTL_22,24	7dB@ 5.44 GHz	7dB@ 5.05 GHz
	Short Row	STR_10,12	TTL_9,11	7dB@ 4.58 GHz	7dB@ 4.20 GHz
Return Loss	Long Row	STR_21,23	STR_21,23	>10dB to 0.7 GHz	>10dB to 0.71 GHz
	Short Row	STR_10,12	STR_10,12	>10dB to 0.69 GHz	>10dB to 0.61 GHz
Near-End Crosstalk	In Row: Long Row	STR_21,23	STR_15,17	<-20dB to 7.03 GHz	<-20dB to 7.33 GHz
	Across Row	STR_21,23	STR_22,24	<-20dB to 20 GHz	<-20dB to 20 GHz
	In Row: Short Row	STR_10,12	STR_4,6	<-20dB to 10 GHz	<-20dB to 16.45 GHz
	Across Row	STR_10,12	STR_9,11	<-20dB to 20 GHz	<-20dB to 20 GHz
Far-End Crosstalk	In Row: Long Row	STR_21,23	TTL_16,18	<-20dB to 6.44 GHz	<-20dB to 11.88 GHz
	Across Row	STR_21,23	TTL_21,23	<-20dB to 20 GHz	<-20dB to 20 GHz
	In Row: Short Row	STR_10,12	TTL_3,5	<-20dB to 11.2 GHz	<-20dB to 20 GHz
	Across Row	STR_10,12	TTL_10,12	<-20dB to 20 GHz	<-20dB to 20 GHz

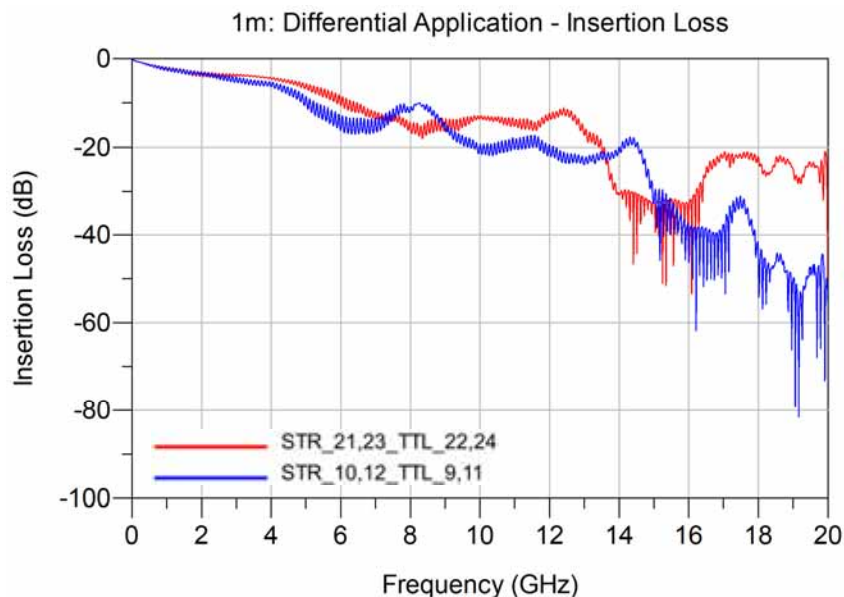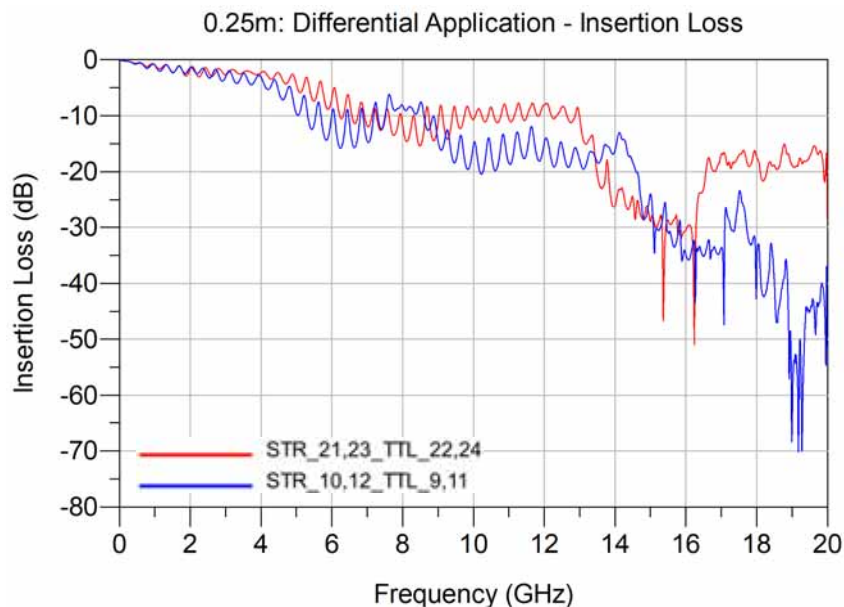
Series: 6QDPS**Description:** Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable**Bandwidth Chart – Differential Insertion Loss**

Series: 6QDPS


Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Time Domain Data Summary

0.25m: Differential Application - Impedance

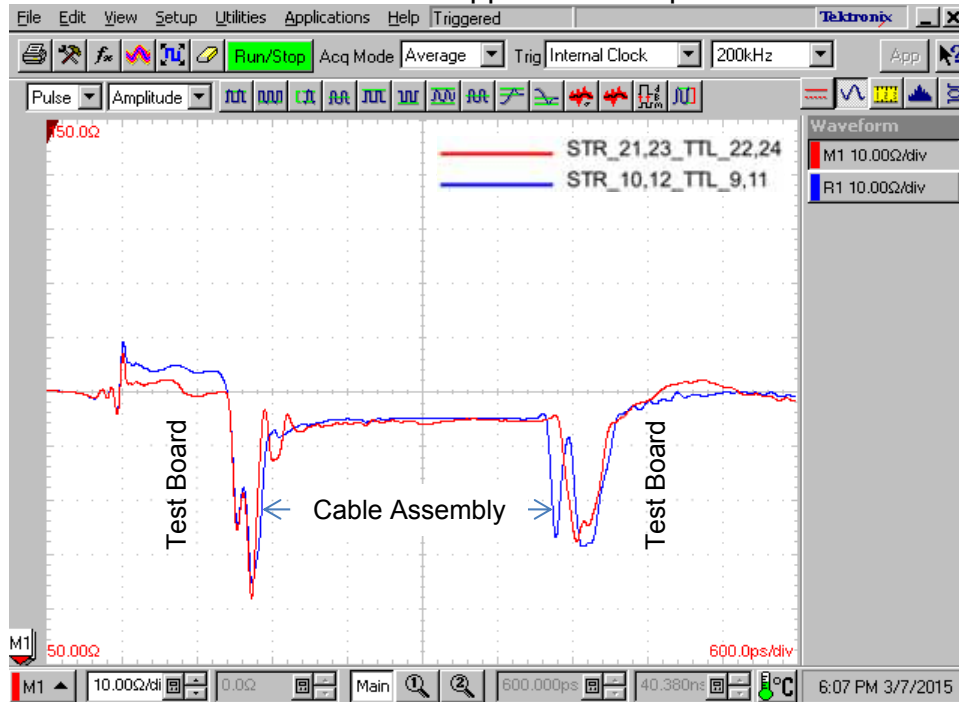

1m: Differential Application - Impedance

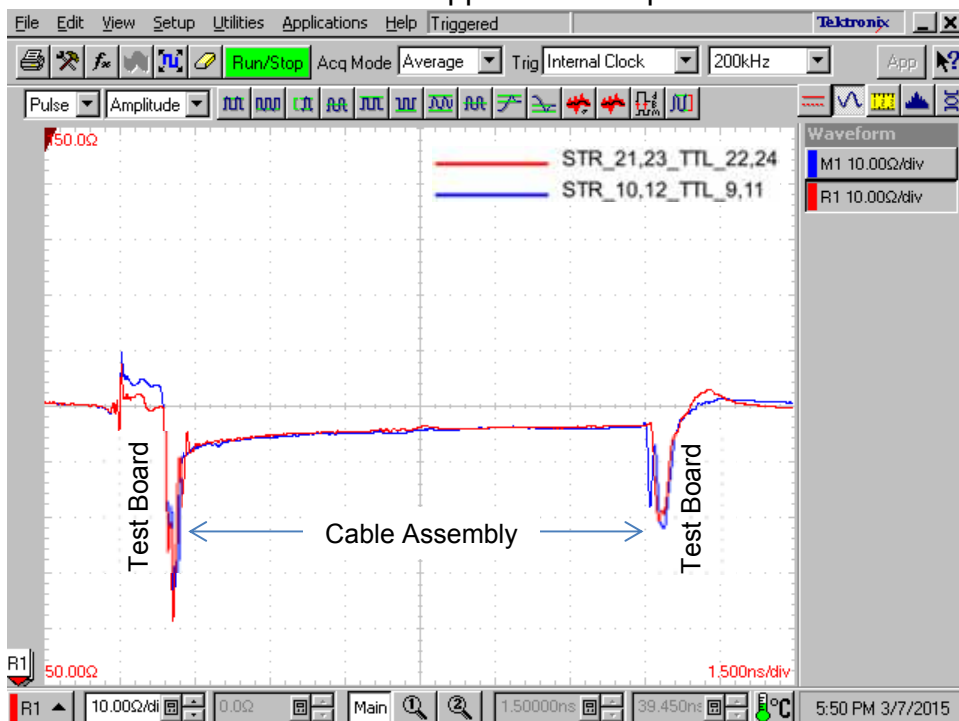

Series: 6QDPS**Description:** Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Table 4 - Propagation Delay (Cable Assembly)		
Cable length	Driver/ Receiver	Driver/ Receiver
	STR_21,23/ TTL_22,24	STR_10,12/ TTL_9,11
0.25m	1.436ns	1.457ns
1m	5.000ns	5.020ns

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Characterization Details

This report presents data that characterizes the signal integrity response of a cable assembly in a controlled printed circuit board (PCB) environment. All efforts are made to reveal typical best-case responses inherent to the system under test (SUT).

In this report, the SUT includes the mating connectors, cable assembly, and footprint effects on a typical multi-layer PCB. PCB effects (trace loss) are de-embedded from test data. Board related effects, such as pad-to-ground capacitance, are included in the data presented in this report.

Additionally, intermediate test signal connections can mask the cable assembly's true performance. Such connection effects are minimized by using high performance test cables and adapters. Where appropriate, calibration and de-embedding routines are also used to reduce residual effects.

Differential and Single-Ended Data

Most Samtec cable assemblies can be used successfully in both differential and single-ended applications. However, electrical performance will differ depending on the signal drive type. In this report, data is presented for "GSSG" differential drive configuration only.

Cable assembly Signal to Ground Ratio

Samtec cable assemblies are most often designed for generic applications and can be implemented using various signal and ground pin assignments. In high speed systems, provisions must be made in the interconnect for signal return currents. Such paths are often referred to as "ground". In some cable assemblies, a ground plane or blade, or an outer shield, is used as the signal return, while in others, cable assembly pins are used as signal returns. Various combinations of signal pins, ground blades, and shields can also be utilized. Electrical performance can vary significantly depending upon the number and location of ground pins.

In general, the more pins dedicated to ground, the better electrical performance will be. But dedicating pins to ground reduces signal density of a cable assembly. Therefore, care must be taken when choosing signal/ground ratios in cost or density-sensitive applications.

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

For this cable assembly, the following array configurations are evaluated:

Differential Impedance:

- Long Row (upper terminals, furthest from test fixture)
- Short Row (bottom terminals, closest to test fixture)

Differential Crosstalk:

- In Row: Long Row (adjacent terminals in the long row)
- In Row: Short Row (adjacent terminals in the short row)
- Across Row: "Xrow": (from one row of terminals to the other row)

See Appendix D – Product and Test System Descriptions for details

Only one differential pair was driven for crosstalk measurements.

Other configurations can be evaluated upon request. Please contact sig@samtec.com for more information.

In a real system environment, active signals might be located at the outer edges of the signal contacts of concern, as opposed to the ground signals utilized in laboratory testing. For example, in a single-ended system, a pin-out of "SSSS", or four adjacent single ended signals might be encountered as opposed to the "GSG" and "GSSG" configurations tested in the laboratory. Electrical characteristics in such applications could vary slightly from laboratory results. But in most applications, performance can safely be considered equivalent.

Signal Edge Speed (Rise Time)

In pulse signaling applications, the perceived performance of the interconnect can vary significantly depending on the edge rate or the rise time of the exciting signal. For this report, the fastest rise time used was 30 ps. Generally, this should demonstrate the worst-case performance.

In many systems, the signal edge rate will be significantly slower at the cable assembly than at the driver launch point. To estimate interconnect performance at other edge rates, data is provided for several rise times between 30ps and 500ps.

Unless otherwise stated, measured rise times were at 10%-90% signal levels.

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Eye Diagram Data

Eye patterns are a time domain characterization of system level performance. Eye patterns are generated by sending continuous streams of data from a transmitter to a receiver, and overlaying the received signals upon one another. Over time, the received data builds to resemble an eye. Negative SI effects in the transmission path can cause the signal to distort, which over time, will cause the eye to “close”. Specifications, such as an eyemask template, can be placed on the amount of open area required in the eye to ensure a functional system.

An eyemask template is a representation of the receiver’s sensitivity and is often used as a metric of performance. While there are lot-to-lot and vendor-to-vendor variations in receiver sensitivity, some general guidelines can be developed. After reviewing several major industry standards (PCIe, Gigabit Ethernet), we find similar eyemask requirements and we will use these as the basis for a generic template in this report. For this report, we will assume a receiver amplitude sensitivity of 50 mVpp and a jitter margin of 0.5 UI. This results in a diamond shape eyemask template that is 50 mV high and 0.5 UI wide.

Please contact our Signal Integrity Group at sig@samtec.com for more information.

Frequency Domain Data

Frequency Domain parameters are helpful in evaluating the cable assembly system’s signal loss and crosstalk characteristics across a range of sinusoidal frequencies. In this report, parameters presented in the Frequency Domain are Insertion Loss, Return Loss, Near-End and Far-End Crosstalk, and Mode Conversion. Other parameters or formats, such as VSWR or S-Parameters, may be available upon request. Please contact our Signal Integrity Group at sig@samtec.com for more information.

Frequency performance characteristics for the SUT are generated from network analyzer measurements.

Time Domain Data

Time Domain parameters indicate Impedance mismatch versus length, and signal propagation time in a pulsed signal environment. The measured S-Parameters from the network analyzer are post-processed using Agilent ADS to obtain the time domain response. Time Domain procedure is provided in [Appendix F](#) of this report. Parameters or formats not included in this report may be available upon request. Please contact our Signal Integrity Group at sig@samtec.com for more information.

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

In this report, propagation delay is defined as the signal propagation time through the cable assembly, mating connectors, and connector footprint. It also includes 0.1 mils of PCB trace on each connector side. Delay is measured at 30 picoseconds signal rise-time. Delay is calculated as the difference in time measured between the 50% amplitude levels of the input and output pulses.

Data for other configurations may be available. Please contact our Signal Integrity Group at sig@samtec.com for further information.

Additional information concerning test conditions and procedures is located in the appendices of this report. Further information may be obtained by contacting our Signal Integrity Group at sig@samtec.com.


Series: 6QDPS


Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Appendix A – Eye Diagrams

6QDPS-016-09.8-STR-TTL-2

11Gbps: Long Row

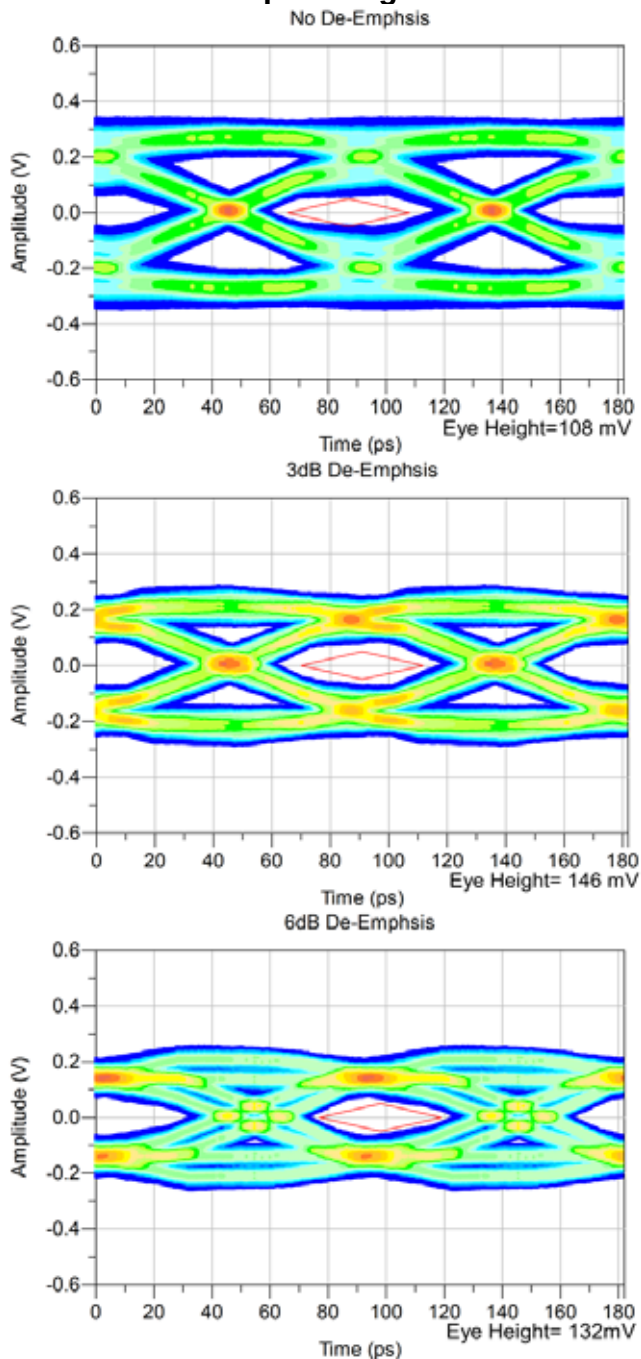

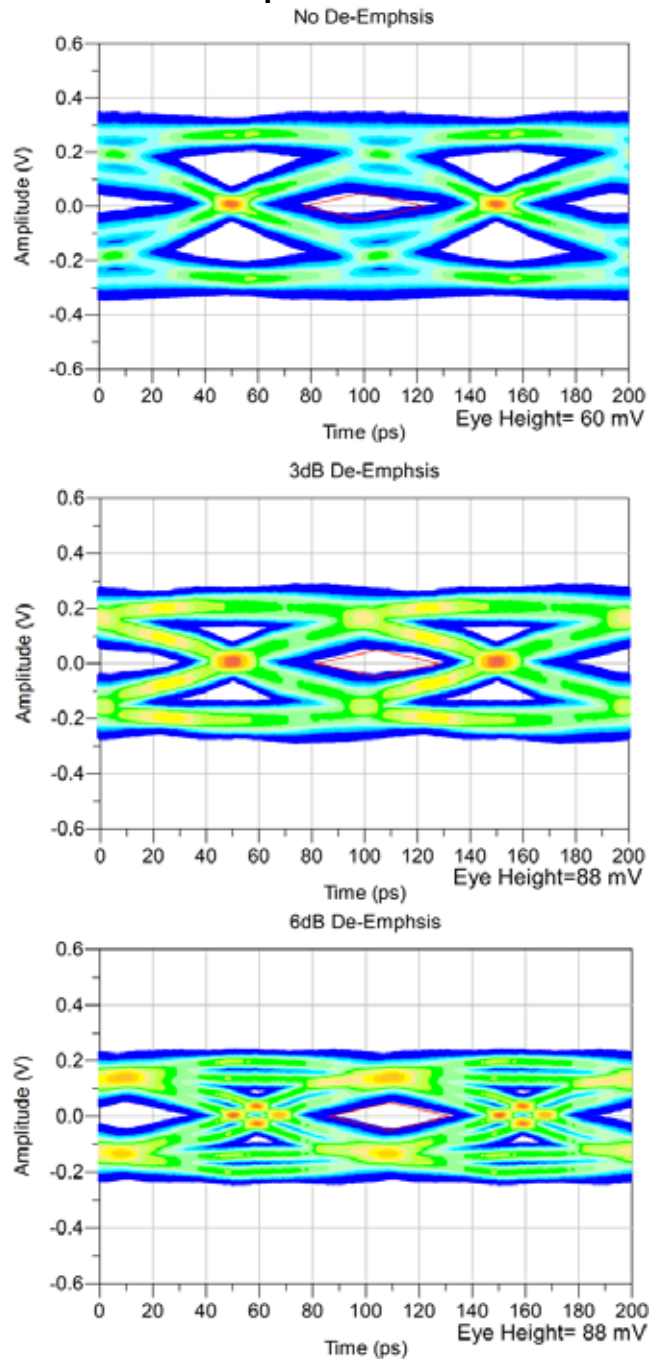
Series: 6QDPS**Description:** Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable**10Gbps: Short Row**

Series: 6QDPS**Description:** Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable


6QDPS-016-39.4-STR-TTL-2

11Gbps: Long Row


No De-Emphasis

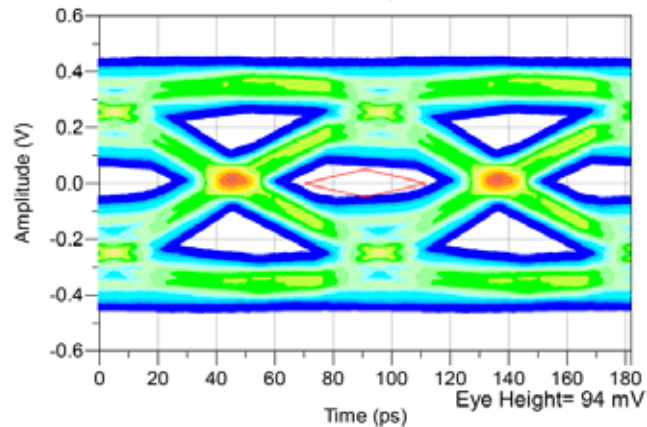


3dB De-Emphasis

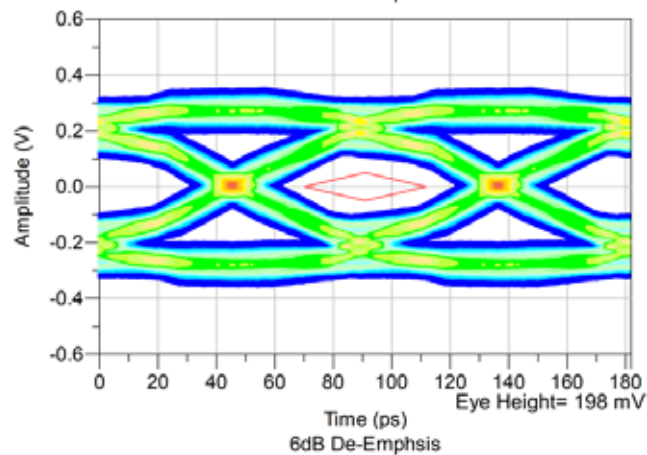

6dB De-Emphasis

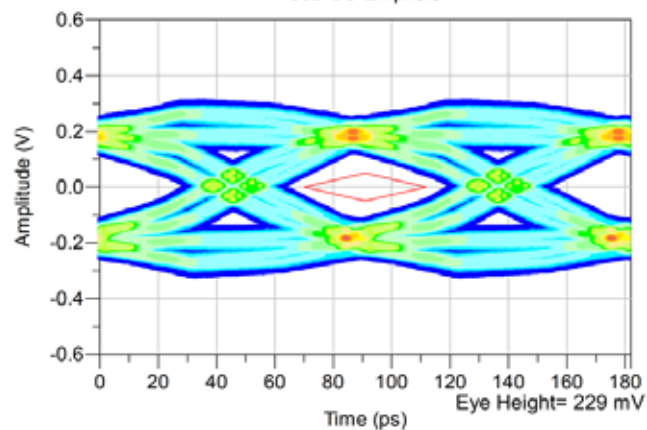


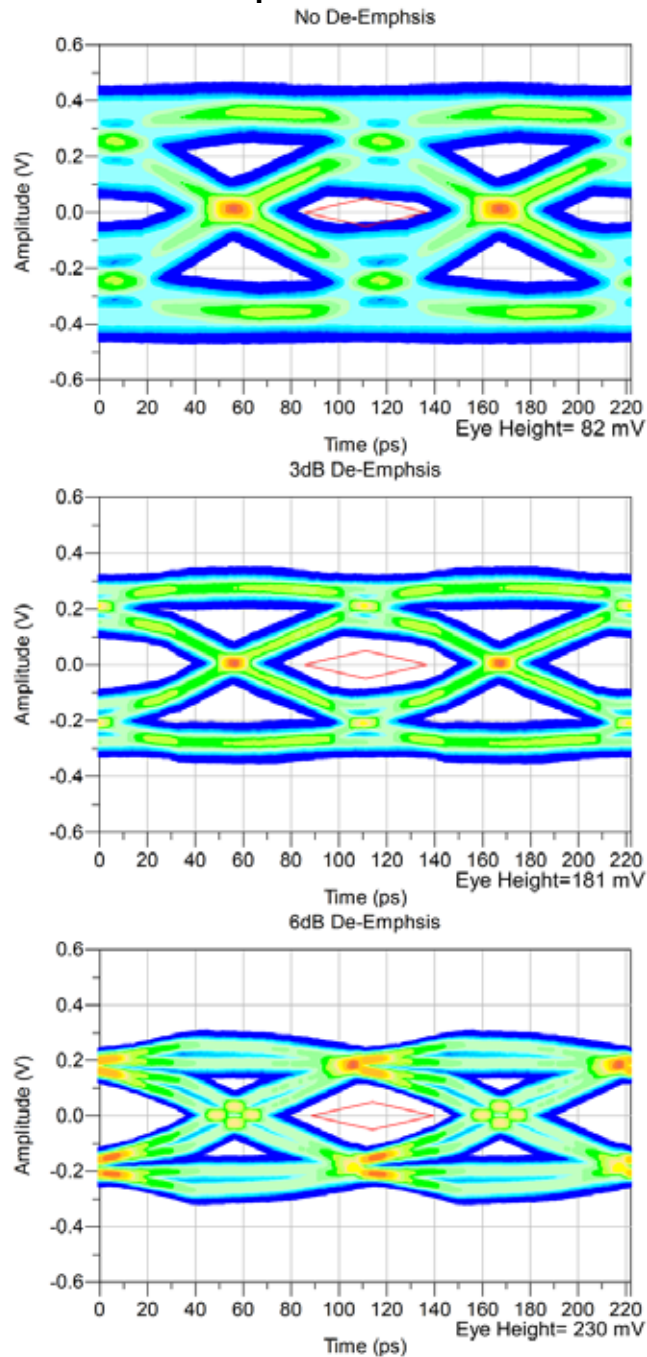
Series: 6QDPS**Description:** Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable**9Gbps: Short Row**

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Appendix B – Frequency Domain Response Graphs



Differential Application – Insertion Loss

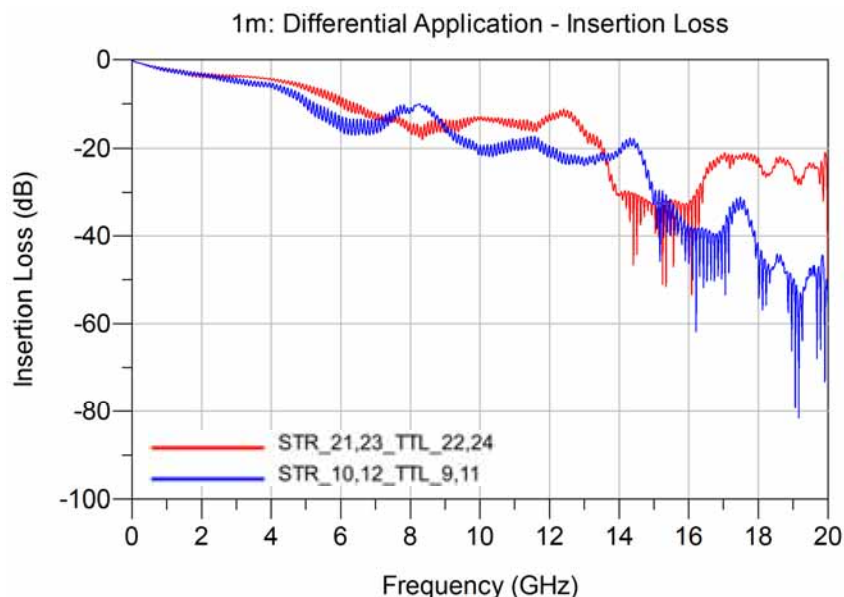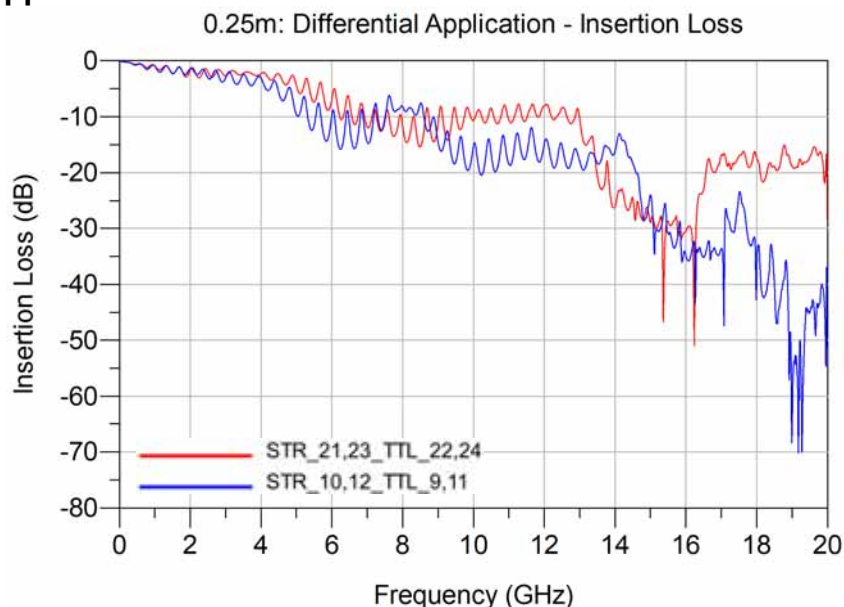

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Differential Application – Return Loss

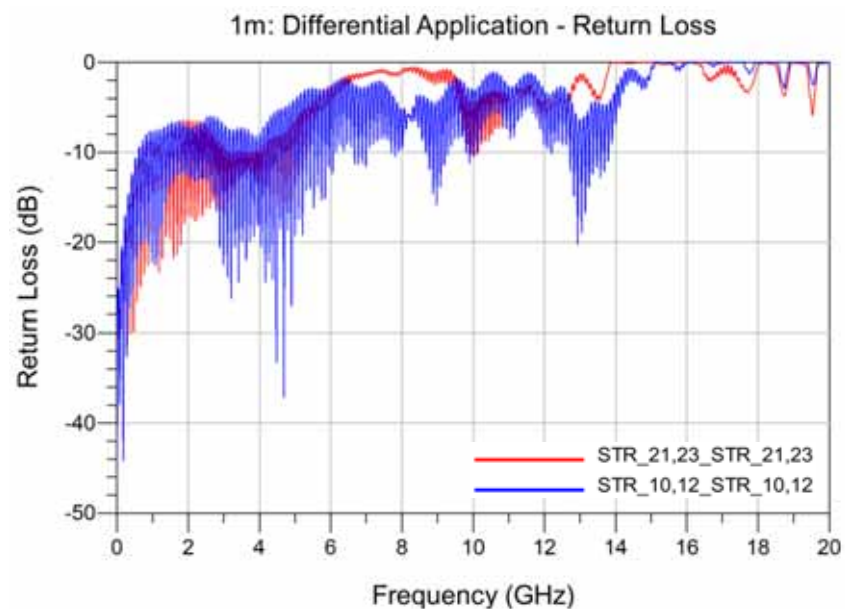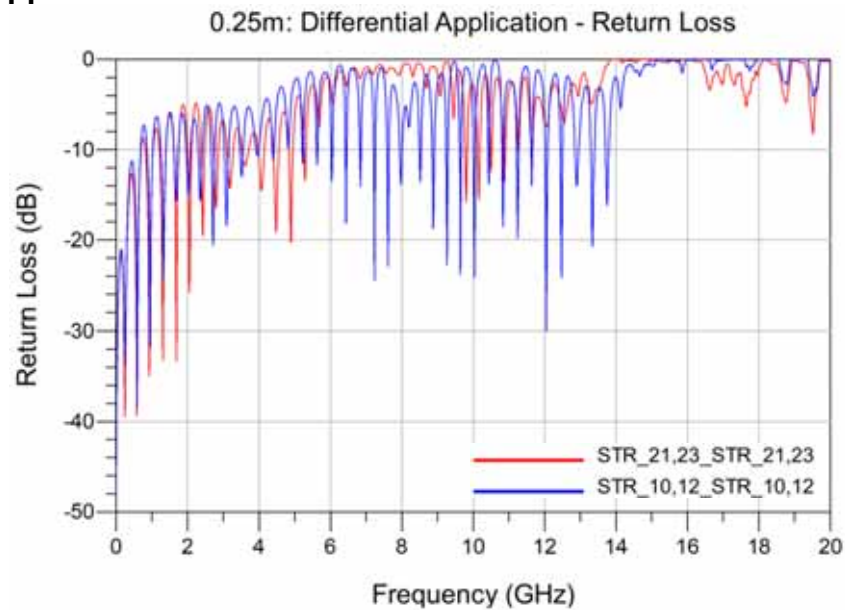


Series: 6QDPS


Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Differential Application – NEXT Configurations

0.25m: Differential Application - NEXT


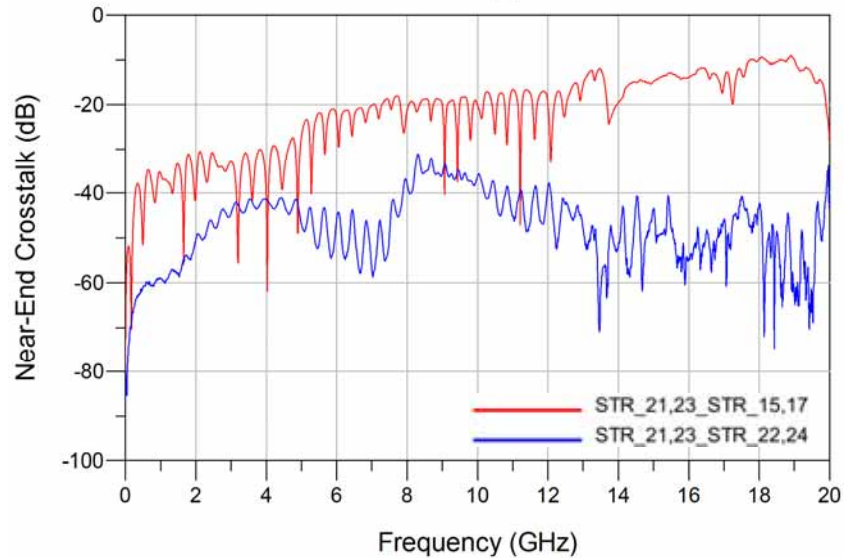


0.25m: Differential Application - NEXT

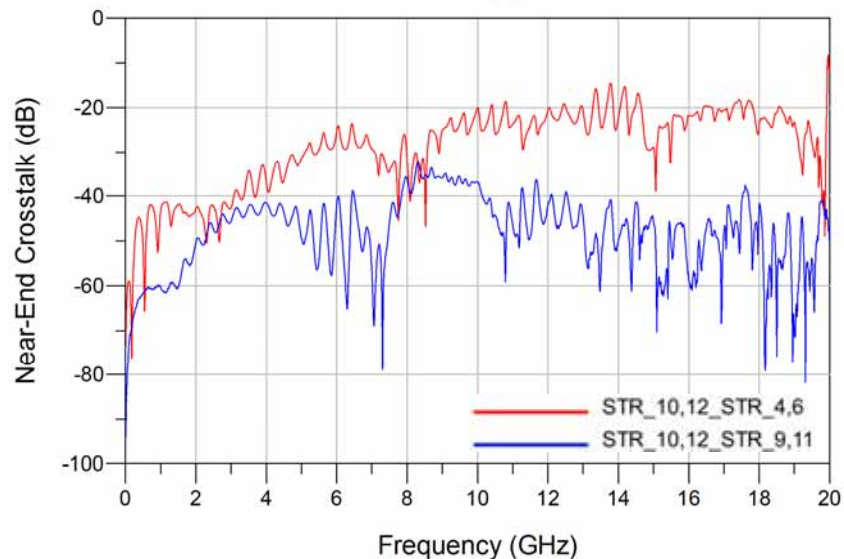

Series: 6QDPS



Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

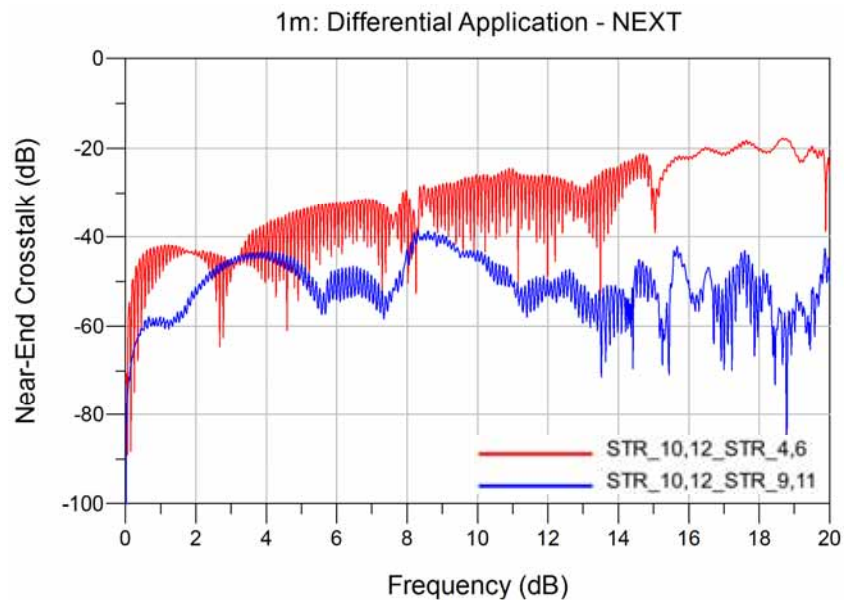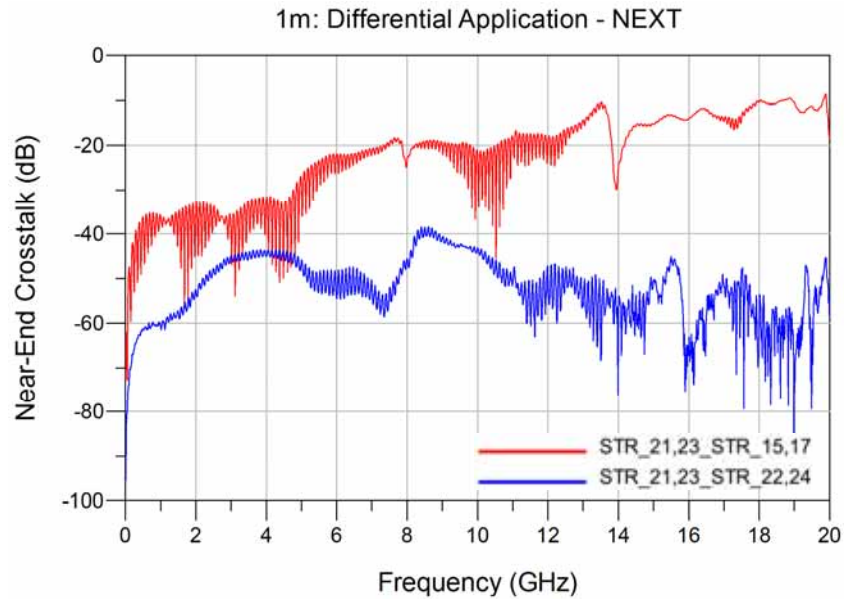

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable


Differential Application – FEXT Configurations

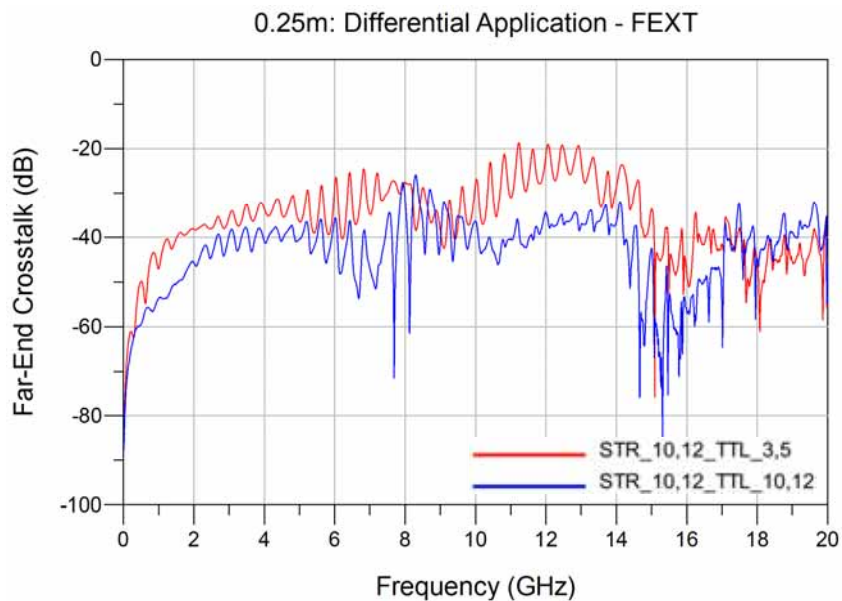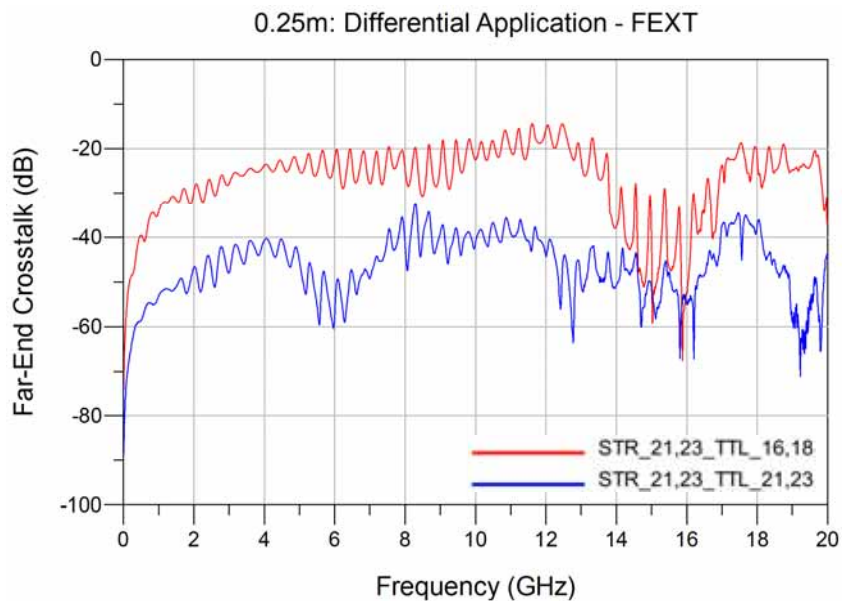


Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

1m: Differential Application - FEXT

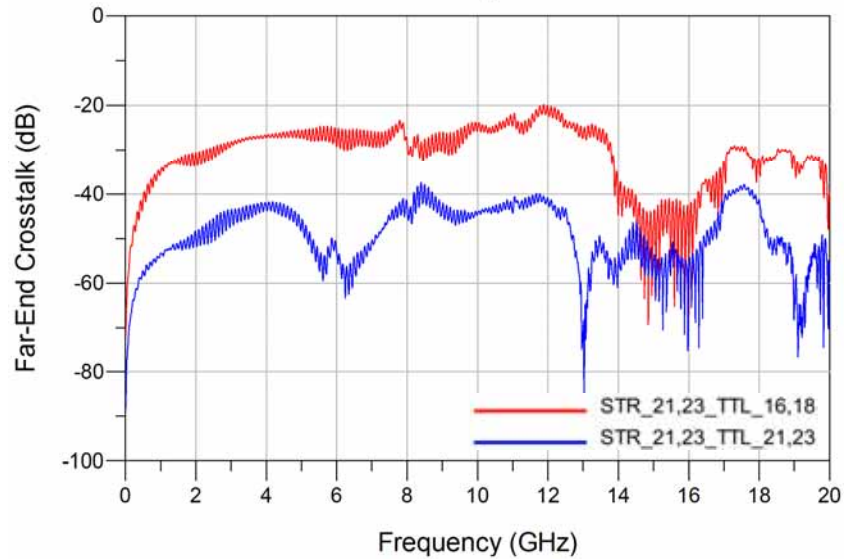



1m: Differential Application - FEXT

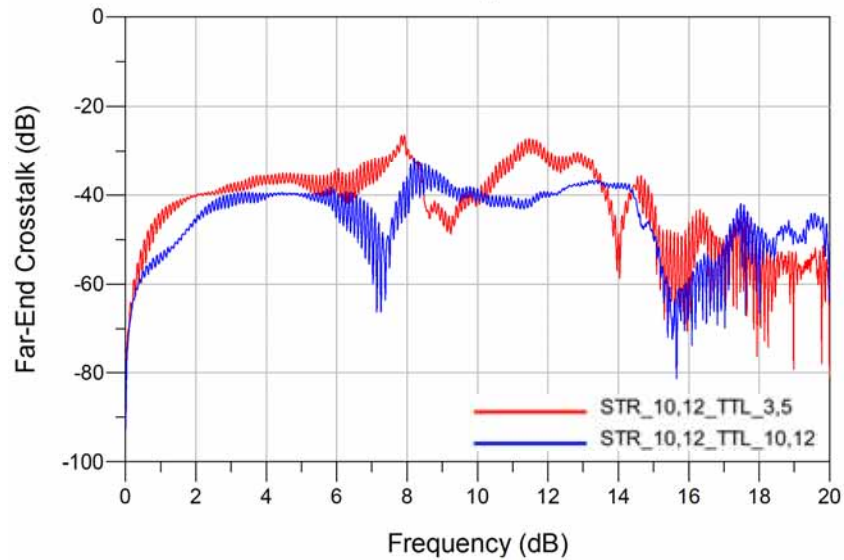

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Differential Application – Differential to Common Mode Conversion

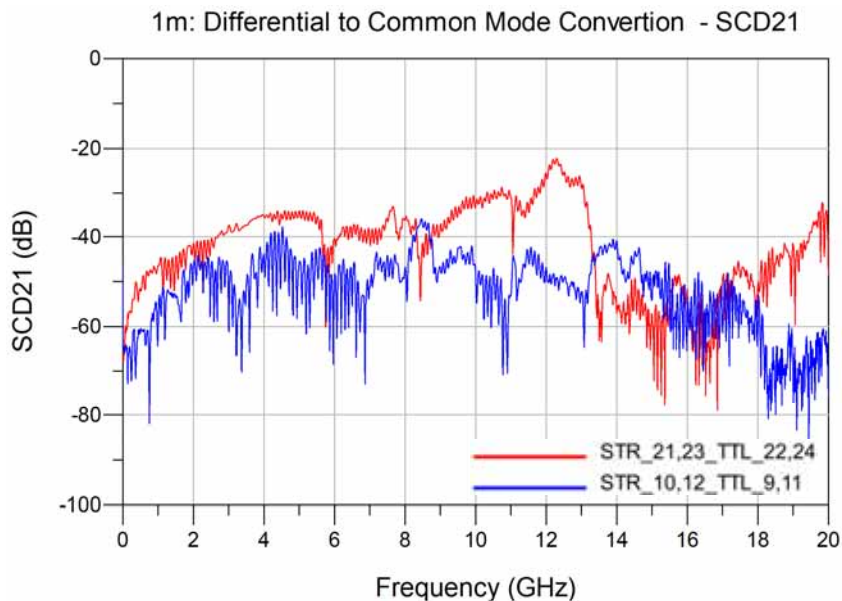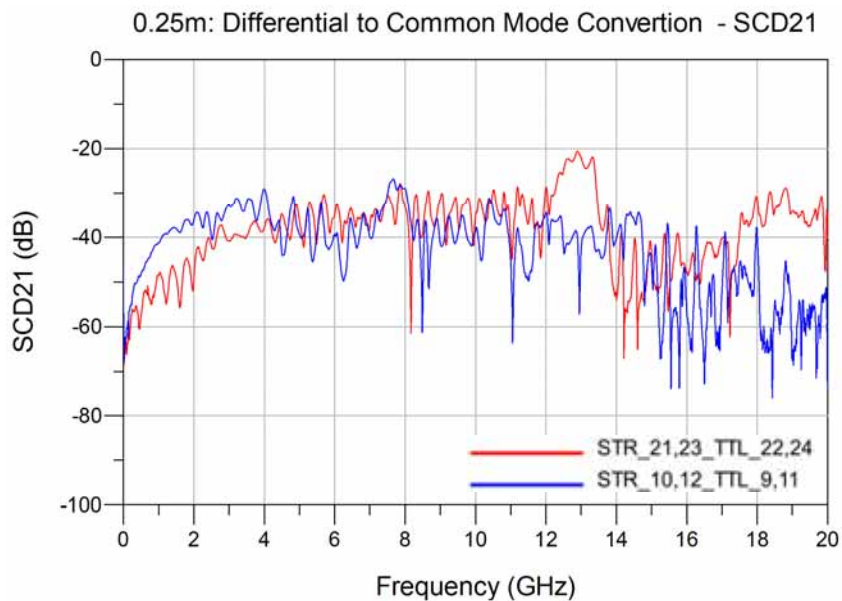


Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Appendix C – Time Domain Response Graphs

Differential Application – Input Pulse

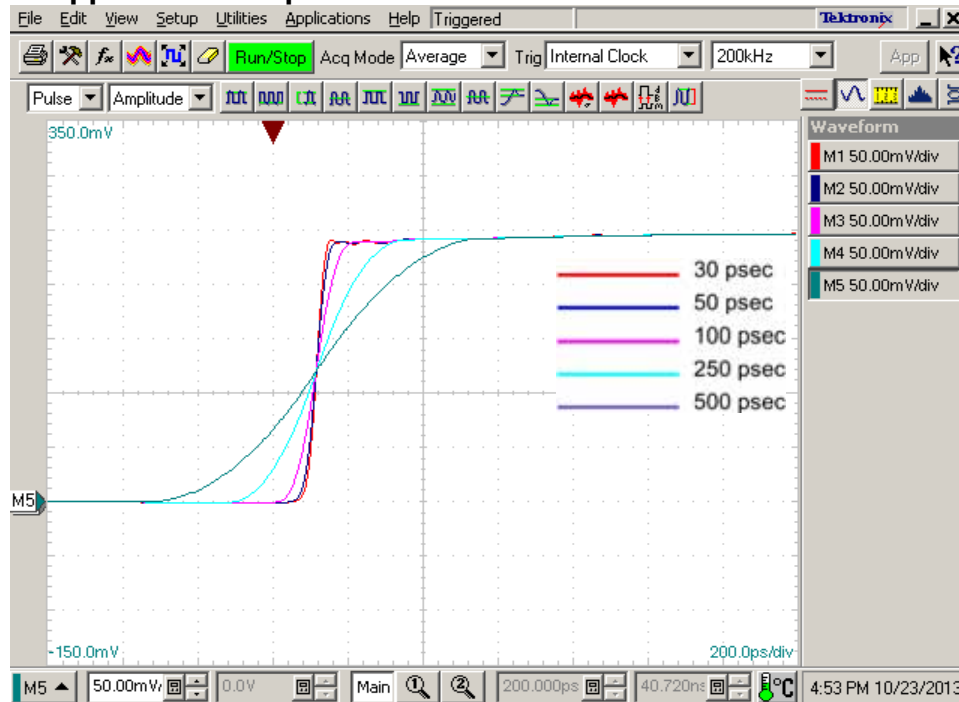


Series: 6QDPS


Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Differential Application – Cable Assembly Impedance

0.25m: Differential Application - Impedance

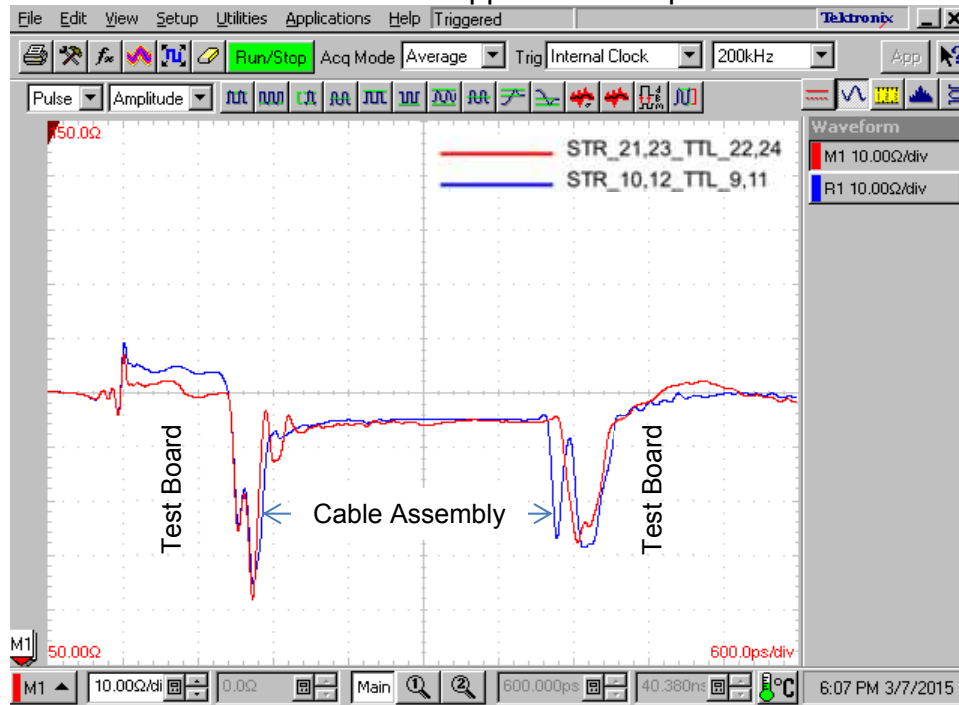

1m: Differential Application - Impedance


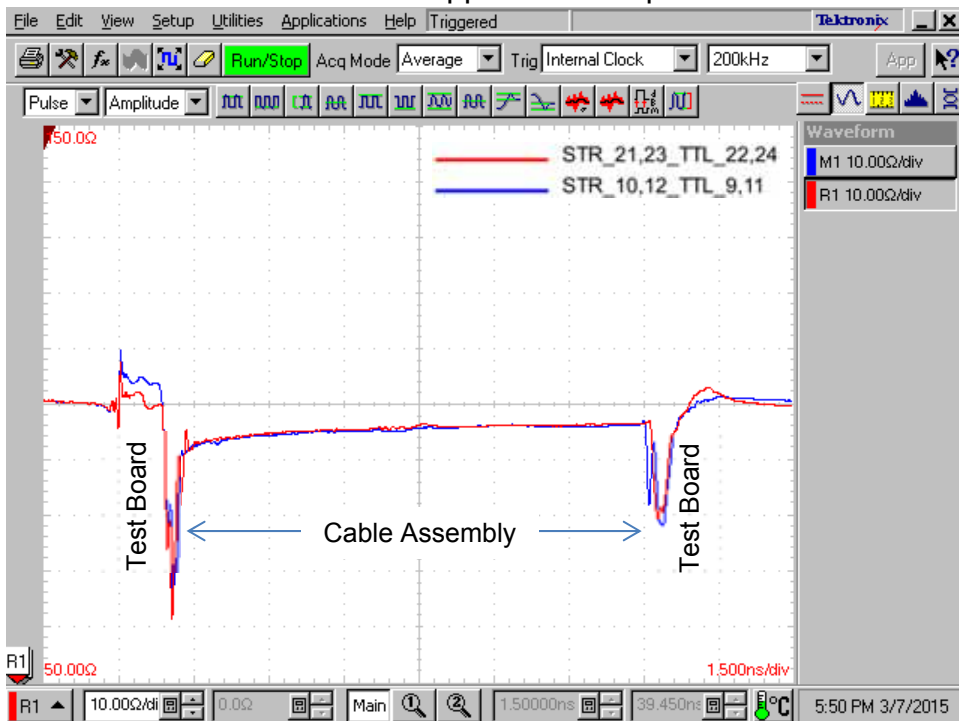


Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Differential Application – Cable assembly Impedance



6QDPS-016-09.8-STR-TTL-2

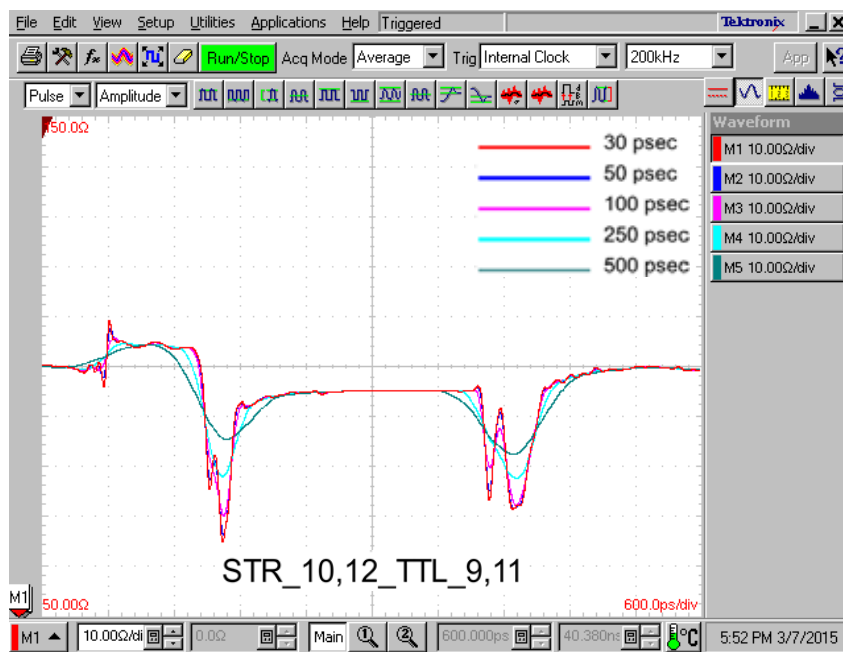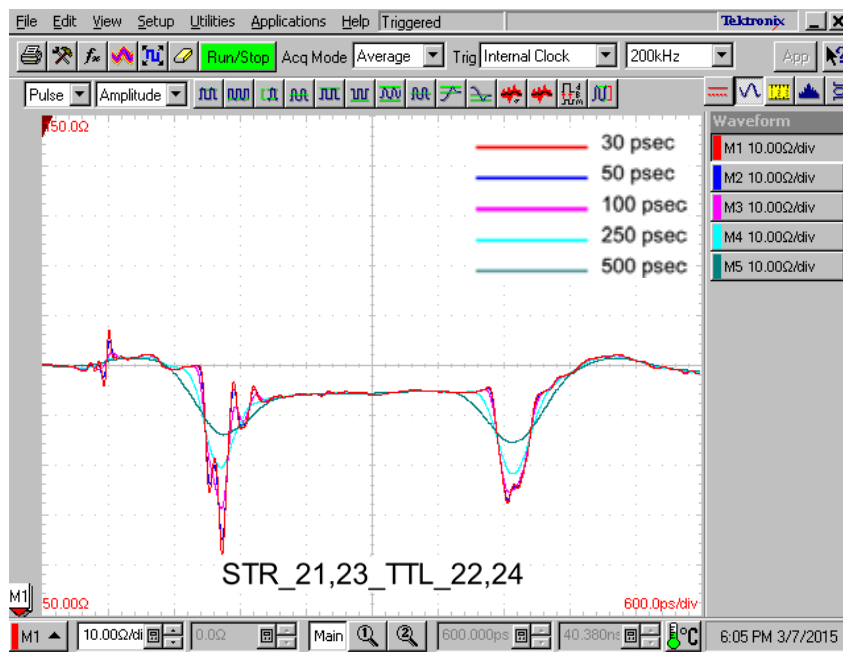

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable



6QDPS-016-39.4-STR-TTL-2

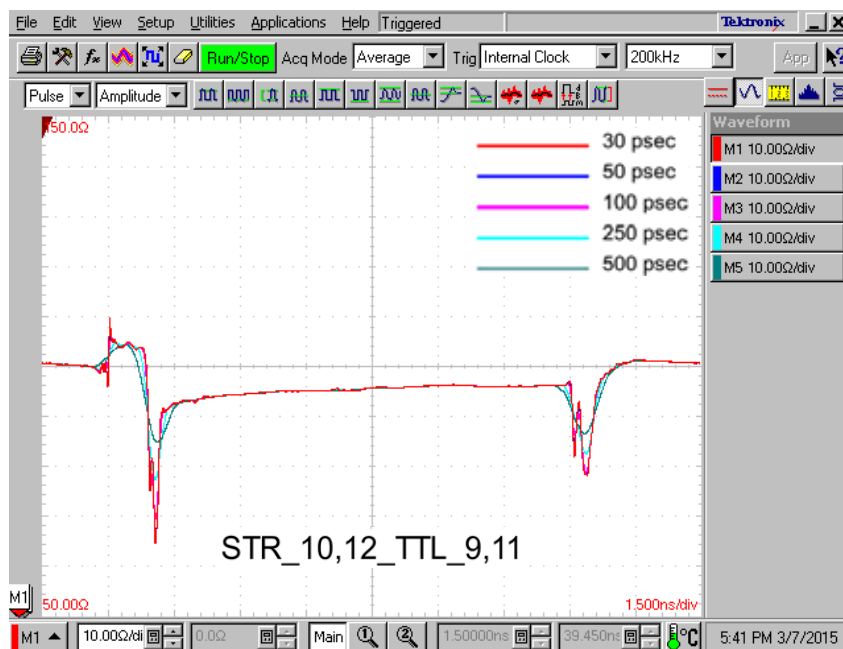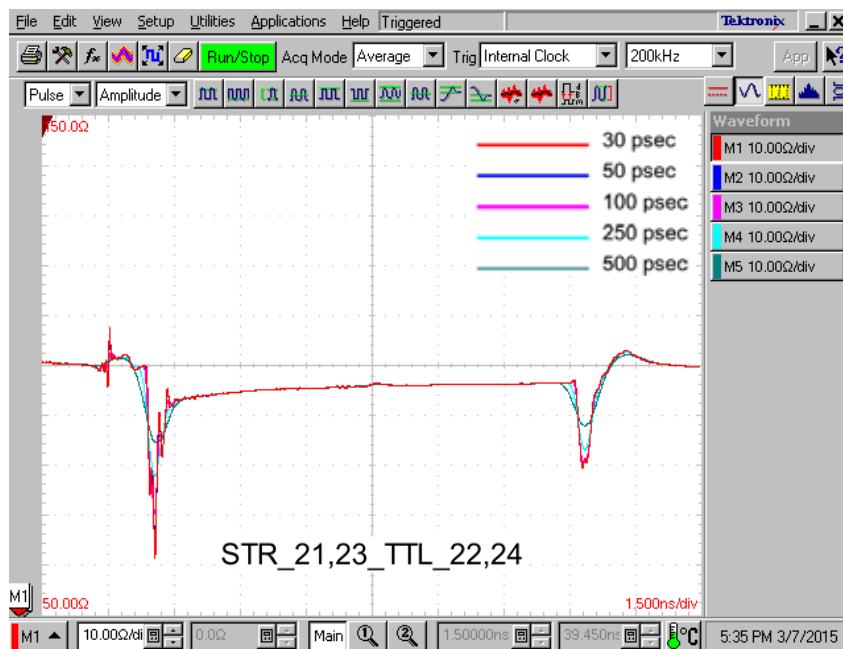

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Differential Application – Propagation Delay

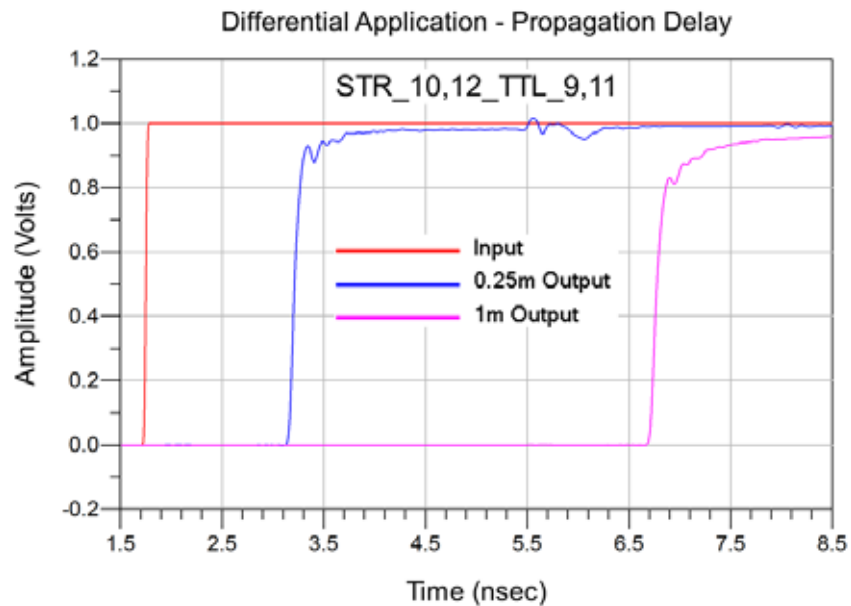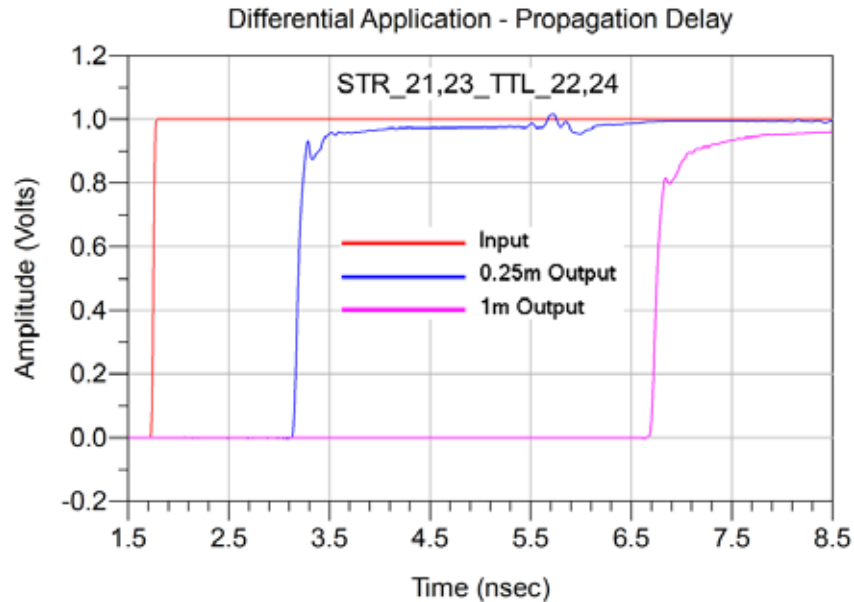

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Appendix D – Product and Test System Descriptions

Product Description

Product test samples are 0.635 mm Q2™ Shielded High Speed Twinax Cable Assemblies. The part numbers are 6QDPS-016-09.8-STR-TTL-2 and 6QDPS-016-39.4-STR-TTL-2. They mate with QFSS-016-01-X-D-DP and QMSS-016-11-X-D-DP. A photo of the mated test article mounted to SI test boards is shown below.

The cable assembly terminations had a particular signal line configuration. The respective signal line numbers are shown in Table 5. There are a total of 8 pairs per row. All adjacent lines are terminated where applicable.


G	3	5	G	9	11	G	15	17	G	21	23	G	29	31	G	35	37	G	41	43	G	47	49	G
G	4	6	G	10	12	G	16	18	G	22	24	G	30	32	G	36	38	G	42	44	G	48	50	G

Table 5: Respective signal line numbers as viewed from End 1

Test System Description

The test fixtures are composed of four-layer FR-4 material with 50Ω signal trace and pad configurations designed for the electrical characterization of Samtec high speed cable assembly products. A PCB mount SMA connector is used to interface the VNA test cables to the test fixtures. Optimization of the SMA launch was performed using full wave simulation tools to minimize reflections. Two test fixtures are specific to 6QDPS series cable assembly and identified by part numbers PCB-100476-TST-01 and 02. The Auto Fixture Removal (AFR) calibration structures designed specifically for the 6QDPS series are located on both the test boards. Displayed on the following pages is the information for the 6QDPS and AFR calibration structure and directives for the mating 6QDPS fixtures.


PCB-100476-TST-XX Test Fixtures

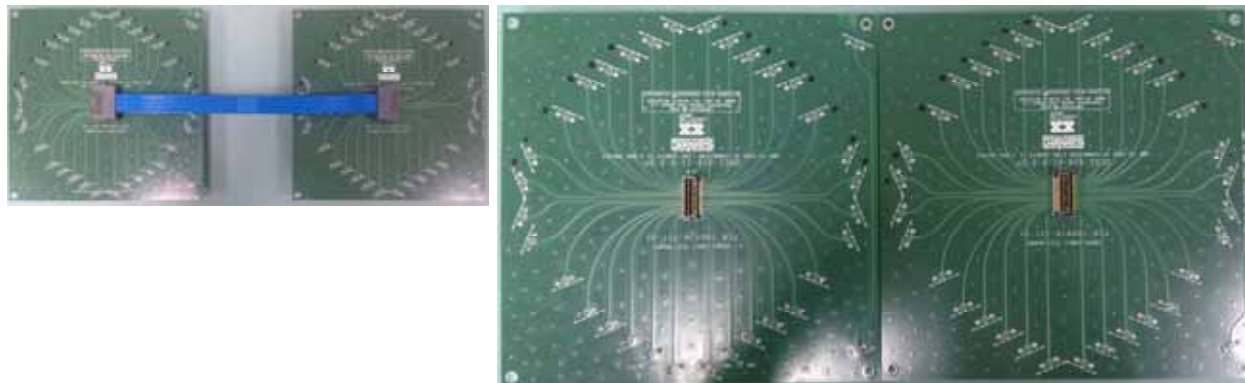

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Artwork of the PCB design is shown below.

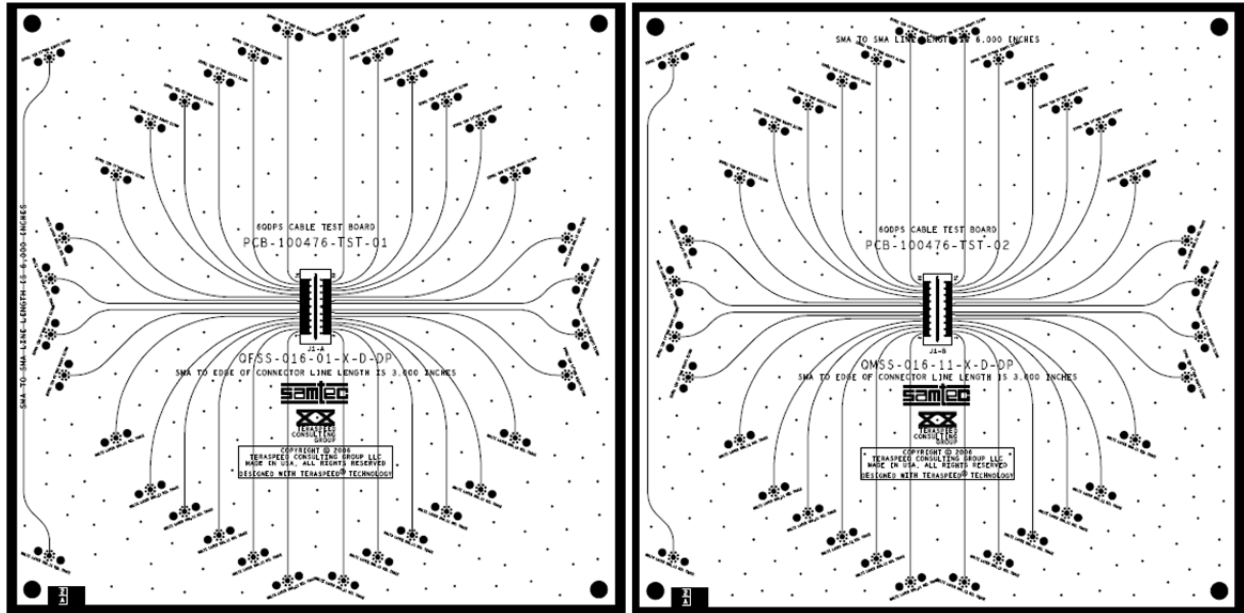


Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

PCB Fixtures

The test fixtures used are as follows:

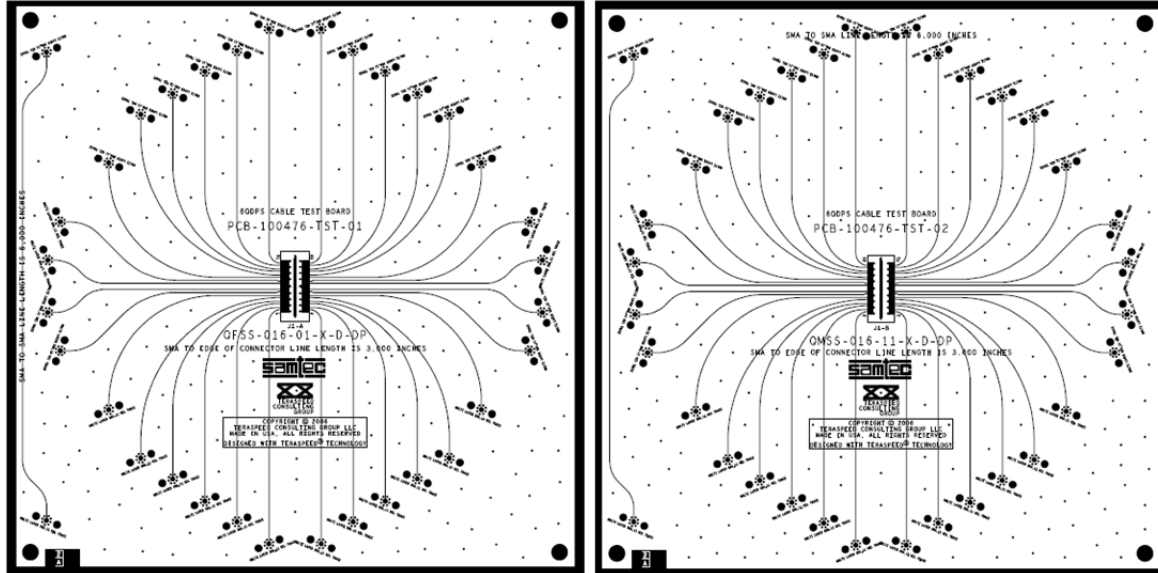

PCB-100476-TST-01 – 6QDPS Cable Test Board 1

PCB-100476-TST-02 – 6QDPS Cable Test Board 2

The through locate on PCB-100476-TST-01 and 02.

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Appendix E – Test and Measurement Setup

For frequency domain measurements, the test instrument is the Agilent N5230C PNA-L network analyzer. Frequency domain data and graphs are extracted from the instrument by AFR application. Post-processed time domain data and graphs are generated using convolution algorithms within Agilent ADS. The network analyzer is configured as follows:

Start Frequency – 300 KHz


Number of points -1601

Stop Frequency – 20 GHz

IFBW – 1 KHz

With these settings, the measurement time is approximately 20 seconds.

N5230C Measurement Setup

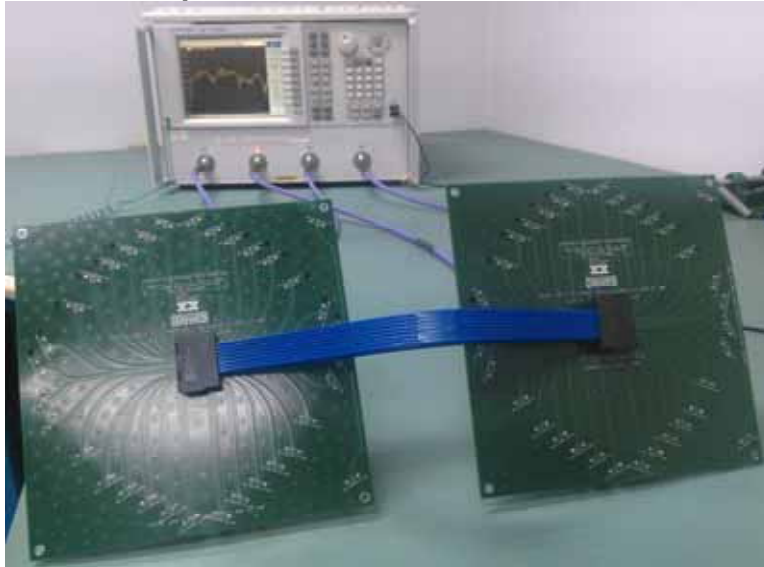

Test Instruments

<u>QTY</u>	<u>Description</u>
1	Agilent N5230C PNA-L Network Analyzer (300 KHz to 20 GHz)
1	Agilent N4433A ECAL Module (300 KHz to 20 GHz)

Test Cables & Adapters

<u>QTY</u>	<u>Description</u>
4	Gore OWD01D02039-4 (DC-26.5 GHz)

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

For impedance measurements, the test instrument is the Tektronix DSA8200 Digital Serial Analyzer mainframe and 80E04 sampling module. The impedance data and profiles are obtained directly from the instrument. The Digital Analyzer is configured as follows:

Vertical Scale: 10 ohm / Div:
Offset: Default / Scroll
Horizontal Scale: 600ps/ Div or 1.5ns/ Div
Record Length: 4000
Averages: ≥ 16

DSA8200 Measurement Setup



Test Instruments

<u>QTY</u>	<u>Description</u>
1	Tektronix DSA8200 Digital Serial Analyzer
2	Tektronix 80E04 Dual Channel 20 GHz TDR Sampling Module

Test Cables & Adapters

<u>QTY</u>	<u>Description</u>
2	Samtec RF405-01SP1-01SP1-0305 (DC-20 GHz)

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Appendix F - Frequency and Time Domain Measurements

Eye Diagram Procedures

Eye Diagrams and statistical eye diagram metrics such as eye height can be generated by post-processing Frequency Domain measurements using Agilent ADS. Simulated data is sent over a touchstone model and the bits are overlain into an eye pattern.

Currently, no CEI specification is available for 7Gbps, so *CEI-28-VSR Working Clause Proposal, CEI Implementation agreement Draft 7.0*, dated May 14, 2012 was used for this report.

The simulation circuit is modeled as:

Agilent's Advanced Design System Tx and Rx modules that are configured to the *CEI-28-VSR Working Clause Proposal, CEI Implementation agreement Draft 7.0*, dated May 14, 2012.

- Tx parameters are specified in Section 1.3.3, *Module-to-Host Specifications*, Table 1-4, Page 7.
- Rx parameters defined in Section 1.3.2 *Host-to-Module Electrical Specifications*, Table 1-1, Page 5.
- A 1.5 inch length of Tx interconnect trace segment at the transmitter.
- SUT Cable Assembly S-Parameter measurements
 - o 0.1 mils of 12 mil wide differential microstrip signal trace
 - o Test board vias, pads (footprint effects) for the QMSS-DP connector
 - o The QMSS-DP series connector
 - o The 6QDPS-016-XX.X-STR-TTL-2 cable assembly
 - o The QFSS-DP series connector
 - o Test board vias, pads (footprint effects) for the QFSS-DP connector
 - o 0.1 mils of 12 mil wide differential microstrip signal trace
- A 1.5 inch length of Rx interconnect trace segment at the receiver.

All traces were modeled as microstrip on FR4 with the following parameters:

- The FR4 parameters are modeled using:
 - o $\epsilon_r = 4.2 @ 1 \text{ GHz}$
 - o Loss Tangent = $0.02 @ 1 \text{ GHz}$
- Copper is modeled as:
 - o Conductivity = $4.5E+7 \text{ S-m}$
 - o Surface roughness = 0.6 micron
- Traces are microstrip with the following geometry:
 - o 12 mil trace width

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

- o 1.7 mil trace copper thickness
- o 7 mil FR4 dielectric thickness

Eye Mask

The eye mask is set for 50mVpp, with a jitter margin of 0.5 UI.

Rise Time

The 10-90 risetime of the 9Gbps signal was determined to be 78psec, using the following formula:

$$\text{Risetime} = 0.35/\text{Bandwidth}$$

Series: 6QDPS


Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Frequency (S-Parameter) Domain Procedures

The quality of any data taken with a network analyzer is directly related to the quality of the calibration standards and the use of proper test procedures. For this reason, extreme care is taken in the design of the AFR calibration standards, the SI test boards and the selection of the PCB vendor.

The measurement process begins with a measurement of the AFR calibration standards. A coaxial SOLT calibration is performed using an N4433A E-CAL module. This measurement is required in order to obtain precise values of the line standard offset delay and frequency bandwidths. Measurements of the 2x through line standard can be used to determine the maximum frequency for which the calibration standards are valid. For the 6QDPS test boards, this is greater than 20 GHz.

The figure below shows how the THRU reference traces are utilized to compensate for the losses due to the coaxial test cables and the test fixture during testing. The calibration board is characterized to obtain parameters required to define the 2x Thru.

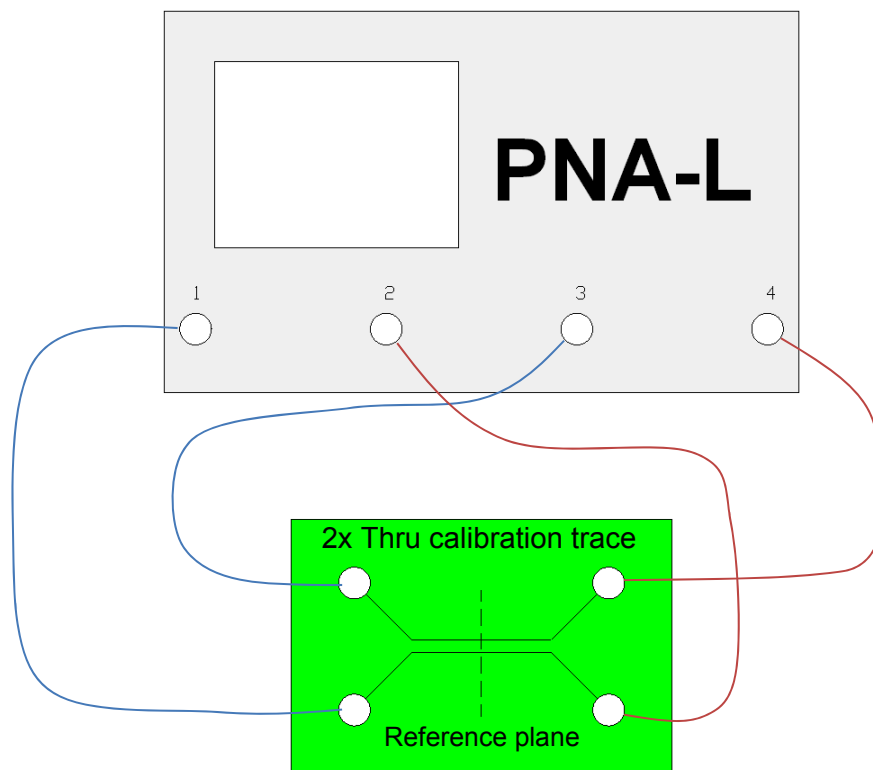


Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Measurements are then performed using the test boards as shown below. The test board effects are removed in post-processing via AFR in Agilent PLTS. The calibrated reference plane is located 0.1 mils from the connector footprint on each side. The S-Parameter measurements include:

- A. 0.1 mils of 12 mil wide differential microstrip signal trace
- B. Test board vias, pads (footprint effects) for the QMSS-DP connector
- C. The QMSS-DP series connector
- D. The 6QDPS-016-XX.X-STR-TTL-2 test cable
- E. The QFSS-DP series connector
- F. Test board vias, pads (footprint effects) for the QFSS-DP connector
- G. 0.1 mils of 12 mil wide differential microstrip signal trace

The figure below shows the location of the measurement reference plane.

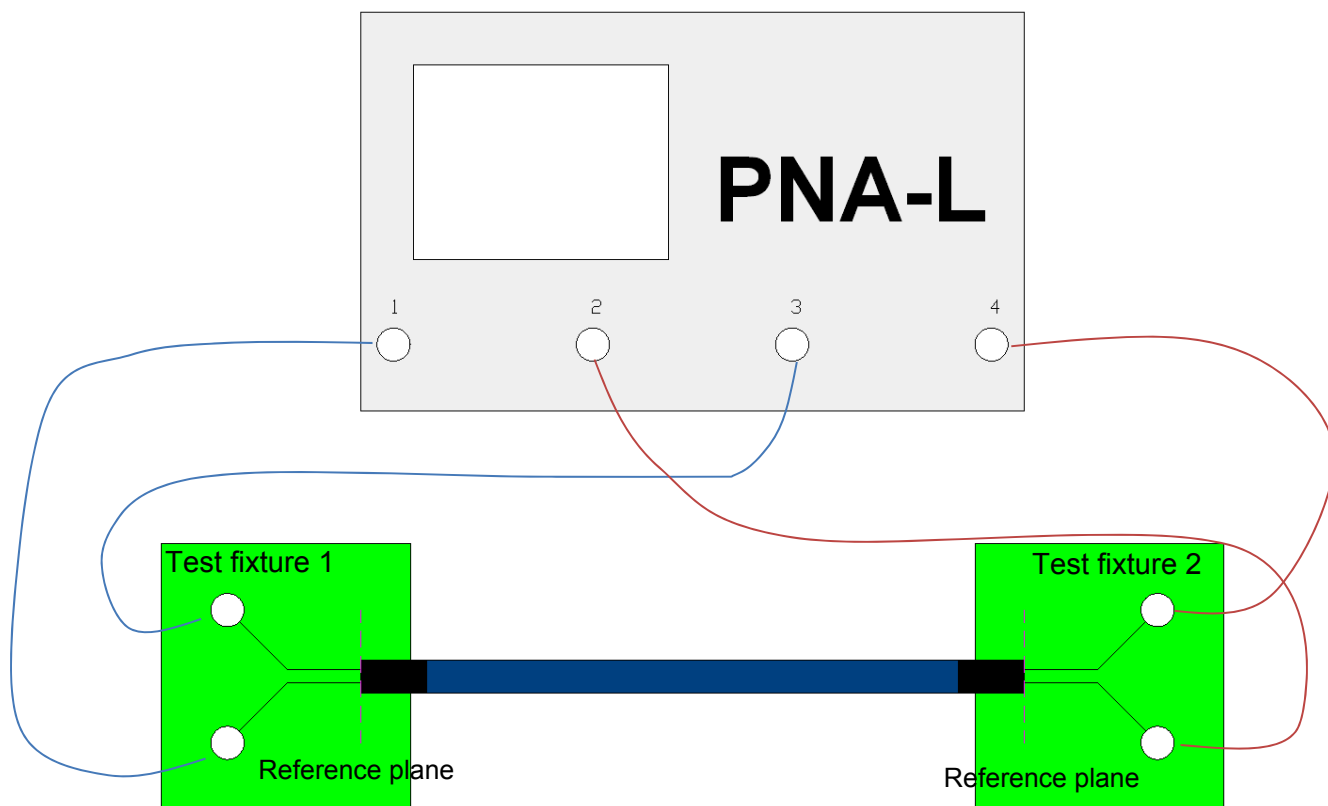

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Time Domain Procedures

Mathematically, Frequency Domain data can be transformed to obtain a Time Domain response. Perfect transformation requires Frequency Domain data from DC to infinity Hz. Fortunately, a very accurate Time Domain response can be obtained with bandwidth-limited data, such as measured with modern network analyzer.

The Time Domain responses were generated using Agilent ADS 2011 update 10. This tool has a transient convolution simulator, which can generate a Time Domain response directly from measured S-Parameters. An example of a similar methodology is provided in the Samtec Technical Note on domain transformation.

http://www.samtec.com/Documents/WebFiles/Technical_Library/Reference/Articles/tech-note_using-PLTS-for-time-domain-data_web.pdf

Propagation Delay (TDT)

The Propagation Delay is a measure of the Time Domain delay through the cable assembly and footprint. A step pulse is applied to the touchstone model of the cable assembly and the transmitted voltage is monitored. The same pulse is also applied to a reference channel with zero loss, and the Time Domain pulses are plotted on the same graph. The difference in time, measured at the 50% point of the step voltage is the propagation delay.

Impedance (TDR)

Measurements involving digital pulses are performed using either Time Domain Reflectometer (TDR) or Time Domain Transmission (TDT) methods. The TDR method is used for the impedance measurements in this report.

The signal line(s) of the SUT's is energized with a TDR pulse and the far-end of the energized signal line is terminated in the test systems characteristic impedance (e.g.; 50Ω or 100Ω terminations). By terminating the adjacent signal lines in the test systems characteristic impedance, the effects on the resultant impedance shape of the waveform is limited. The "best case" signal mapping was tested and is presented in this report.

Series: 6QDPS

Description: Cable Assembly, 0.635 mm Q2™ Shielded High Speed Twinax Cable

Appendix G – Glossary of Terms

ADS – Agilent Advanced Design System

AFR – Automatic Fixture Removal

CTLE – Continuous Time Linear Analyzer

CuFireFly™ - Copper FireFly™ assembly

DUT – Device under test

FD – Frequency domain

FEXT – Far-End Crosstalk

HDV – High Density Vertical

NEXT – Near-End Crosstalk

OV – Optimal Vertical

OH – Optimal Horizontal

PCB – Printed Circuit Board

PLTS – Agilent Physical Layer Design System

PPO – Pin Population Option

SE – Single-Ended

SI – Signal Integrity

SUT – System Under Test

S – Static (independent of PCB ground)

SOLT – acronym used to define Short, Open, Load & Thru Calibration Standards

TD – Time Domain

TDA – Time Domain Analysis

TDR – Time Domain Reflectometry

TDT – Time Domain Transmission

UI – Unit Interval

XROW – Across Row

Z – Impedance (expressed in ohms)