




High Speed Characterization Report

SEAMP-XX-02.0-L-XX

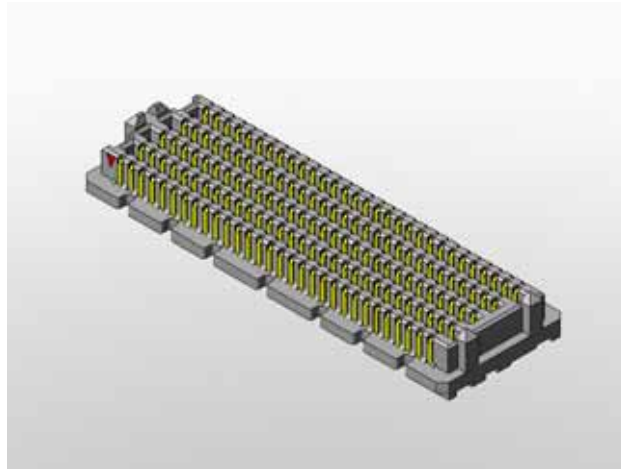

Mates with

SEAF-XX-01-S-XX-1-RA



Description:
Open Pin Field Array, 1.27mm x 1.27mm Pitch
Vertical (Press-Fit) to Right Angle

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table of Contents

Connector Overview	1
Connector System Speed Rating	1
Frequency Domain Data Summary	3
Table 1 - Single-Ended 1:1 S/G Pattern Performance	3
Table 2 - Single-Ended 2:1 S/G Pattern Performance	5
Table 3 - Differential Optimal Horizontal Performance	7
Table 4 - Differential Optimal Vertical Performance	9
Table 5 - Differential High Density Vertical Performance	11
Bandwidth Charts – Single-Ended & Differential Insertion Loss	13
Time Domain Data Summary	16
Table 6 – Single-End Impedance (Ω) – 1:1 S/G Pattern	16
Table 7 – Single-End Impedance (Ω) – 2:1 S/G Pattern	18
Table 8 – Differential Impedance (Ω) – Optimal Horizontal	20
Table 9 – Differential Impedance (Ω) – Optimal Vertical	22
Table 10 – Differential Impedance (Ω) – High Density Vertical	24
Table 11 - Single-Ended Crosstalk (%) – 1:1 S/G Pattern	26
Table 12 - Single-Ended Crosstalk (%) – 2:1 S/G Pattern	27
Table 13 - Differential Crosstalk (%) – Optimal Horizontal	28
Table 14 - Differential Crosstalk (%) – Optimal Vertical	29
Table 15 - Differential Crosstalk (%) – High Density Vertical	30
Table 16 - Propagation Delay (Mated Connector)	31
Characterization Details	33
Differential and Single-Ended Data	33
Connector Signal to Ground Ratio	33
Frequency Domain Data	39
Time Domain Data	40
Appendix A – Frequency Domain Response Graphs	41
Single-Ended 1:1 S/G Pattern Application – Insertion Loss	41
Single-Ended 1:1 S/G Pattern Application – Return Loss	41
Single-Ended 1:1 S/G Pattern Application – NEXT	42
Single-Ended 1:1 S/G Pattern Application – FEXT	42
Single-Ended 2:1 S/G Pattern Application – Insertion Loss	43
Single-Ended 2:1 S/G Pattern Application – Return Loss	43
Single-Ended 2:1 S/G Pattern Application – NEXT	44
Single-Ended 2:1 S/G Pattern Application – FEXT	44
Differential Optimal Horizontal Application – Insertion Loss	45
Differential Optimal Horizontal Application – Return Loss	45
Differential Optimal Horizontal Application – NEXT	46

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Horizontal Application – FEXT.....	46
Differential Optimal Vertical Application – Insertion Loss.....	47
Differential Optimal Vertical Application – Return Loss.....	47
Differential Optimal Vertical Application – NEXT	48
Differential Optimal Vertical Application – FEXT.....	48
Differential High Density Vertical Application – Insertion Loss.....	49
Differential High Density Vertical Application – Return Loss.....	49
Differential High Density Vertical Application – NEXT	50
Differential High Density Vertical Application – FEXT	50
Appendix B – Time Domain Response Graphs.....	51
Single-Ended Application – Input Pulse.....	51
Single-Ended 1:1 S/G Pattern Application – Impedance	51
Single-Ended 1:1 S/G Pattern Application – Propagation Delay.....	54
Single-Ended 2:1 S/G Pattern Application – Impedance	57
Single-Ended 2:1 S/G Pattern Application – Propagation Delay.....	60
Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_161_SEAMP_163.....	63
Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_161_SEAF-RA_163.....	63
Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_163_SEAMP_183.....	64
Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_163_SEAF-RA_183.....	64
Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_124_SEAMP_126.....	65
Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_124_SEAF-RA_126.....	65
Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_78_SEAMP_98.....	66
Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_78_SEAF-RA_98.....	66
Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_78_SEAMP_80.....	67
Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_78_SEAF-RA_80.....	67
Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_151_SEAMP_161.....	68
Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_151_SEAF-RA_161.....	68
Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_184_SEAMP_194.....	69
Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_184_SEAF-RA_194.....	69
Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_155_SEAMP_156.....	70
Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_155_SEAF-RA_156.....	70
Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_78_SEAMP_88.....	71
Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_78_SEAF-RA_88.....	71
Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_78_SEAMP_80.....	72
Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_78_SEAF-RA_80.....	72
Differential Application – Input Pulse	73
Differential Optimal Horizontal Application – Impedance	73
Differential Optimal Horizontal Application – Propagation Delay	76
Differential Optimal Vertical Application – Impedance	79
Differential Optimal Vertical Application – Propagation Delay	82
Differential High Density Vertical Application – Impedance	85

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential High Density Vertical Application – Propagation Delay.....	88
Diff Optimal Horizontal Application – NEXT, SEAMP_61,71_SEAMP_63,73	91
Diff Optimal Horizontal Application – FEXT, SEAMP_61,71_SEAF-RA_63,73	91
Diff Optimal Horizontal Application – NEXT, SEAMP_63,73_SEAMP_84,94	92
Diff Optimal Horizontal Application – FEXT, SEAMP_63,73_SEAF-RA_84,94	92
Diff Optimal Horizontal Application – NEXT, SEAMP_106,116_SEAMP_146,156	93
Diff Optimal Horizontal Application – FEXT, SEAMP_106,116_SEAF-RA_146,156	93
Diff Optimal Horizontal Application – NEXT, SEAMP_106,116_SEAMP_127,137	94
Diff Optimal Horizontal Application – FEXT, SEAMP_106,116_SEAF-RA_127,137	94
Diff Optimal Horizontal Application – NEXT, SEAMP_127,137_SEAMP_148,158	95
Diff Optimal Horizontal Application – FEXT, SEAMP_127,137_SEAF-RA_148,158 ...	95
Diff Optimal Horizontal Application – NEXT, SEAMP_208,218_SEAMP_210,220	96
Diff Optimal Horizontal Application – FEXT, SEAMP_208,218_SEAF-RA_210,220 ...	96
Diff Optimal Vertical Application – NEXT, SEAMP_145,146_SEAMP_165,166	97
Diff Optimal Vertical Application – FEXT, SEAMP_145,146_SEAF-RA_165,166	97
Diff Optimal Vertical Application – NEXT, SEAMP_145,146_SEAMP_157,158	98
Diff Optimal Vertical Application – FEXT, SEAMP_145,146_SEAF-RA_157,158	98
Diff Optimal Vertical Application – NEXT, SEAMP_165,166_SEAMP_169,170	99
Diff Optimal Vertical Application – FEXT, SEAMP_165,166_SEAF-RA_169,170	99
Diff Optimal Vertical Application – NEXT, SEAMP_217,218_SEAMP_229,230	100
Diff Optimal Vertical Application – FEXT, SEAMP_217,218_SEAF-RA_229,230	100
Diff HDV Application – NEXT, SEAMP_121,122_SEAMP_132,133	101
Diff HDV Application – FEXT, SEAMP_121,122_SEAF-RA_132,133	101
Diff HDV Application – NEXT, SEAMP_134,135_SEAMP_154,155	102
Diff HDV Application – FEXT, SEAMP_134,135_SEAF-RA_154,155	102
Diff HDV Application – NEXT, SEAMP_134,135_SEAMP_145,146	103
Diff HDV Application – FEXT, SEAMP_134,135_SEAF-RA_145,146	103
Diff HDV Application – NEXT, SEAMP_154,155_SEAMP_157,158	104
Diff HDV Application – FEXT, SEAMP_154,155_SEAF-RA_157,158	104
Diff HDV Application – NEXT, SEAMP_218,219_SEAMP_229,230	105
Diff HDV Application – FEXT, SEAMP_218,219_SEAF-RA_229,230	105
Appendix C – Product and Test System Descriptions	106
Product Description	106
Test System Description	106
PCB-103845-TST-XX Test Fixtures.....	106
PCB-103845-TST-XX PCB Layout Panel	107
PCB Fixtures	108
Calibration Board	113
Appendix D – Test and Measurement Setup.....	115
N5230C Measurement Setup	115
Test Instruments	116



Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Test Cables & Adapters 116

Appendix E - Frequency and Time Domain Measurements 117

 Frequency (S-Parameter) Domain Procedures 117

 Time Domain Procedures 117

 Impedance (TDR)..... 117

 Propagation Delay (TDT) 118

 Near-End Crosstalk (TDT) & Far End Crosstalk (TDT) 118

Appendix F – Glossary of Terms 119

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Connector Overview

SEAMP/SEAF-RA series is a 1.27mm x 1.27mm pitch interconnects system for elevated high-speed board-to-board applications. The SEAMP/SEAF-RA Series is available in 4, 6, 8, and 10 row open pin field arrays. Pins per row selections are 10, 20, 30, 40, or 50. This report reflects only the hi-speed electrical characteristics specific to a mated 10 to 50 contacts/row, 10 rows, SEAMP/SEAF-RA test system.

Connector System Speed Rating

SEAMP/ SEAF-RA Series, 1.27mm x 1.27mm (.050" x .050") pitch interconnect	
<u>Signaling</u>	<u>Speed Rating</u>
Single-Ended: 1:1 S/G, row1	6 GHz/ 12Gbps
Single-Ended: 1:1 S/G, row4	8.5 GHz/ 17Gbps
Single-Ended: 1:1 S/G, row6	7 GHz/ 14Gbps
Single-Ended: 1:1 S/G, row8	6 GHz/ 12Gbps
Single-Ended: 1:1 S/G, row10	6 GHz/ 12Gbps
Single-Ended: 2:1 S/G, row1	6 GHz/ 12Gbps
Single-Ended: 2:1 S/G, row4	11 GHz/ 22Gbps
Single-Ended: 2:1 S/G, row6	9.5 GHz/ 19Gbps
Single-Ended: 2:1 S/G, row8	6 GHz/ 12Gbps
Single-Ended: 2:1 S/G, row10	8.5 GHz/ 17Gbps
Differential: Optimal Horizontal, row1	11 GHz/ 22Gbps
Differential: Optimal Horizontal, row4	8.5 GHz/ 17Gbps
Differential: Optimal Horizontal, row7	6.5 GHz/ 13Gbps
Differential: Optimal Horizontal, row8	6 GHz/ 12Gbps
Differential: Optimal Horizontal, row10	6 GHz/ 12Gbps

Series: SEAMP/SEAF-RA**Description:** 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential: Optimal Vertical, row1,2	9 GHz/ 18Gbps
Differential: Optimal Vertical, row3,4	8.5 GHz/ 17Gbps
Differential: Optimal Vertical, row5,6	8.5 GHz/ 17Gbps
Differential: Optimal Vertical, row7,8	8.5 GHz/ 17Gbps
Differential: Optimal Vertical, row9,10	9 GHz/ 18Gbps
Differential: High Density Vertical, row1,2	7.5 GHz/ 15Gbps
Differential: High Density Vertical, row4,5	7.5 GHz/ 15Gbps
Differential: High Density Vertical, row7,8	8.5 GHz/ 17Gbps
Differential: High Density Vertical, row8,9	8 GHz/ 16Gbps
Differential: High Density Vertical, row9,10	9.5 GHz/ 19Gbps

The Speed Rating is based on the -3 dB insertion loss point of the connector system. The -3 dB point can be used to estimate usable system bandwidth in a typical, two-level signaling environment.

To calculate the Speed Rating, the measured -3 dB point is rounded up to the nearest half-GHz level. The up-rounding corrects for a portion of the test board's trace loss, since a short length of trace loss is included in the loss data in this report. The resulting loss value is then doubled to determine the approximate maximum data rate in Gigabits per second (Gbps).

For example, a connector with a -3 dB point of 7.8 GHz would have a Speed Rating of 8 GHz/ 16 Gbps. A connector with a -3 dB point of 7.2 GHz would have a Speed Rating of 7.5 GHz/15 Gbps.

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Frequency Domain Data Summary

Table 1 - Single-Ended 1:1 S/G Pattern Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAMP_161	SEAF-RA_161	3dB@ 6.0 GHz
	SEAMP_124	SEAF-RA_124	3dB@ 8.2 GHz
	SEAMP_126	SEAF-RA_126	3dB@ 6.6 GHz
	SEAMP_98	SEAF-RA_98	3dB@ 5.6 GHz
	SEAMP_80	SEAF-RA_80	3dB@ 5.7 GHz
Return Loss	SEAMP_161	SEAMP_161	>10dB to 3.8 GHz
	SEAMP_124	SEAMP_124	>10dB to 4.1 GHz
	SEAMP_126	SEAMP_126	>10dB to 3.3 GHz
	SEAMP_98	SEAMP_98	>10dB to 5.6 GHz
	SEAMP_80	SEAMP_80	>10dB to 3.8 GHz
Near-End Crosstalk	SEAMP_161	SEAMP_163	<-20dB to 20.0 GHz
	SEAMP_163	SEAMP_183	<-20dB to 20.0 GHz
	SEAMP_124	SEAMP_126	<-20dB to 20.0 GHz
	SEAMP_78	SEAMP_98	<-20dB to 20.0 GHz
	SEAMP_78	SEAMP_80	<-20dB to 5.6 GHz
Far-End Crosstalk	SEAMP_161	SEAF-RA_163	<-20dB to 20.0 GHz
	SEAMP_163	SEAF-RA_183	<-20dB to 20.0 GHz
	SEAMP_124	SEAF-RA_126	<-20dB to 8.3 GHz
	SEAMP_78	SEAF-RA_98	<-20dB to 14.1GHz
	SEAMP_78	SEAF-RA_80	<-20dB to 5.5 GHz

Series: SEAMP/SEAF-RA


Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 2 - Single-Ended 2:1 S/G Pattern Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAMP_151	SEAF-RA_151	3dB@ 5.9 GHz
	SEAMP_194	SEAF-RA_194	3dB@ 10.9 GHz
	SEAMP_166	SEAF-RA_166	3dB@ 9.3 GHz
	SEAMP_78	SEAF-RA_78	3dB@ 5.6 GHz
	SEAMP_70	SEAF-RA_70	3dB@ 8.1 GHz
Return Loss	SEAMP_151	SEAMP_151	>10dB to 3.8 GHz
	SEAMP_194	SEAMP_194	>10dB to 3.8 GHz
	SEAMP_166	SEAMP_166	>10dB to 5.5 GHz
	SEAMP_78	SEAMP_78	>10dB to 5.6 GHz
	SEAMP_70	SEAMP_70	>10dB to 3.8 GHz
Near-End Crosstalk	SEAMP_151	SEAMP_161	<-20dB to 0.7 GHz
	SEAMP_184	SEAMP_194	<-20dB to 0.6 GHz
	SEAMP_155	SEAMP_156	<-20dB to 0.7 GHz
	SEAMP_78	SEAMP_88	<-20dB to 0.5 GHz
	SEAMP_78	SEAMP_80	<-20dB to 5.6 GHz
Far-End Crosstalk	SEAMP_151	SEAF-RA_161	<-20dB to 5.7 GHz
	SEAMP_184	SEAF-RA_194	<-20dB to 7.9 GHz
	SEAMP_155	SEAF-RA_156	<-20dB to 3.3 GHz
	SEAMP_78	SEAF-RA_88	<-20dB to 5.5 GHz
	SEAMP_78	SEAF-RA_80	<-20dB to 2.8 GHz


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


Single-Ended 2:1 S/G Pattern Pin Map

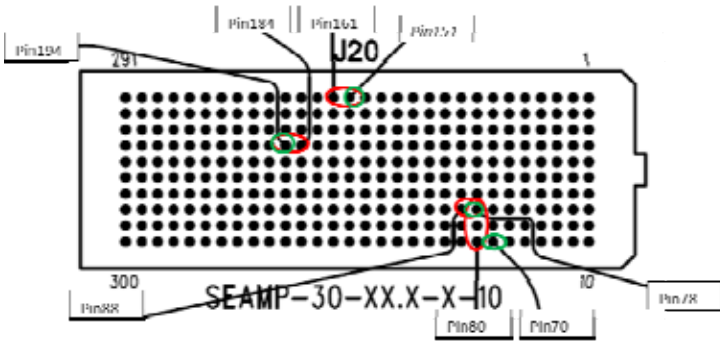


SEAMP

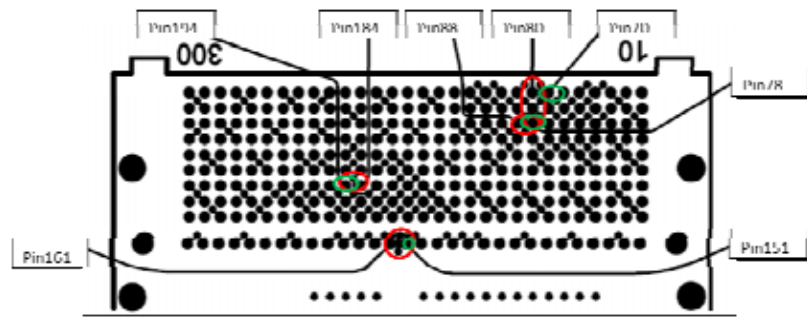

SEAF_RA

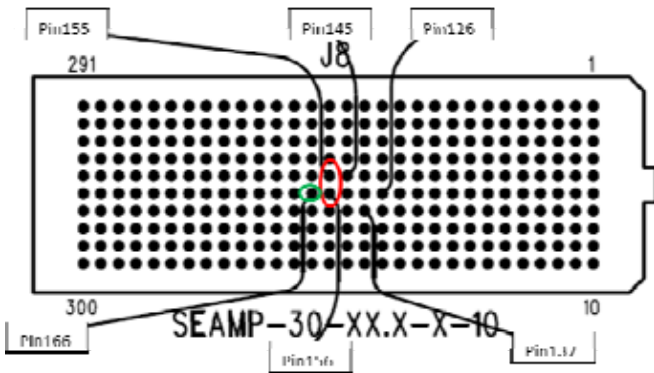

SEAMP

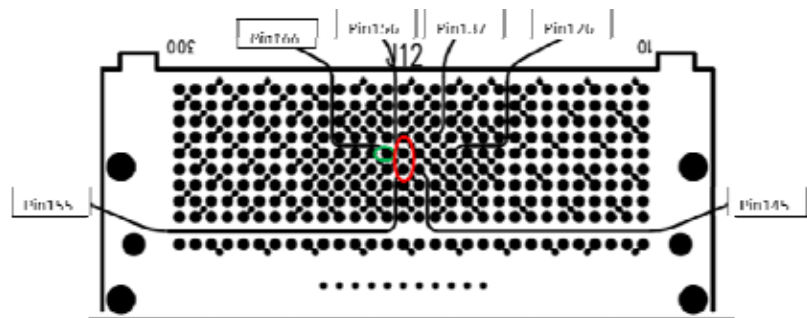

SEAF_RA

- Insertion Loss & Return Loss
- Crosstalk

Series: SEAMP/SEAF-RA


Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 3 - Differential Optimal Horizontal Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAMP_61,71	SEAF-RA_61,71	3dB@ 10.9 GHz
	SEAMP_84,94	SEAF-RA_84,94	3dB@ 8.2 GHz
	SEAMP_127,137	SEAF-RA_127,137	3dB@ 6.1 GHz
	SEAMP_148,158	SEAF-RA_148,158	3dB@ 5.7 GHz
	SEAMP_210, 220	SEAF-RA_210,220	3dB@ 5.7 GHz
Return Loss	SEAMP_61,71	SEAMP_61,71	>10dB to 6.1 GHz
	SEAMP_84,94	SEAMP_84,94	>10dB to 5.2 GHz
	SEAMP_127,137	SEAMP_127,137	>10dB to 5.1 GHz
	SEAMP_148,158	SEAMP_148,158	>10dB to 5.0 GHz
	SEAMP_210, 220	SEAMP_210, 220	>10dB to 5.6 GHz
Near-End Crosstalk	SEAMP_61,71	SEAMP_63,73	<-20dB to 20 GHz
	SEAMP_63,73	SEAMP_84,94	<-20dB to 20 GHz
	SEAMP_106,116	SEAMP_146,156	<-20dB to 20 GHz
	SEAMP_106,116	SEAMP_127,137	<-20dB to 20 GHz
	SEAMP_127, 137	SEAMP_148, 158	<-20dB to 20 GHz
	SEAMP_208, 218	SEAMP_210, 220	<-20dB to 5.7 GHz
Far-End Crosstalk	SEAMP_61,71	SEAF-RA_63, 73	<-20dB to 20 GHz
	SEAMP_63,73	SEAF-RA_84,94	<-20dB to 20 GHz
	SEAMP_106,116	SEAF-RA_146,156	<-20dB to 20 GHz
	SEAMP_106,116	SEAF-RA_127,137	<-20dB to 20 GHz
	SEAMP_127, 137	SEAF-RA_148,158	<-20dB to 20 GHz
	SEAMP_208, 218	SEAF-RA_210,220	<-20dB to 5.6 GHz


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


Differential Optimal Horizontal Pin Map

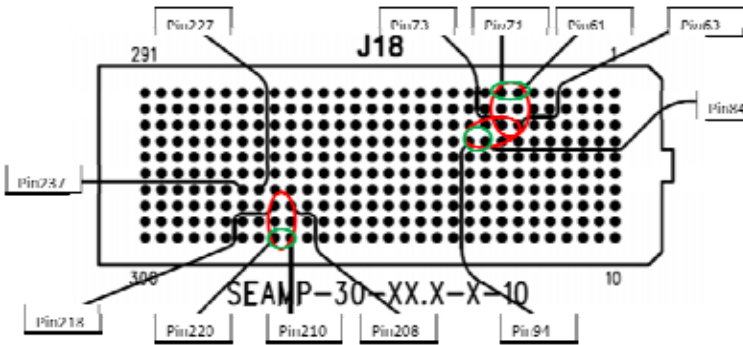


SEAMP

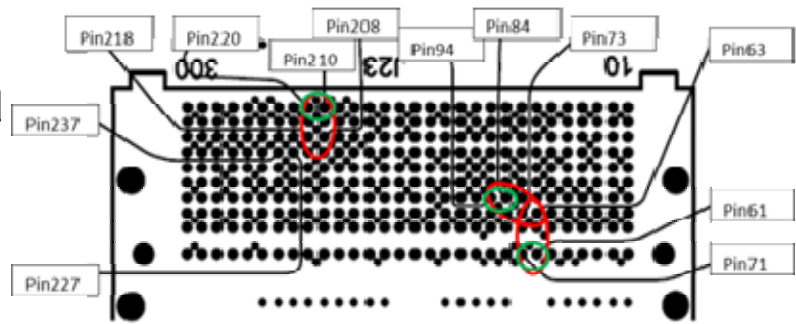

SEAF_RA

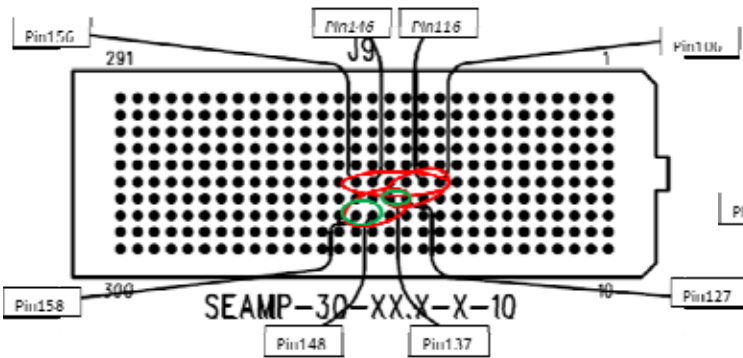

SEAMP

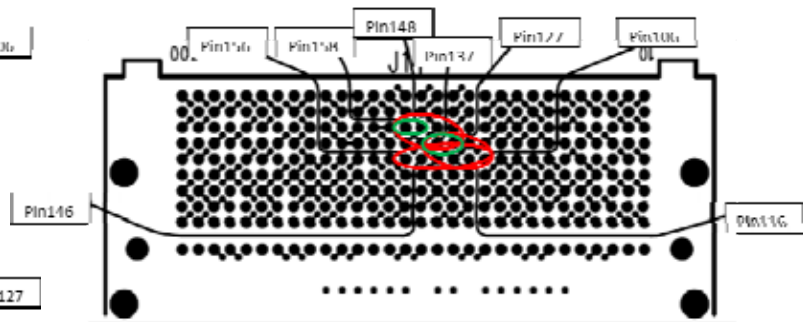

SEAF_RA

- Insertion Loss & Return Loss
- Crosstalk

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 4 - Differential Optimal Vertical Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAMP_81,82	SEAF-RA_81,82	3dB@ 8.5 GHz
	SEAMP_93,94	SEAF-RA_93,94	3dB@ 8.3 GHz
	SEAMP_165,166	SEAF-RA_165,166	3dB@ 8.3 GHz
	SEAMP_157,158	SEAF-RA_157,158	3dB@ 8.3 GHz
	SEAMP_229, 230	SEAF-RA_229,230	3dB@ 9.0 GHz
Return Loss	SEAMP_81,82	SEAMP_81,82	>10dB to 5.6 GHz
	SEAMP_93,94	SEAMP_93,94	>10dB to 5.0 GHz
	SEAMP_165,166	SEAMP_165,166	>10dB to 4.8 GHz
	SEAMP_157,158	SEAMP_157,158	>10dB to 5.6 GHz
	SEAMP_229, 230	SEAMP_229, 230	>10dB to 6.3 GHz
Near-End Crosstalk	SEAMP_145, 146	SEAMP_165, 166	<-20dB to 20 GHz
	SEAMP_145, 146	SEAMP_157, 158	<-20dB to 20 GHz
	SEAMP_165,166	SEAMP_169, 170	<-20dB to 20 GHz
	SEAMP_217,218	SEAMP_229, 230	<-20dB to 20 GHz
Far-End Crosstalk	SEAMP_145, 146	SEAF-RA_165, 166	<-20dB to 20 GHz
	SEAMP_145, 146	SEAF-RA_157, 158	<-20dB to 20 GHz
	SEAMP_165,166	SEAF-RA_169, 170	<-20dB to 20 GHz
	SEAMP_217,218	SEAF-RA_229, 230	<-20dB to 20 GHz

Series: SEAMP/SEAF-RA


Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 5 - Differential High Density Vertical Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAMP_121,122	SEAF-RA_121,122	3dB@ 7.2 GHz
	SEAMP_134,135	SEAF-RA_134,135	3dB@ 7.2 GHz
	SEAMP_157,158	SEAF-RA_157,158	3dB@ 8.3 GHz
	SEAMP_218, 219	SEAF-RA_218, 219	3dB@ 8.0 GHz
	SEAMP_229, 230	SEAF-RA_229,230	3dB@ 9.1 GHz
Return Loss	SEAMP_121,122	SEAMP_121,122	>10dB to 6.5 GHz
	SEAMP_134,135	SEAMP_134,135	>10dB to 6.8 GHz
	SEAMP_157,158	SEAMP_157,158	>10dB to 3.7 GHz
	SEAMP_218, 219	SEAMP_218, 219	>10dB to 6.6 GHz
	SEAMP_229, 230	SEAMP_229, 230	>10dB to 6.7 GHz
Near-End Crosstalk	SEAMP_121,122	SEAMP_132,133	<-20dB to 19.7 GHz
	SEAMP_134,135	SEAMP_154,155	<-20dB to 20 GHz
	SEAMP_134,135	SEAMP_145,146	<-20dB to 20 GHz
	SEAMP_154,155	SEAMP_157,158	<-20dB to 20 GHz
	SEAMP_218, 219	SEAMP_229, 230	<-20dB to 20 GHz
Far-End Crosstalk	SEAMP_121,122	SEAF-RA_132, 133	<-20dB to 18.2 GHz
	SEAMP_134,135	SEAF-RA_154,155	<-20dB to 20 GHz
	SEAMP_134,135	SEAF-RA_145,146	<-20dB to 14.2 GHz
	SEAMP_154,155	SEAF-RA_157,158	<-20dB to 20 GHz
	SEAMP_218, 219	SEAF-RA_229, 230	<-20dB to 20 GHz


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


Differential High Density Vertical Pin Map

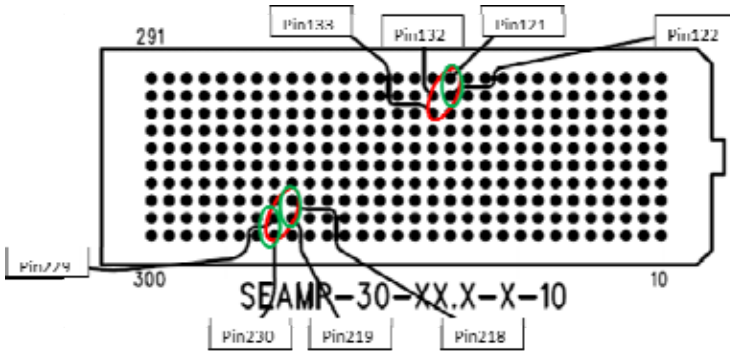


SEAMP

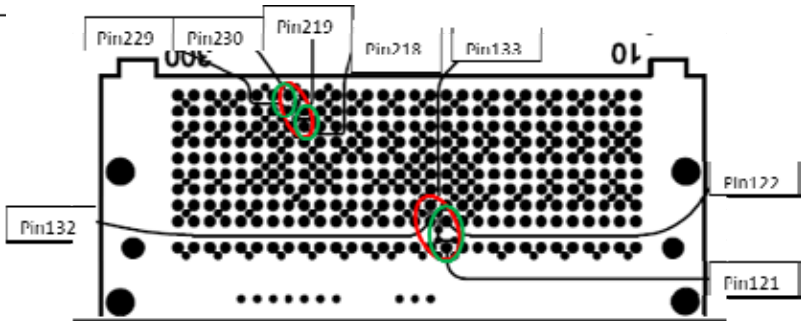

SEAF_RA

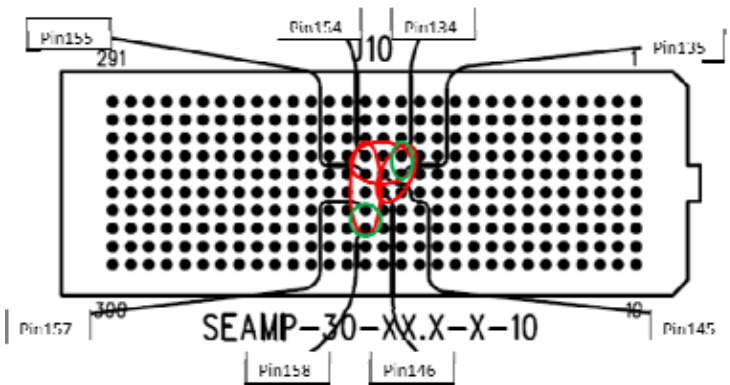

SEAMP

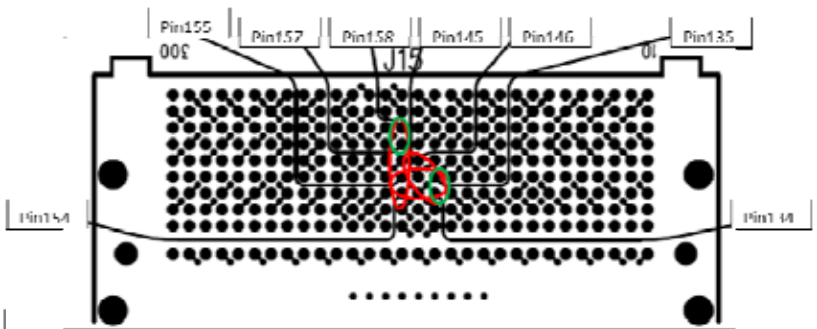

SEAF_RA

Insertion Loss & Return Loss

Crosstalk


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


Bandwidth Charts – Single-Ended & Differential Insertion Loss

SEAMP/SEAF-RA Array Series

Single-Ended 1:1 S/G Pattern

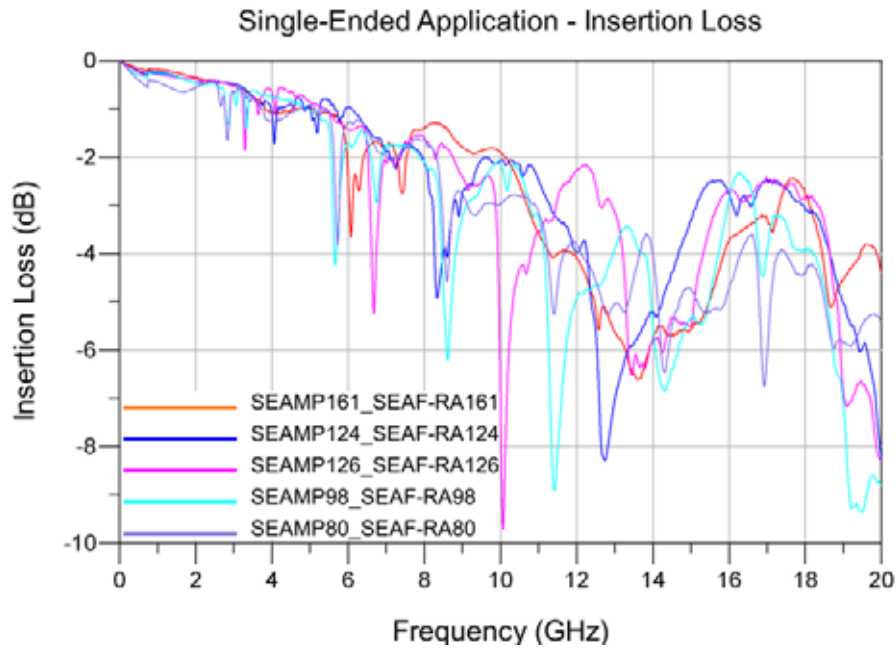


Single-Ended 2:1 S/G Pattern

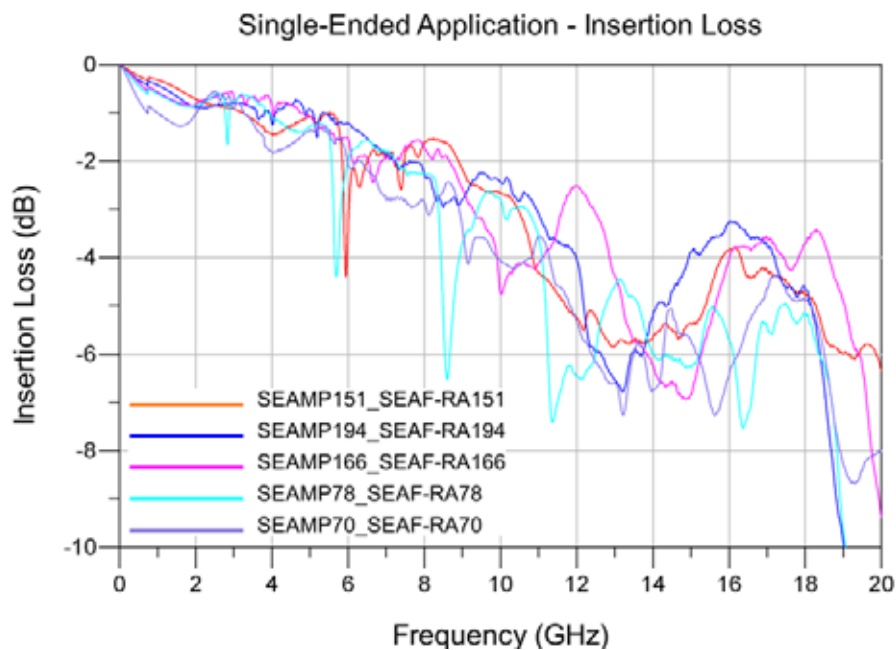


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Horizontal

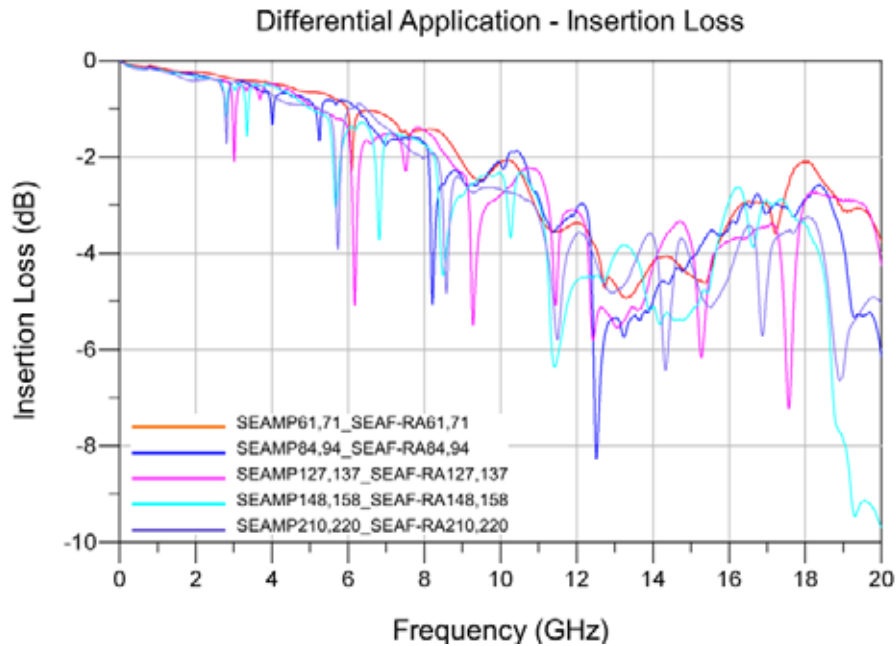


Differential Optimal Vertical

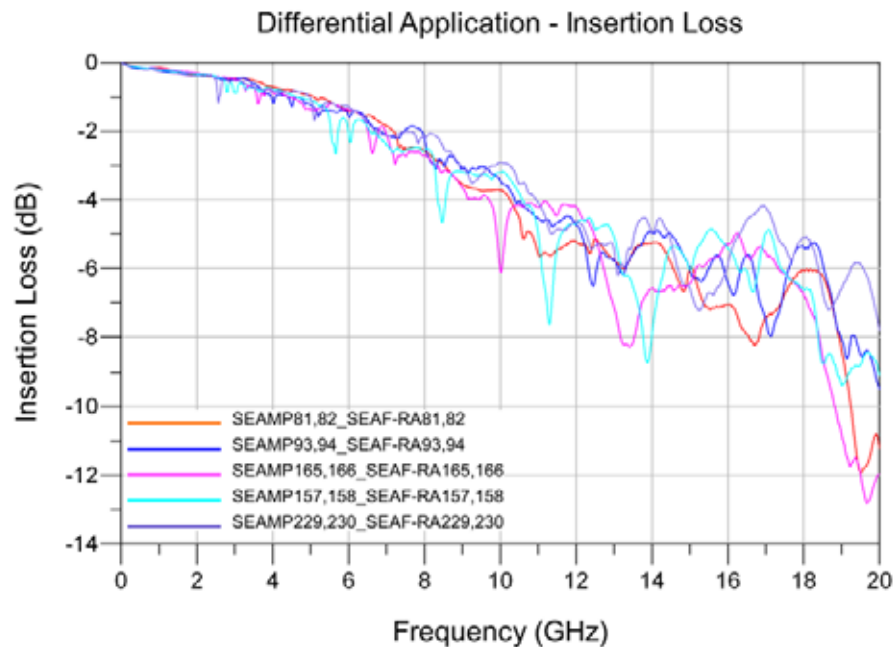

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential High Density Vertical

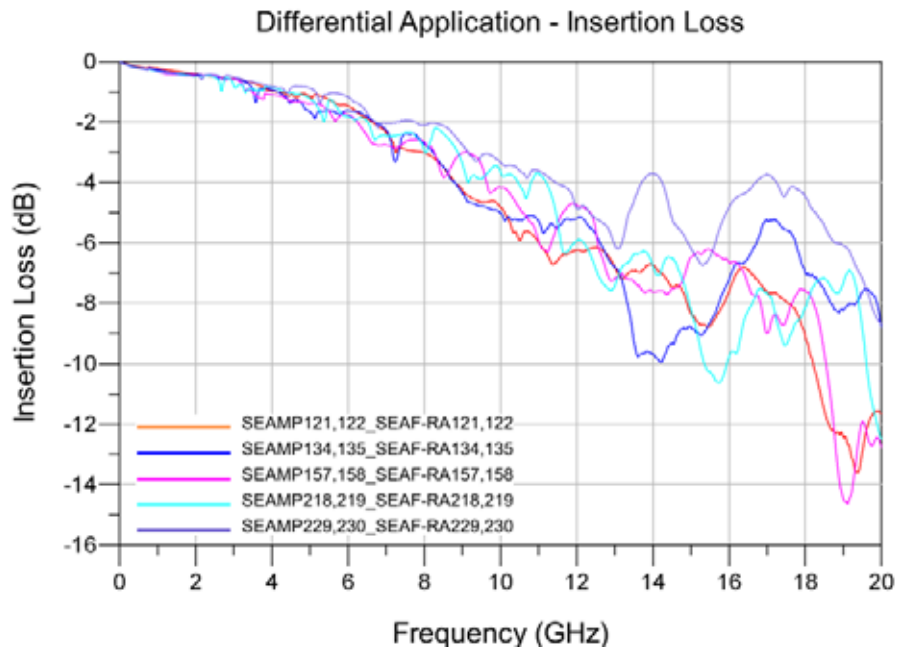

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


Time Domain Data Summary

Table 6 – Single-End Impedance (Ω) – 1:1 S/G Pattern						
Driver	Signal Risetime	30 ps	50 ps	100 ps	250 ps	500 ps
SEAMP 161	Maximum Impedance	72.6	67.7	61.6	55	55.8
	Minimum Impedance	41.1	43.9	48.5	49.9	50
SEAMP 124	Maximum Impedance	69.9	66.1	64.3	60.1	58.2
	Minimum Impedance	39.4	42.4	47.5	49.9	50
SEAMP 126	Maximum Impedance	67.6	66.3	65.3	61.9	59.6
	Minimum Impedance	38.2	41.2	46.4	49.7	50
SEAMP 98	Maximum Impedance	66.8	62	61.4	59.7	59.1
	Minimum Impedance	38.8	41.7	46.7	49.7	50
SEAMP 80	Maximum Impedance	74.7	72.3	70.7	67.3	63.9
	Minimum Impedance	41.1	44	48.5	49.9	50


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


SEAMP161

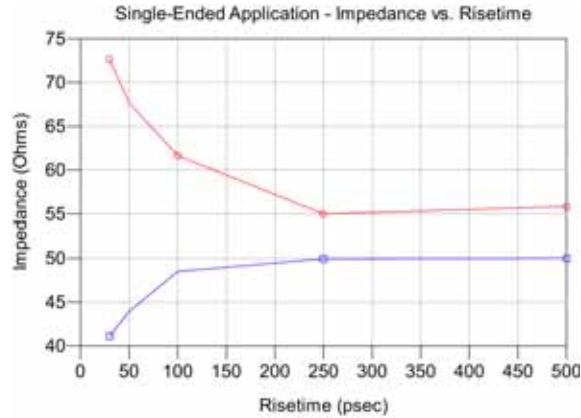


SEAMP124

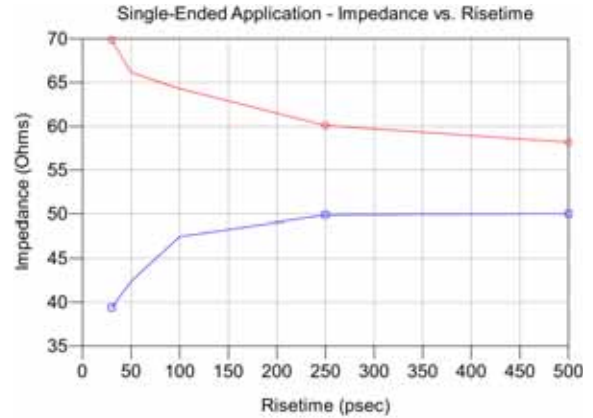


SEAMP126

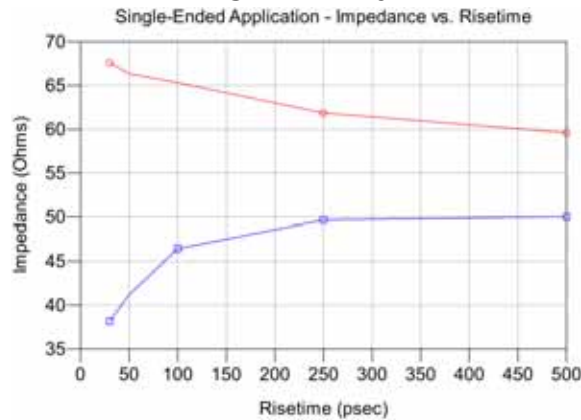

SEAMP98

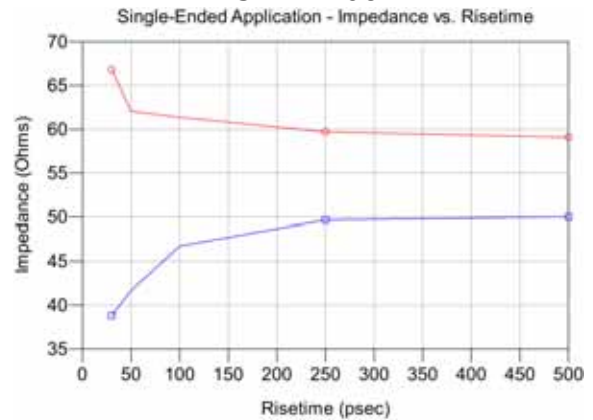

SEAMP80

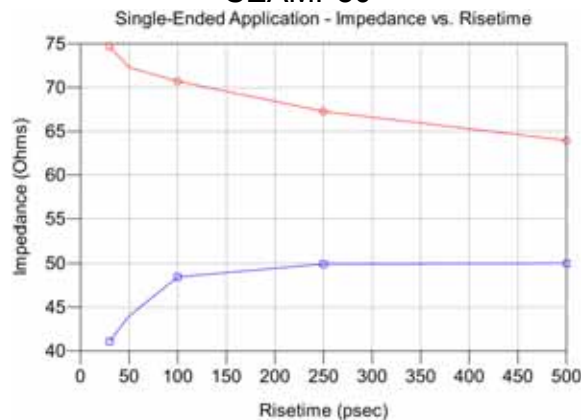






Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 7 – Single-End Impedance (Ω) – 2:1 S/G Pattern						
Driver	Signal Risetime	30 ps	50 ps	100 ps	250 ps	500 ps
SEAMP 151	Maximum Impedance	75	70.8	65.2	58.6	57.9
	Minimum Impedance	43.3	45.7	49.4	50	50
SEAMP 194	Maximum Impedance	67.1	64.3	63.4	59.2	58.5
	Minimum Impedance	41.2	43.9	47.9	49.9	50
SEAMP 166	Maximum Impedance	70.9	67.3	66	62.7	60.4
	Minimum Impedance	40.8	44	49.2	50	50
SEAMP 78	Maximum Impedance	71.5	68.1	66.8	64.3	61.9
	Minimum Impedance	42.2	45.3	49.7	50	50
SEAMP 70	Maximum Impedance	84.7	79.3	76.7	73.3	68.1
	Minimum Impedance	45.2	47.8	50	50	50

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

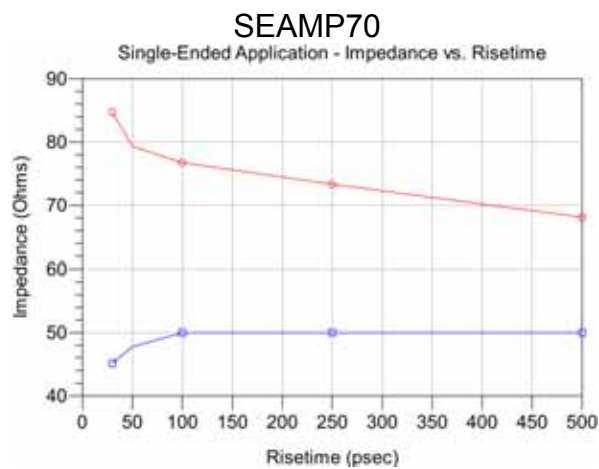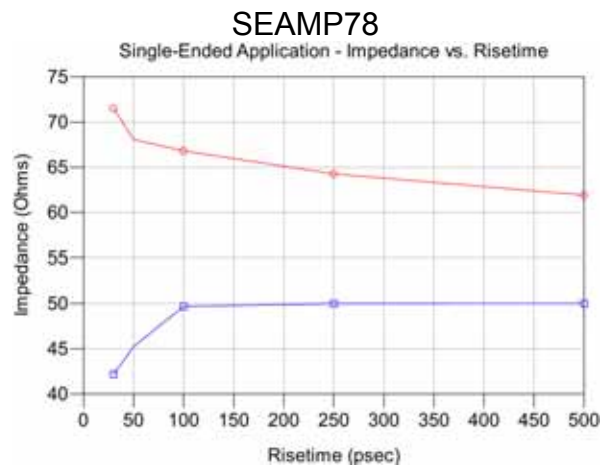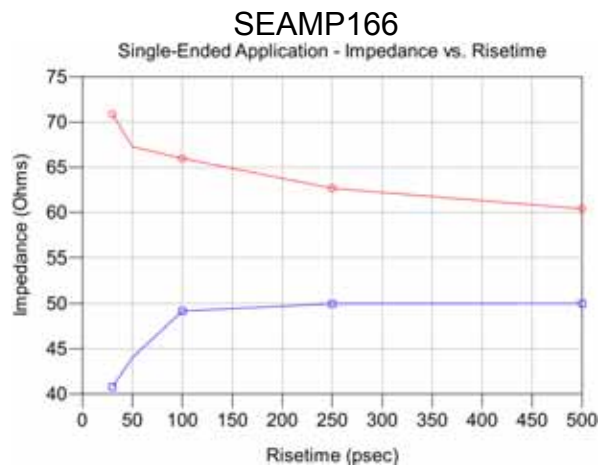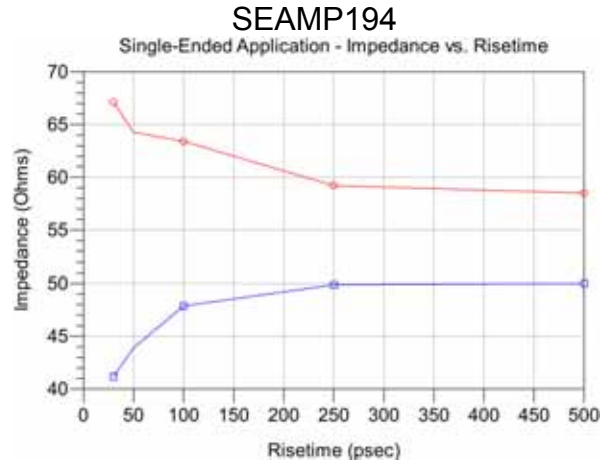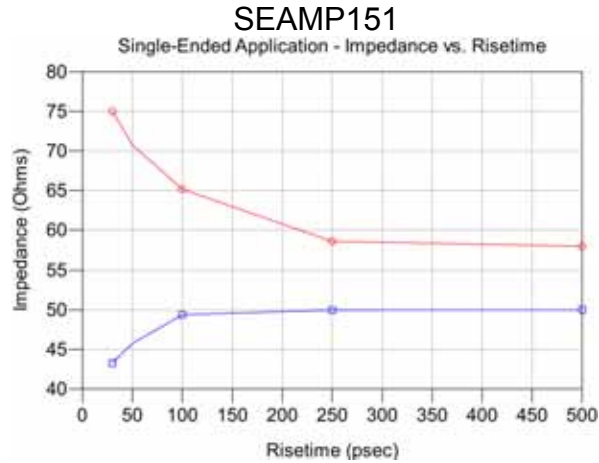






Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 8 – Differential Impedance (Ω) – Optimal Horizontal						
Driver	Signal Risetime	30 ps	50 ps	100 ps	250 ps	500 ps
SEAMP 61,71	Maximum Impedance	112.7	109.5	108.7	107	105.6
	Minimum Impedance	67.5	74.3	86.1	94.7	100
SEAMP 84,94	Maximum Impedance	112.6	111.5	110.8	109.5	108
	Minimum Impedance	64.4	71	83	92.8	100
SEAMP 127,137	Maximum Impedance	113.6	112.6	110.3	107.7	107.1
	Minimum Impedance	67.2	73.9	85.6	94.8	100
SEAMP 148,158	Maximum Impedance	115.8	114.4	112	108.4	107
	Minimum Impedance	68.5	75.4	87	95.7	98.9
SEAMP 210,220	Maximum Impedance	116.1	114	112.6	109.8	109.2
	Minimum Impedance	67.4	74	86.2	95	100

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

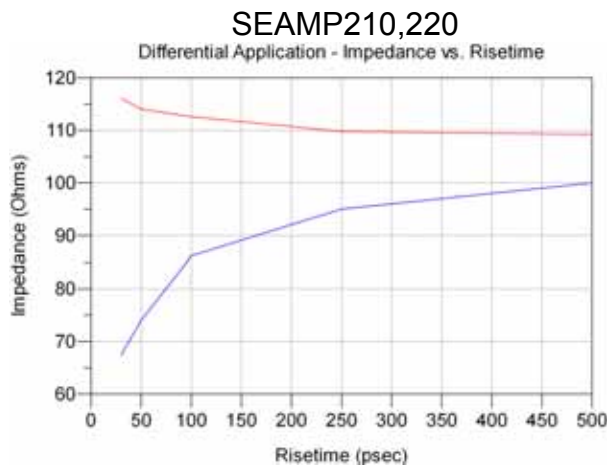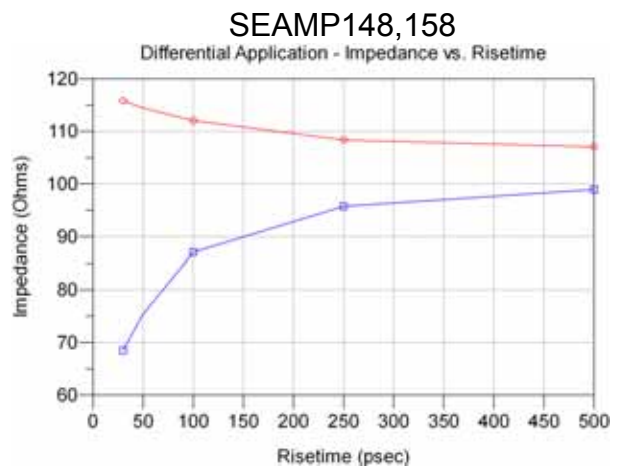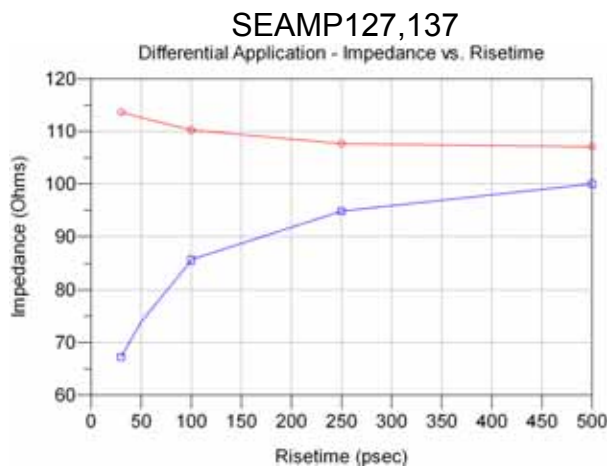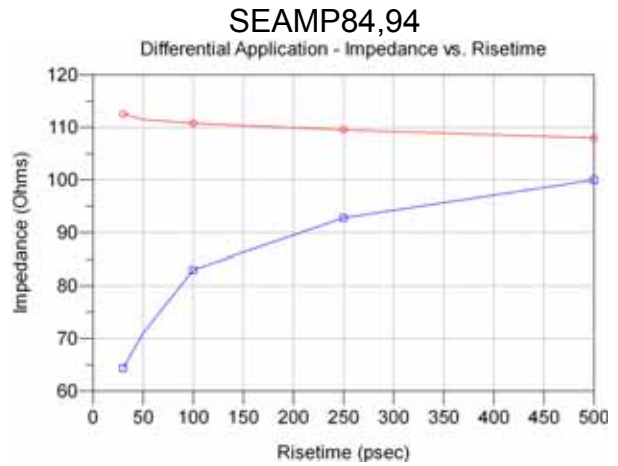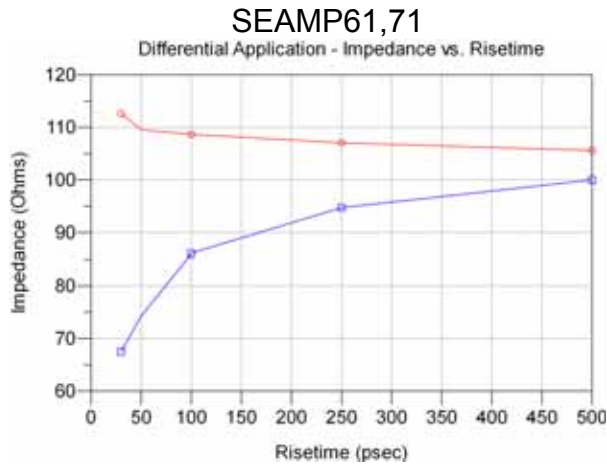

Series: SEAMP/SEAF-RA


Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 9 – Differential Impedance (Ω) – Optimal Vertical						
Driver	Signal Risetime	30 ps	50 ps	100 ps	250 ps	500 ps
SEAMP 81,82	Maximum Impedance	117.7	110.7	108.7	105.9	108.7
	Minimum Impedance	68.3	74.9	87.2	95.8	100
SEAMP 93,94	Maximum Impedance	119.3	116.2	113.7	112.6	109.8
	Minimum Impedance	65.8	72.7	85.6	94.3	97.9
SEAMP 165,166	Maximum Impedance	118.4	111.9	109	107.6	107.9
	Minimum Impedance	68.9	75.3	87.6	96.5	100
SEAMP 157,158	Maximum Impedance	118.9	112.9	107.6	106.7	106.3
	Minimum Impedance	69.9	76.2	88.3	96.8	100
SEAMP 229,230	Maximum Impedance	116.5	113.8	112.5	111.3	109.4
	Minimum Impedance	69	75.6	88.3	96.5	100


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


SEAMP81,82

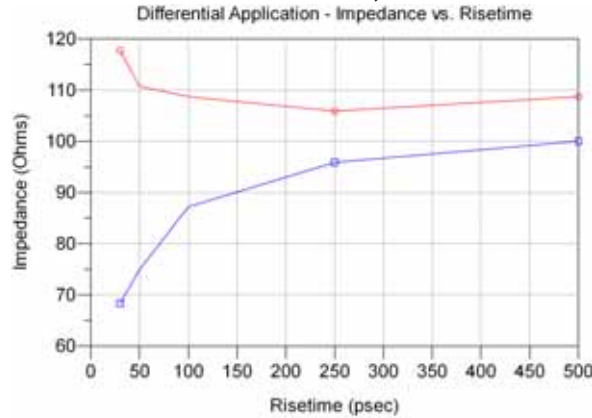


SEAMP93,94

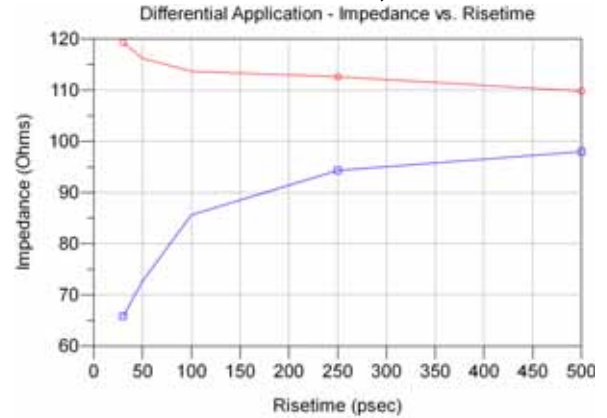


SEAMP 165,166

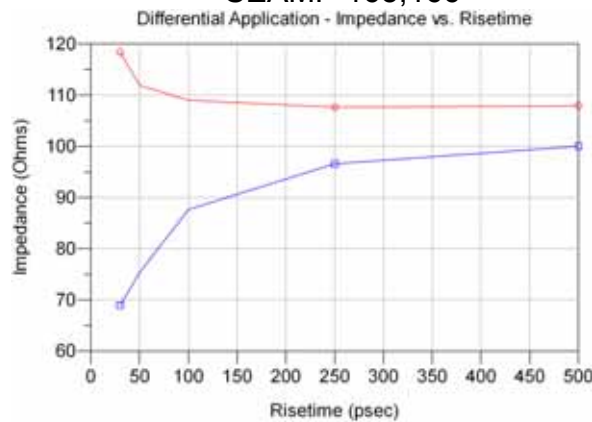

SEAMP 157,158

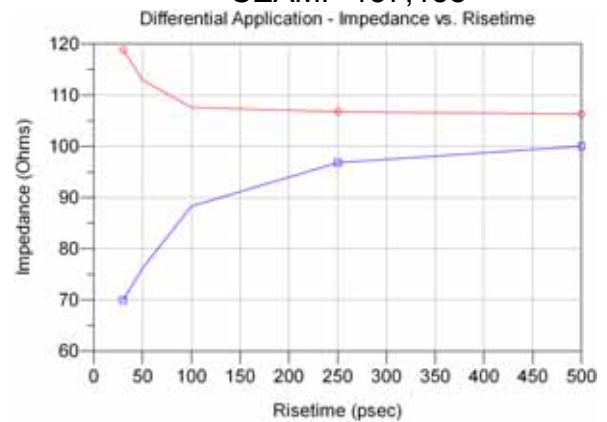

SEAMP 229,230

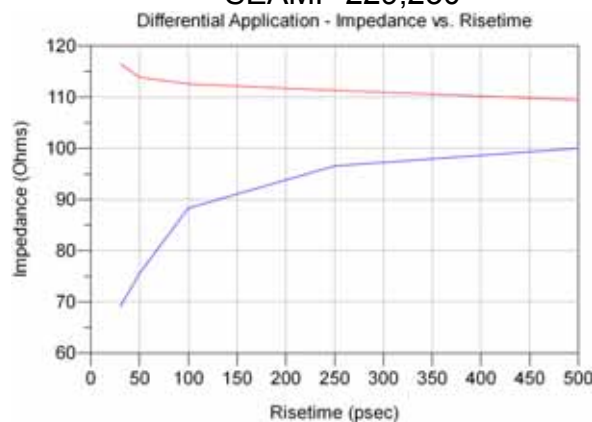






Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 10 – Differential Impedance (Ω) – High Density Vertical						
Driver	Signal Risetime	30 ps	50 ps	100 ps	250 ps	500 ps
SEAMP 121,122	Maximum Impedance	130.1	120.9	110.2	107.7	109.4
	Minimum Impedance	72.6	79.2	91.3	98.5	100
SEAMP 134,135	Maximum Impedance	120	117.9	115	111.2	109.2
	Minimum Impedance	81.5	86.5	96.4	100	100
SEAMP 157,158	Maximum Impedance	113	111.7	111	110.4	110.4
	Minimum Impedance	63	70.3	83.9	94.4	100
SEAMP 218,219	Maximum Impedance	112.8	112.1	110.7	109.4	107.9
	Minimum Impedance	71.9	78.7	89.3	96.9	100
SEAMP 229,230	Maximum Impedance	131.9	122.1	112.9	108.8	111
	Minimum Impedance	84.2	90.8	99.8	100	100

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

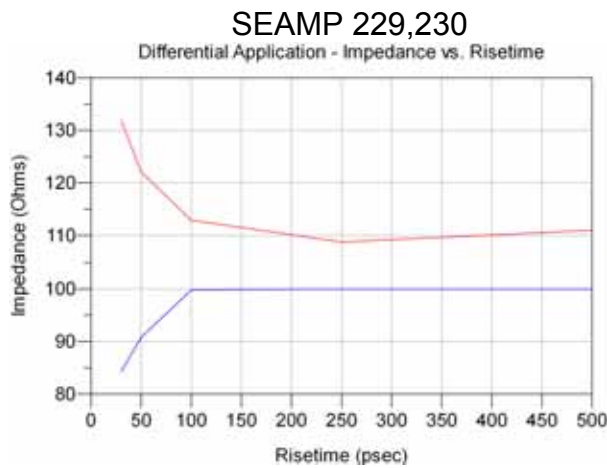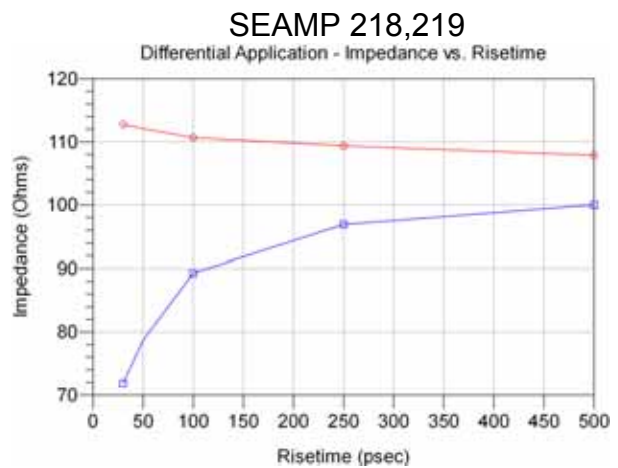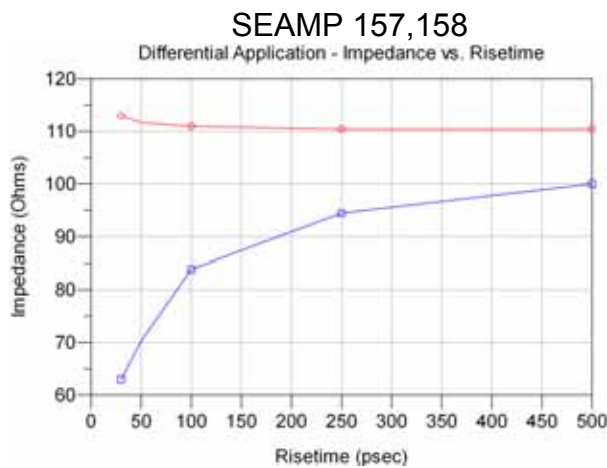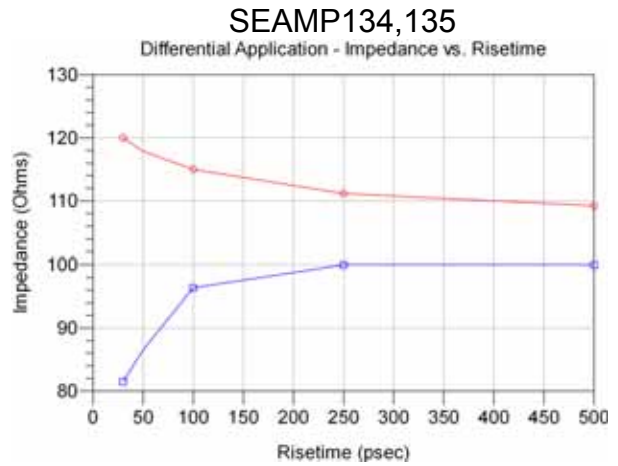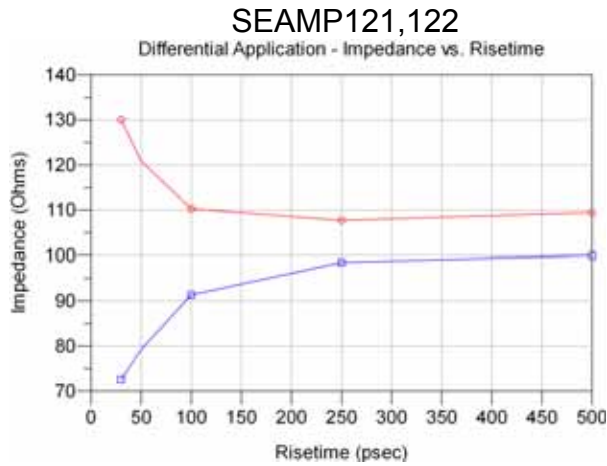


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 11 - Single-Ended Crosstalk (%) – 1:1 S/G Pattern							
Input(t_r)	Driver	Receiver	30ps	50 ps	100 ps	250 ps	500 ps
NEXT	SEAMP_161	SEAMP_163	0.32	0.29	0.25	0.16	<0.1
	SEAMP_163	SEAMP_183	0.58	0.49	0.44	0.32	0.21
	SEAMP_124	SEAMP_126	0.51	0.41	0.29	0.21	0.14
	SEAMP_78	SEAMP_98	0.58	0.5	0.44	0.37	0.26
	SEAMP_78	SEAMP_80	1.36	0.82	0.51	0.29	0.22
FEXT	SEAMP_161	SEAF-RA_163	0.32	0.27	0.24	0.16	0.1
	SEAMP_163	SEAF-RA_183	0.37	0.22	<0.1	<0.1	<0.1
	SEAMP_124	SEAF-RA_126	0.67	0.45	0.2	0.12	<0.1
	SEAMP_78	SEAF-RA_98	1.02	0.77	0.49	0.27	0.19
	SEAMP_78	SEAF-RA_80	1.95	1.39	0.55	0.23	0.16

Single-Ended 1:1 S/G Pattern Crosstalk Pin Map

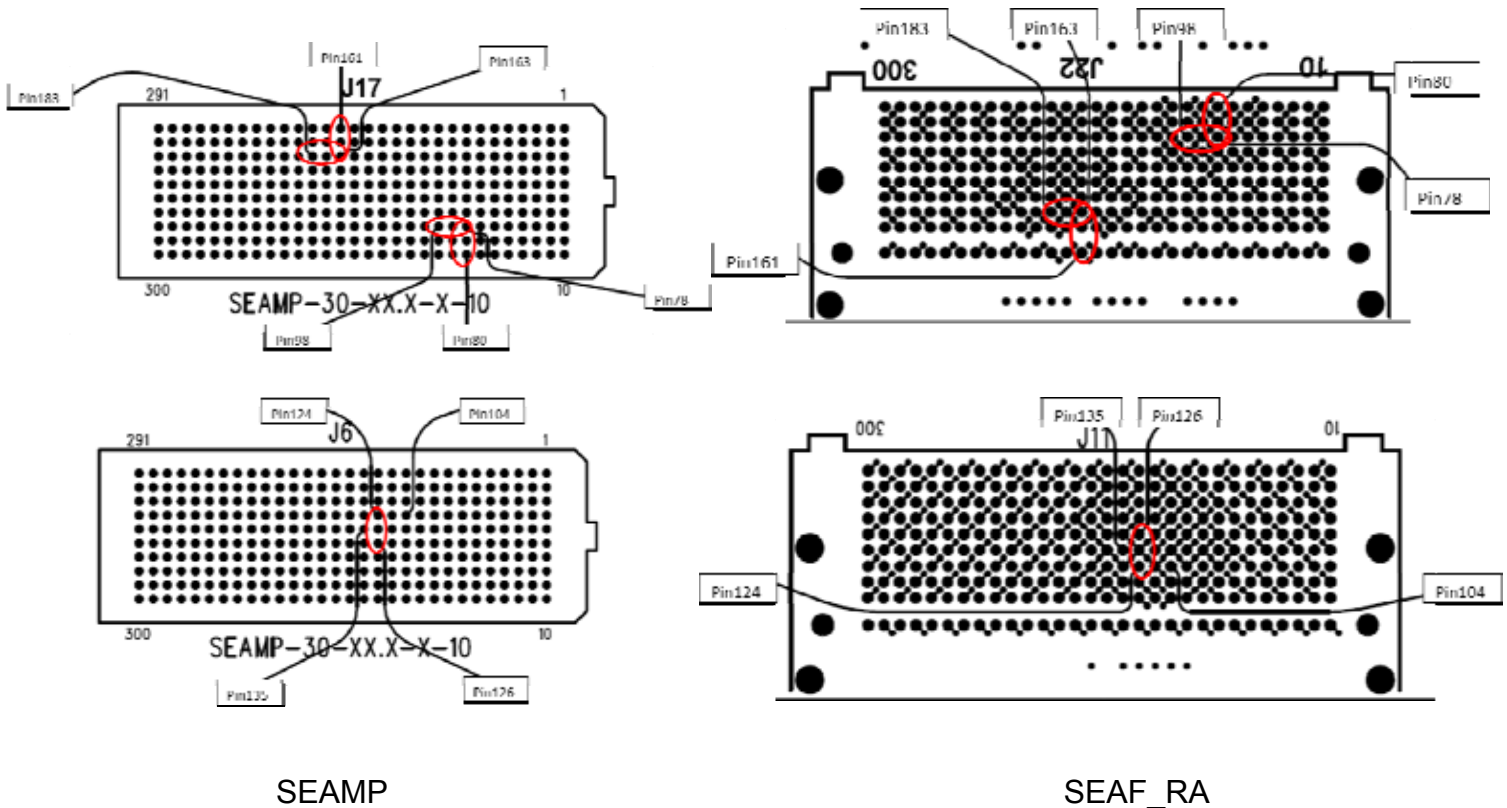


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 12 - Single-Ended Crosstalk (%) – 2:1 S/G Pattern							
Input(tr)	Driver	Receiver	30ps	50 ps	100 ps	250 ps	500 ps
NEXT	SEAMP_151	SEAMP_161	16	15.2	13.56	8.41	4.73
	SEAMP_184	SEAMP_194	12.33	11.71	11.16	8.42	5.08
	SEAMP_155	SEAMP_156	12.36	11.57	10.13	7.9	5.02
	SEAMP_78	SEAMP_88	12.15	11.59	11.2	9.62	6.58
	SEAMP_78	SEAMP_80	1.17	0.9	0.64	0.41	0.34
FEXT	SEAMP_151	SEAF-RA_161	7.87	5.79	4.63	2.83	1.65
	SEAMP_184	SEAF-RA_194	4.33	3.42	3	2.35	1.5
	SEAMP_155	SEAF-RA_156	4.67	3.53	3.04	2.07	1.16
	SEAMP_78	SEAF-RA_88	4.71	3.94	3.23	2.76	1.99
	SEAMP_78	SEAF-RA_80	1.97	1.49	0.75	0.39	0.3

Single-Ended 2:1 S/G Pattern Crosstalk Pin Map



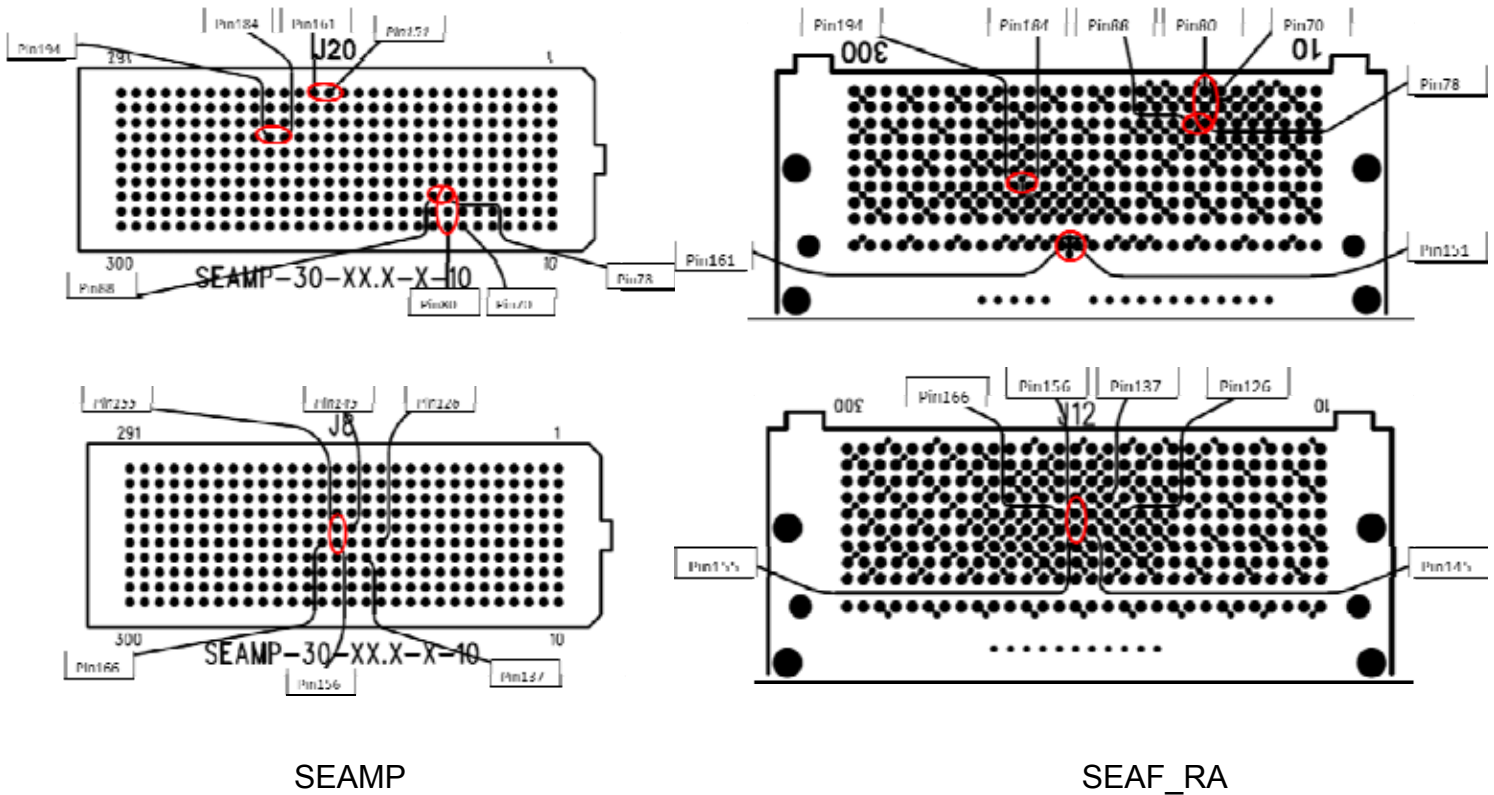


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 13 - Differential Crosstalk (%) – Optimal Horizontal							
Input(tr)	Driver	Receiver	30ps	50 ps	100 ps	250 ps	500 ps
NEXT	SEAMP_61,71	SEAMP_63,73	0.18	0.12	<0.1	<0.1	<0.1
	SEAMP_63,73	SEAMP_84,94	0.91	0.85	0.82	0.6	0.36
	SEAMP_106,116	SEAMP_146,156	0.16	0.12	0.05	<0.1	<0.1
	SEAMP_106,116	SEAMP_127,137	1.00	0.95	0.89	0.76	0.50
	SEAMP_127, 137	SEAMP_148, 158	1.02	0.93	0.84	0.76	0.52
	SEAMP_208, 218	SEAMP_210, 220	1.21	0.71	0.3	0.13	<0.1
FEXT	SEAMP_61,71	SEAF-RA_63, 73	0.33	0.29	0.19	<0.1	<0.1
	SEAMP_63,73	SEAF-RA_84,94	0.21	0.12	<0.1	<0.1	<0.1
	SEAMP_106,116	SEAF-RA_146,156	0.23	0.17	0.1	<0.1	<0.1
	SEAMP_106,116	SEAF-RA_127,137	0.30	0.20	<0.1	<0.1	<0.1
	SEAMP_127, 137	SEAF-RA_148,158	0.65	0.4	0.19	<0.1	<0.1
	SEAMP_208, 218	SEAF-RA_210,220	1.22	0.86	0.28	<0.1	<0.1

Differential Optimal Horizontal Crosstalk Pin Map

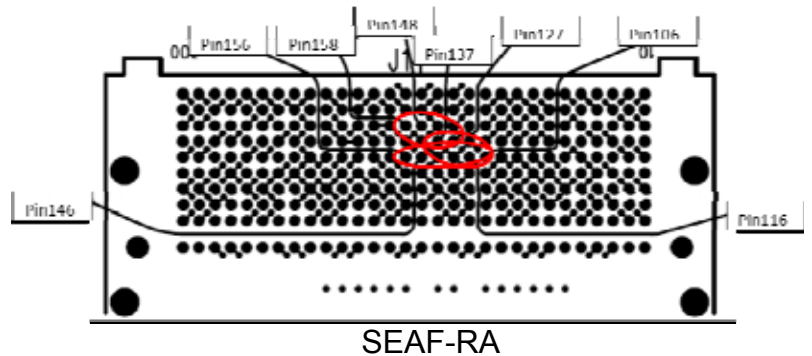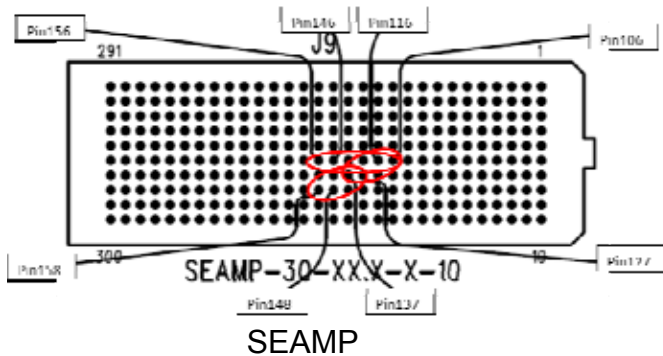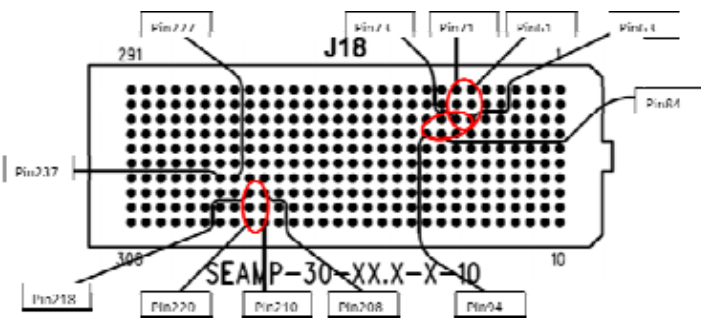


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 14 - Differential Crosstalk (%) – Optimal Vertical							
Input(tr)	Driver	Receiver	30ps	50 ps	100 ps	250 ps	500 ps
NEXT	SEAMP_145, 146	SEAMP_165, 166	0.3	0.26	0.23	0.16	0.1
	SEAMP_145, 146	SEAMP_157, 158	1.07	1.01	0.95	0.82	0.52
	SEAMP_165,166	SEAMP_169, 170	0.22	0.16	<0.1	<0.1	<0.1
	SEAMP_217,218	SEAMP_229, 230	1.13	1.06	0.96	0.87	0.61
FEXT	SEAMP_145, 146	SEAF-RA_165, 166	0.4	0.32	0.24	0.12	<0.1
	SEAMP_145, 146	SEAF-RA_157, 158	0.42	0.23	0.1	<0.1	<0.1
	SEAMP_165,166	SEAF-RA_169, 170	0.39	0.29	0.15	<0.1	<0.1
	SEAMP_217,218	SEAF-RA_229, 230	0.69	0.53	0.31	0.12	<0.1

Differential Optimal Vertical Crosstalk Pin Map

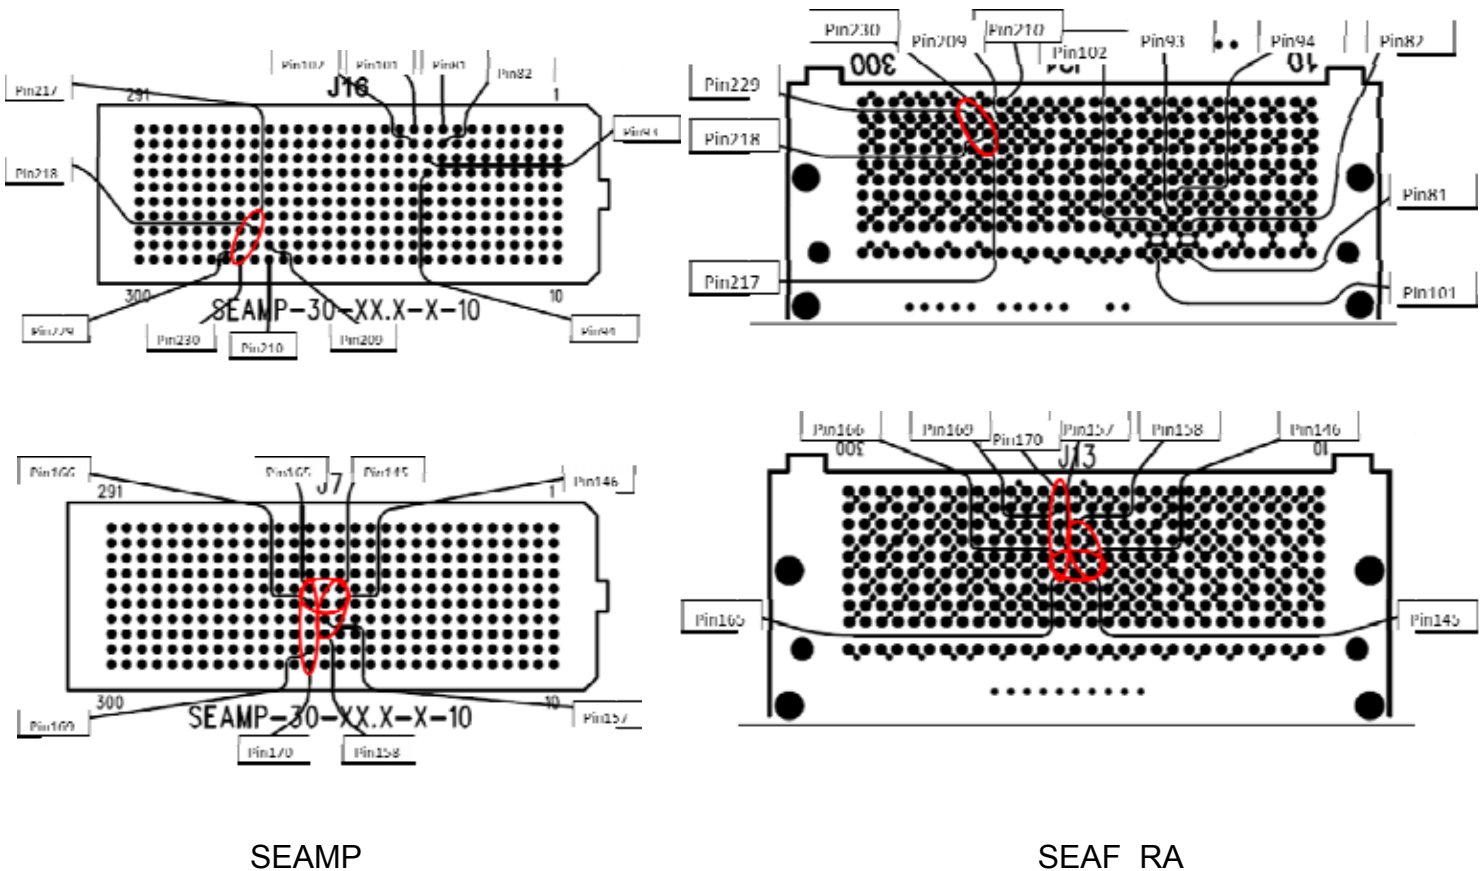





Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 15 - Differential Crosstalk (%) – High Density Vertical

Input(t _r)	Driver	Receiver	30ps	50 ps	100 ps	250 ps	500 ps
NEXT	SEAMP_121,122	SEAMP_132,133	3.42	3.17	2.76	1.86	1.04
	SEAMP_134,135	SEAMP_154,155	0.78	0.62	0.54	0.41	0.25
	SEAMP_134,135	SEAMP_145,146	3.78	3.46	2.95	2.22	1.34
	SEAMP_154,155	SEAMP_157,158	0.30	0.20	0.16	0.13	<0.1
	SEAMP_218, 219	SEAMP_229, 230	3.47	3.20	2.80	2.24	1.46
FEXT	SEAMP_121,122	SEAF-RA_132, 133	0.67	0.35	0.19	<0.1	<0.1
	SEAMP_134,135	SEAF-RA_154,155	0.64	0.57	0.44	0.36	0.23
	SEAMP_134,135	SEAF-RA_145,146	1.16	0.72	0.29	0.17	0.11
	SEAMP_154,155	SEAF-RA_157,158	0.64	0.48	0.28	0.14	<0.1
	SEAMP_218, 219	SEAF-RA_229, 230	1.56	0.94	0.45	0.19	0.1

Differential High Density Vertical Crosstalk Pin Map

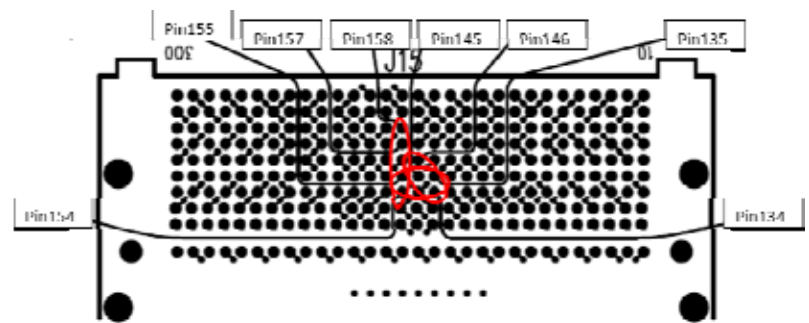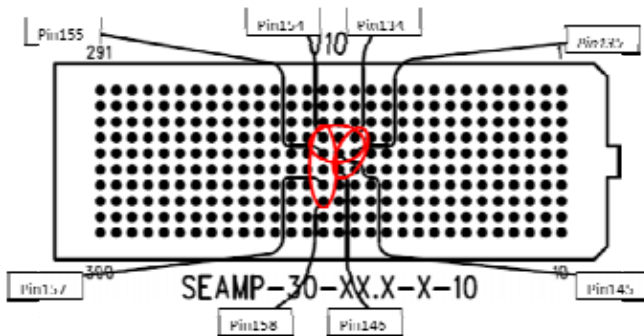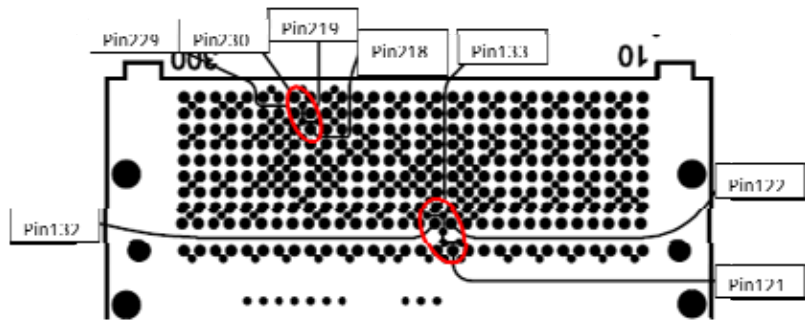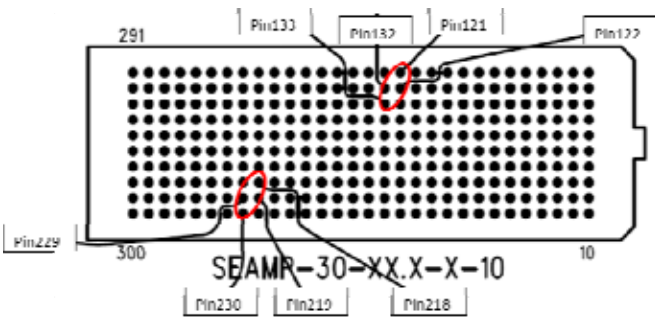

SEAMP

SEAF_RA

Series: SEAMP/SEAF-RA**Description:** 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Table 16 - Propagation Delay (Mated Connector)	
Single-Ended: 1:1 S/G, row1	101 ps
Single-Ended: 1:1 S/G, row4	142 ps
Single-Ended: 1:1 S/G, row6	166 ps
Single-Ended: 1:1 S/G, row8	195 ps
Single-Ended: 1:1 S/G, row10	220 ps
Single-Ended: 2:1 S/G, row1	108 ps
Single-Ended: 2:1 S/G, row4	146 ps
Single-Ended: 2:1 S/G, row6	172 ps
Single-Ended: 2:1 S/G, row8	206 ps
Single-Ended: 2:1 S/G, row10	229 ps
Differential: Optimal Horizontal, row1	97 ps
Differential: Optimal Horizontal, row4	137 ps
Differential: Optimal Horizontal, row7	179 ps
Differential: Optimal Horizontal, row8	194 ps
Differential: Optimal Horizontal, row10	193 ps
Differential: Optimal Vertical, row1,2	106 ps
Differential: Optimal Vertical, row3,4	137 ps
Differential: Optimal Vertical, row5,6	162 ps
Differential: Optimal Vertical, row7,8	192 ps
Differential: Optimal Vertical, row9,10	192 ps

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential: High Density Vertical, row1,2	112 ps
Differential: High Density Vertical, row4,5	155 ps
Differential: High Density Vertical, row7,8	193 ps
Differential: High Density Vertical, row8,9	209 ps
Differential: High Density Vertical, row9,10	213 ps

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Characterization Details

This report presents data that characterizes the signal integrity response of a connector pair in a controlled printed circuit board (PCB) environment. All efforts are made to reveal typical best-case responses inherent to the system under test (SUT).

In this report, the SUT includes the connector pair and footprint effects on a typical multi-layer PCB. PCB effects (trace loss) are de-embedded from test data. Board related effects, such as pad-to-ground capacitance, are included in the data presented in this report.

Additionally, intermediate test signal connections can mask the connector's true performance. Such connection effects are minimized by using high performance test cables and adapters. Where appropriate, calibration and de-embedding routines are also used to reduce residual effects.

Differential and Single-Ended Data

Most Samtec connectors can be used successfully in both differential and single-ended applications. However, electrical performance will differ depending on the signal drive type. In this report, data is presented for both differential and single-ended drive scenarios.

Connector Signal to Ground Ratio

Samtec connectors are most often designed for generic applications and can be implemented using various signal and ground pin assignments. In high speed systems, provisions must be made in the interconnect for signal return currents. Such paths are often referred to as "ground". In some connectors, a ground plane or blade, or an outer shield, is used as the signal return, while in others, connector pins are used as signal returns. Various combinations of signal pins, ground blades, and shields can also be utilized. Electrical performance can vary significantly depending upon the number and location of ground pins.

In general, the more pins dedicated to ground, the better electrical performance will be. However, dedicating pins to ground reduces signal density of a connector. Therefore, care must be taken when choosing signal/ground ratios in cost or density-sensitive applications.


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


For this connector, the following array configurations are evaluated:

- Open pin field
- G Grounded pin field
- Signal pin field
- T 50 ohm termination field

Single-Ended 1:1 pattern

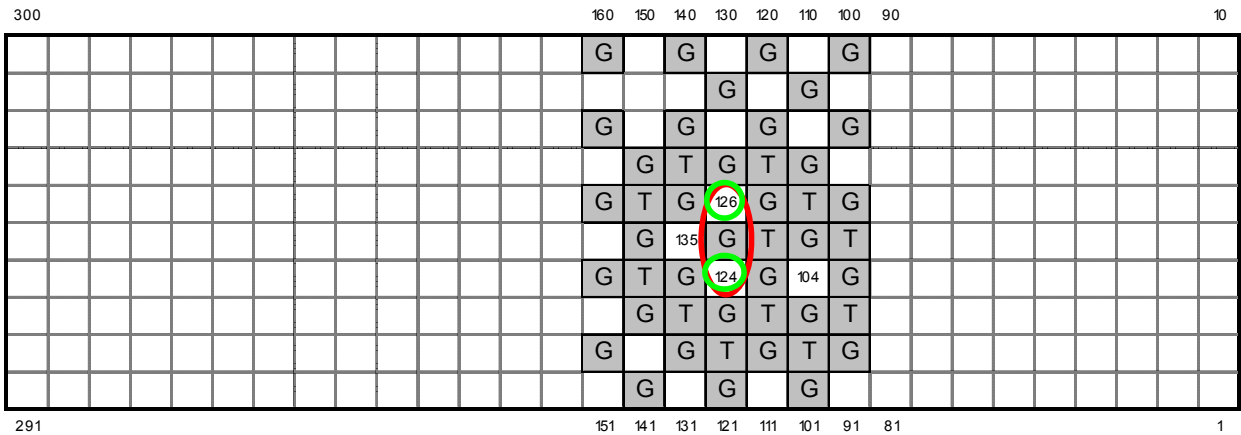


Single-Ended 1:1 pattern

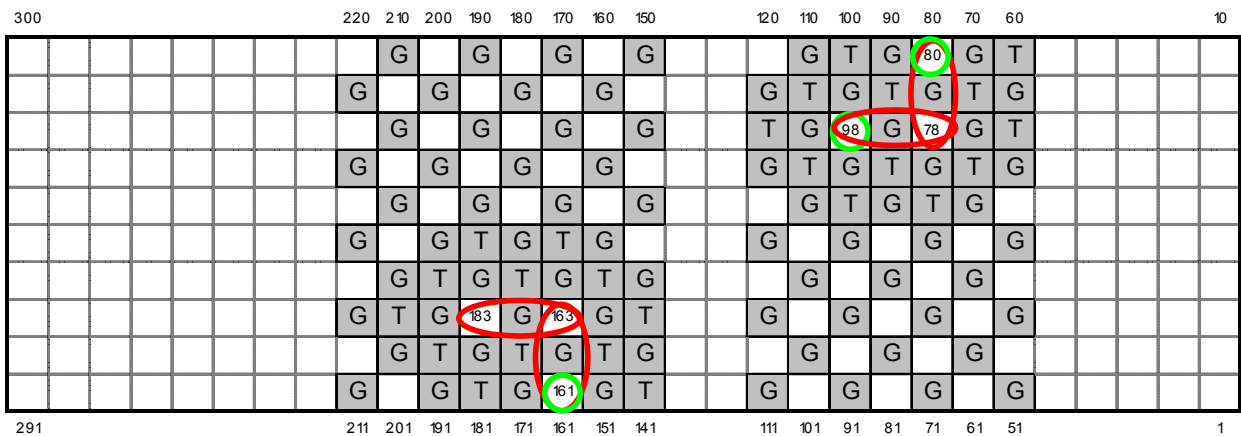


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 pattern

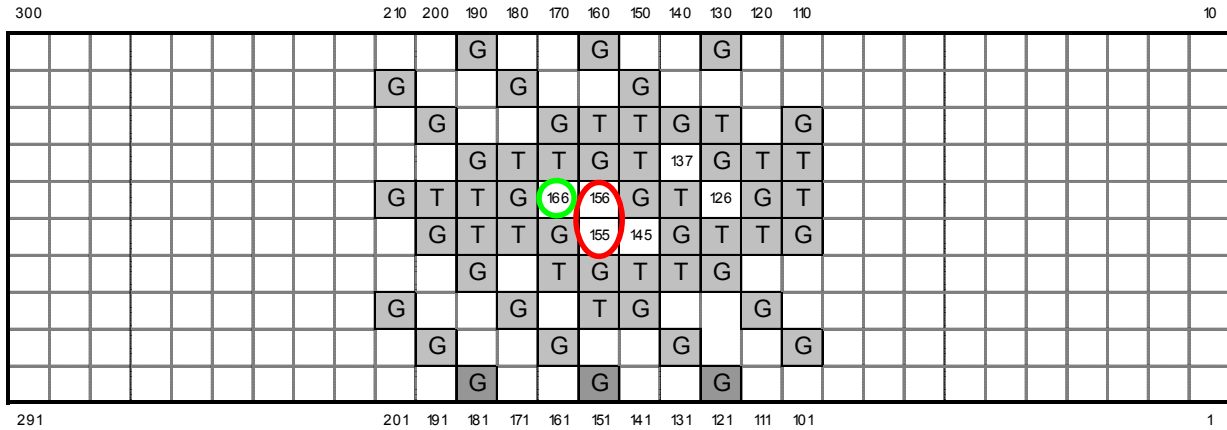

Single-Ended 2:1 pattern

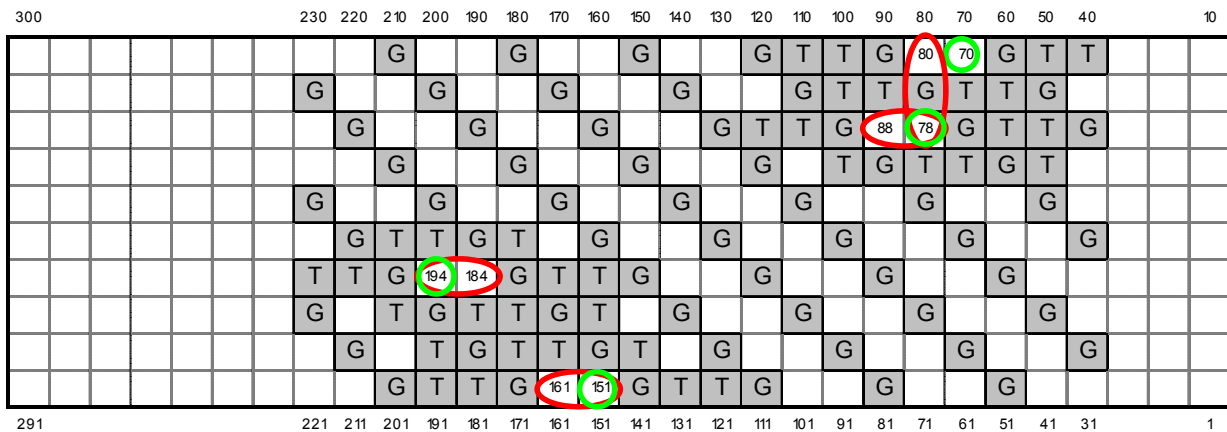

Single-Ended Impedance (denoted by green circles):

- 1:1 S:G ratio
- 2:1 S:G ratio

Single-Ended Crosstalk (denoted by red circles):


- 1:1 S:G ratio
- 2:1 S:G ratio




Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Horizontal

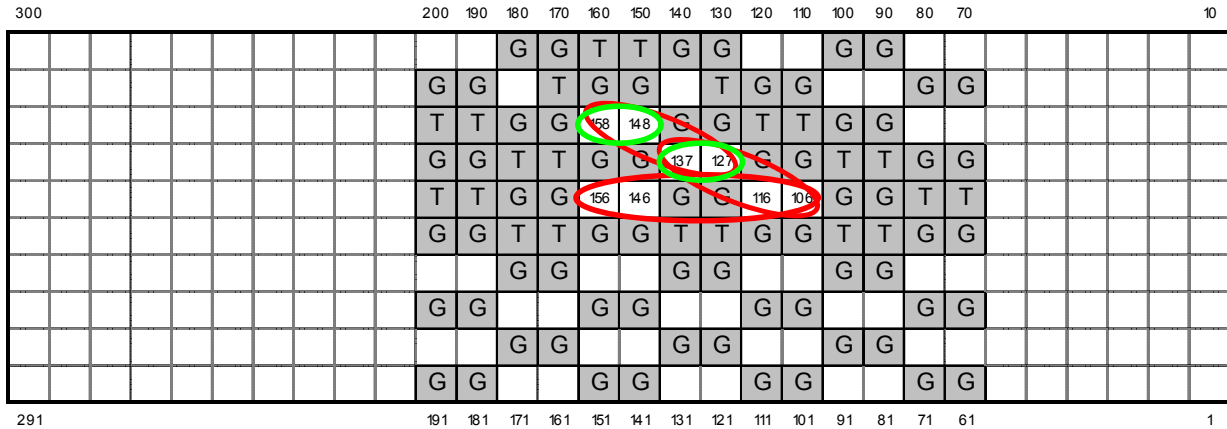


Differential Optimal Horizontal

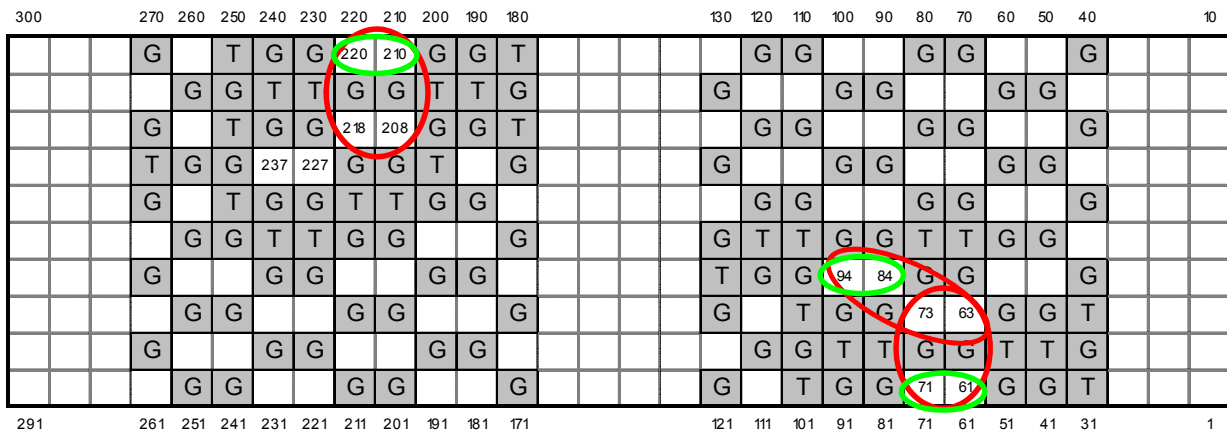


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential High Density Vertical

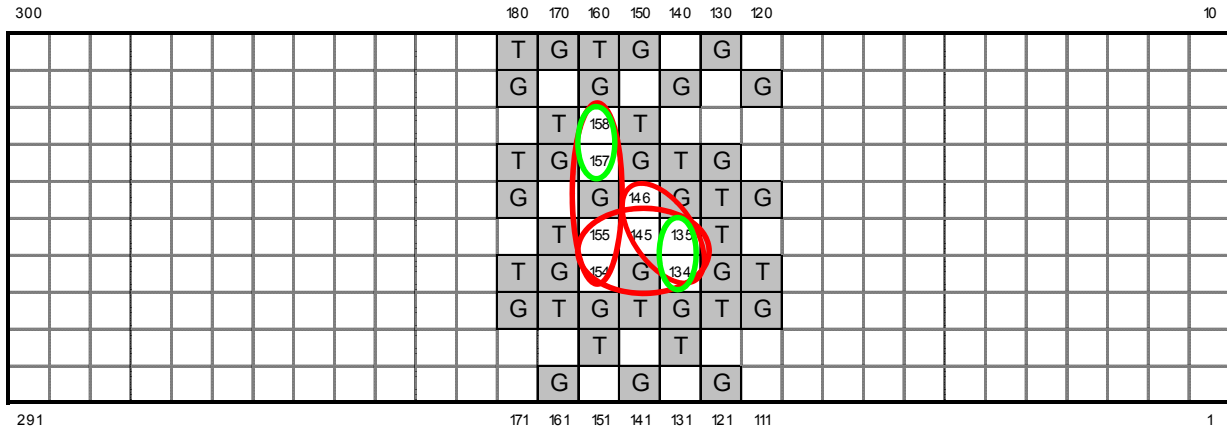

Differential High Density Vertical

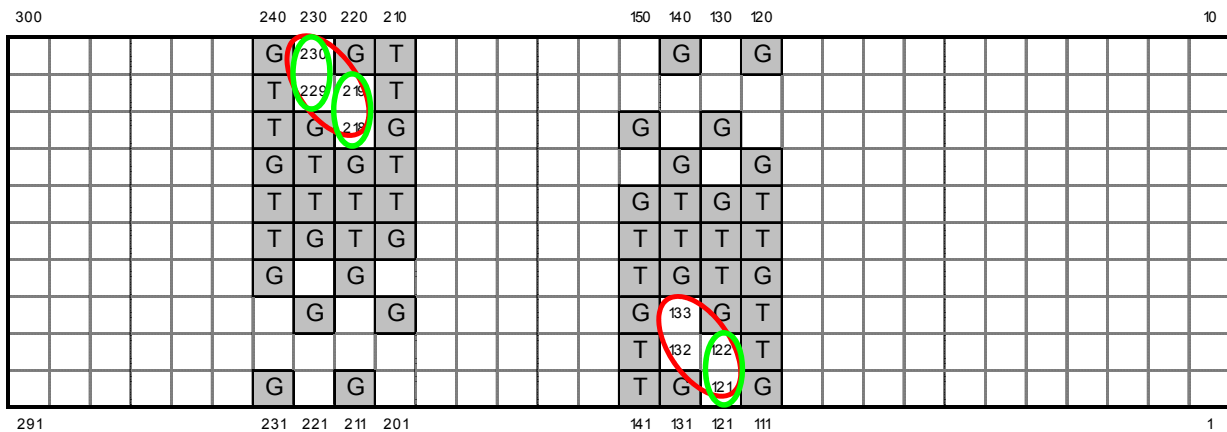

Differential Impedance (denoted by green circles):

- Optimal Horizontal
- Optimal Vertical
- High Density Vertical

Differential Crosstalk (denoted by red circles):

- Optimal Horizontal
- Optimal Vertical
- High Density Vertical

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Only one single-ended signal or differential pair was driven for crosstalk measurements.

Other configurations can be evaluated upon request. Please contact sig@samtec.com for more information.

In a real system environment, active signals might be located at the outer edges of the signal contacts of concern, as opposed to the ground signals utilized in laboratory testing. For example, in a single-ended system, a pin-out of “SSSS”, or four adjacent single ended signals might be encountered as opposed to the “GSG” and “GSSG” configurations tested in the laboratory. Electrical characteristics in such applications could vary slightly from laboratory results. However, in most applications, performance can safely be considered equivalent.

Signal Edge Speed (Rise Time):

In pulse signaling applications, the perceived performance of the interconnect can vary significantly depending on the edge rate or rise time of the exciting signal. For this report, the fastest rise time used was 30 ps. Generally, this should demonstrate worst-case performance.

In many systems, the signal edge rate will be significantly slower at the connector than at the driver launch point. To estimate interconnect performance at other edge rates, data is provided for several rise times between 30ps and 500ps.

For this report, measured rise times were at 10%-90% signal levels.

Frequency Domain Data

Frequency Domain parameters are helpful in evaluating the connector system’s signal loss and crosstalk characteristics across a range of sinusoidal frequencies. In this report, parameters presented in the Frequency Domain are Insertion Loss, Return Loss, and Near-End and Far-End Crosstalk. Other parameters or formats, such as VSWR or S-Parameters, may be available upon request. Please contact our Signal Integrity Group at sig@samtec.com for more information.

Frequency performance characteristics for the SUT are generated directly from network analyzer measurements.

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Time Domain Data

Time Domain parameters indicate Impedance mismatch versus length, signal propagation time, and crosstalk in a pulsed signal environment. The measured S-Parameters from the network analyzer are post-processed using Agilent Advanced Design System to obtain the time domain response. Time Domain procedure is provided in [Appendix E](#) of this report. Parameters or formats not included in this report may be available upon request. Please contact our Signal Integrity Group at sig@samtec.com for more information.

In this report, propagation delay is defined as the signal propagation time through the connector and connector footprint. It includes 10 mils of PCB trace on each end of the connector. Delay is measured at 100 picoseconds signal rise-time. Delay is calculated as the difference in time measured between the 50% amplitude levels of the input and output pulses.

Crosstalk or coupled noise data is provided for various signal configurations. All measurements are single disturber. Crosstalk is calculated as a ratio of the input line voltage to the coupled line voltage. The input line is sometimes described as the active or drive line. The coupled line is sometimes described as the quiet or victim line. Crosstalk ratio is tabulated in this report as a percentage. Measurements are made at both the near-end and far-end of the SUT.

Data for other configurations may be available. Please contact our Signal Integrity Group at sig@samtec.com for further information.

As a rule of thumb, 10% crosstalk levels are often used as a general first pass limit for determining acceptable interconnect performance. However, modern system crosstalk tolerance can vary greatly. For advice on connector suitability for specific applications, please contact our Signal Integrity Group at sig@samtec.com.


Additional information concerning test conditions and procedures is located in the appendices of this report. Further information may be obtained by contacting our Signal Integrity Group at sig@samtec.com.

Series: SEAMP/SEAF-RA


Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Appendix A – Frequency Domain Response Graphs

Single-Ended 1:1 S/G Pattern Application – Insertion Loss

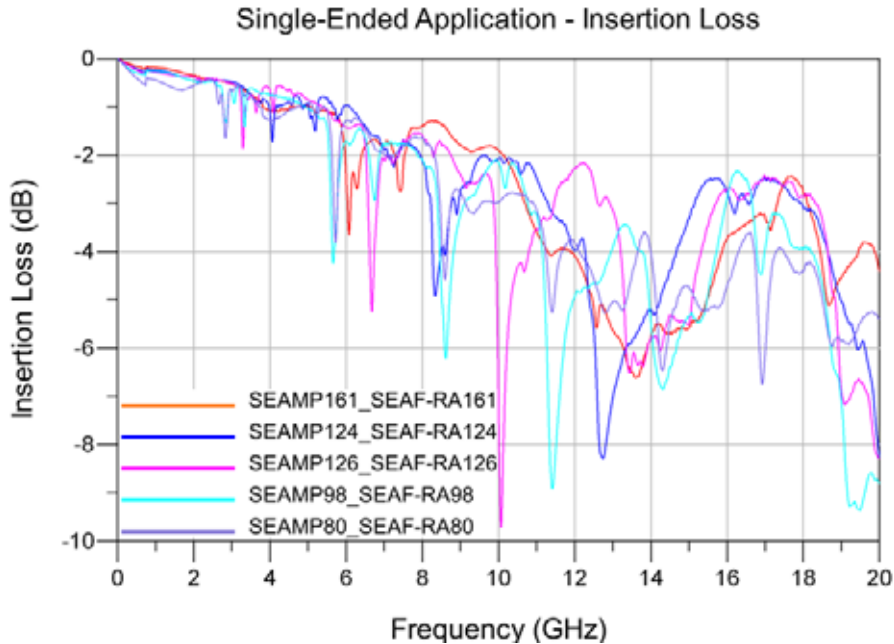


Single-Ended 1:1 S/G Pattern Application – Return Loss

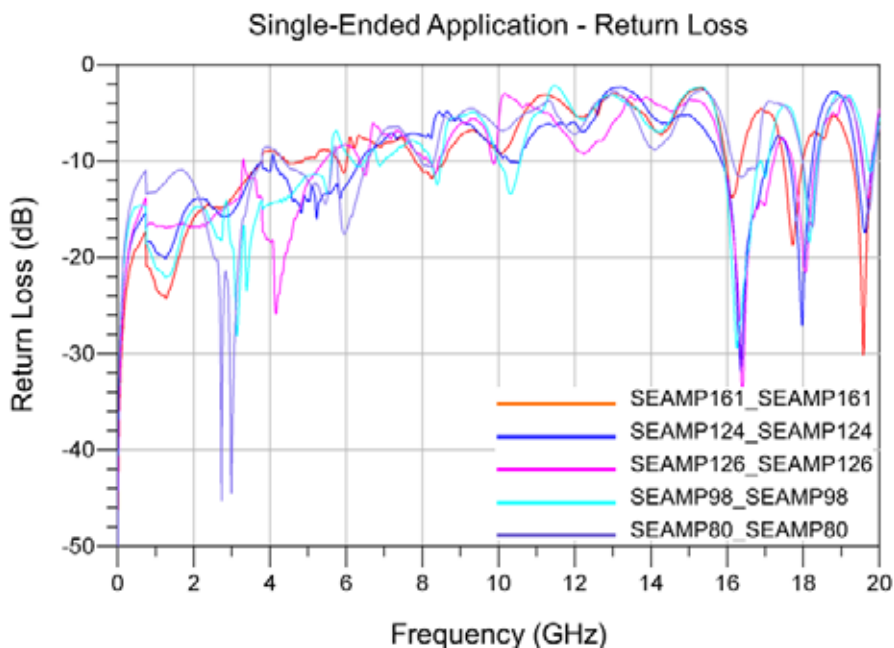


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 1:1 S/G Pattern Application – NEXT

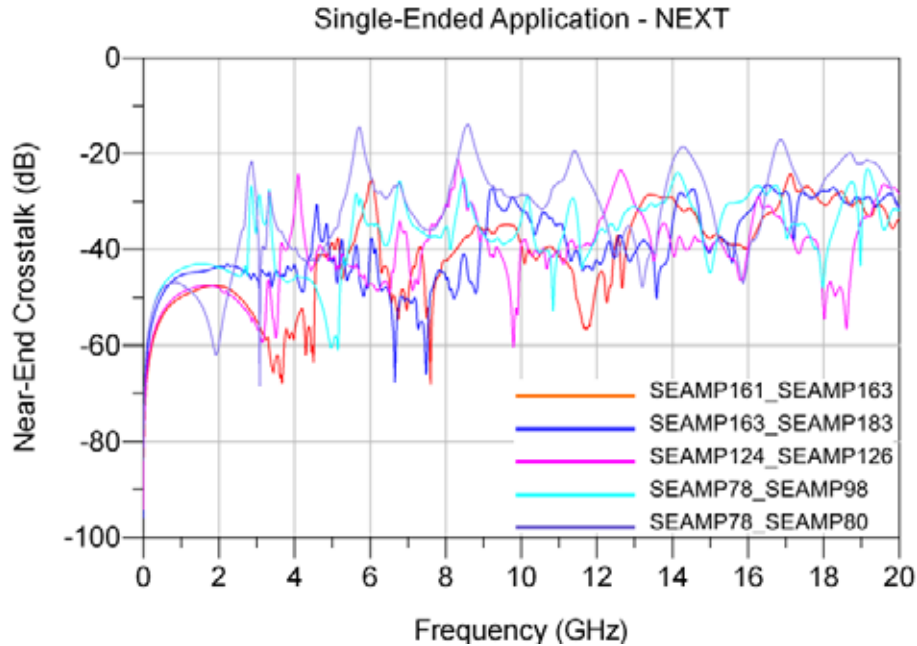


Single-Ended 1:1 S/G Pattern Application – FEXT

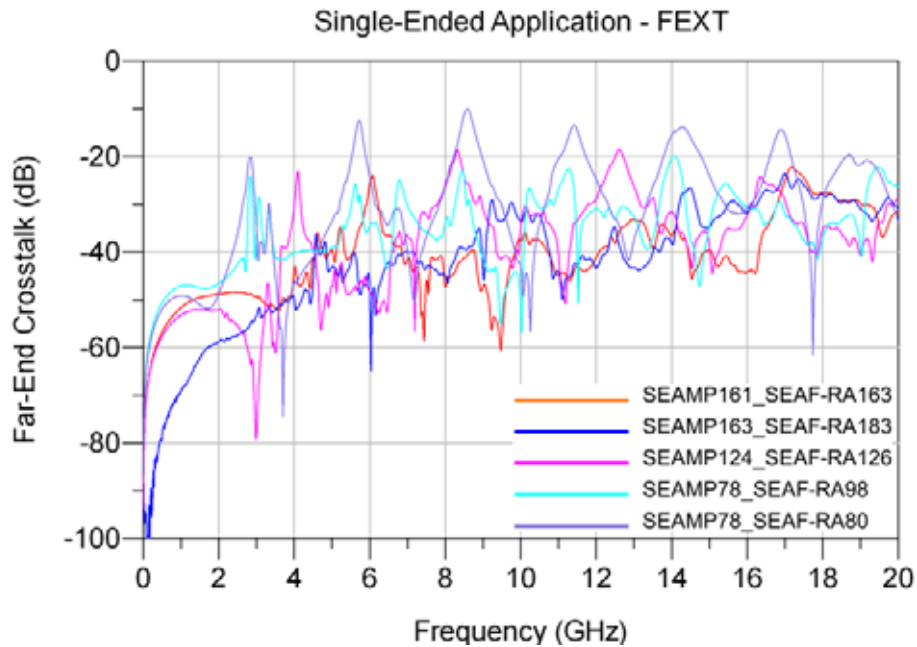


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 S/G Pattern Application – Insertion Loss

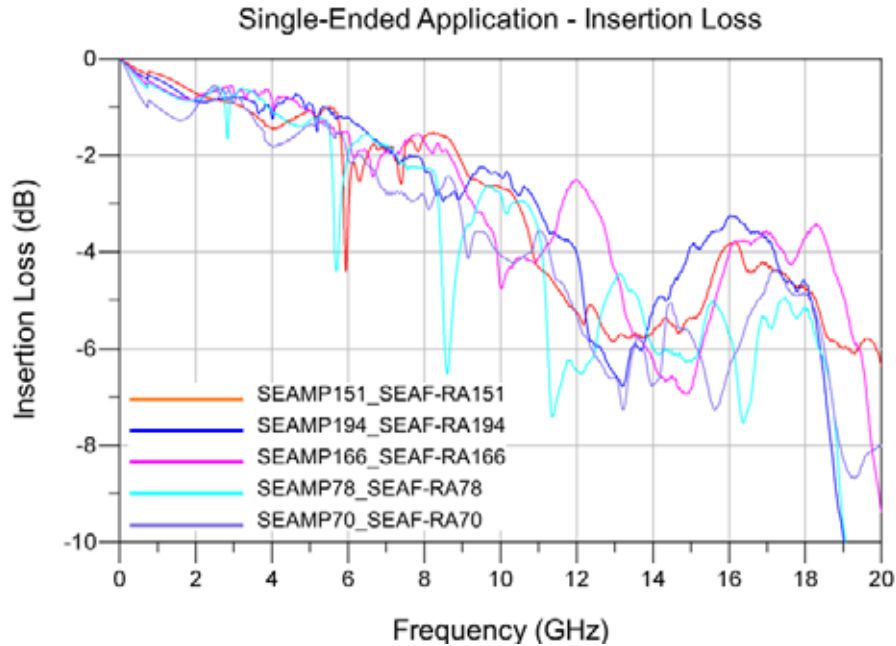


Single-Ended 2:1 S/G Pattern Application – Return Loss

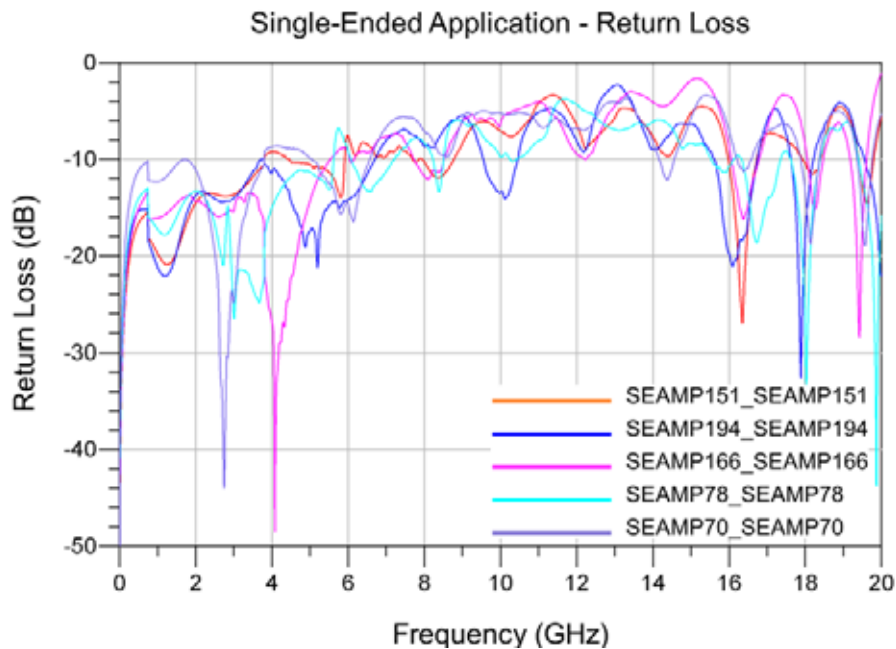


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 S/G Pattern Application – NEXT

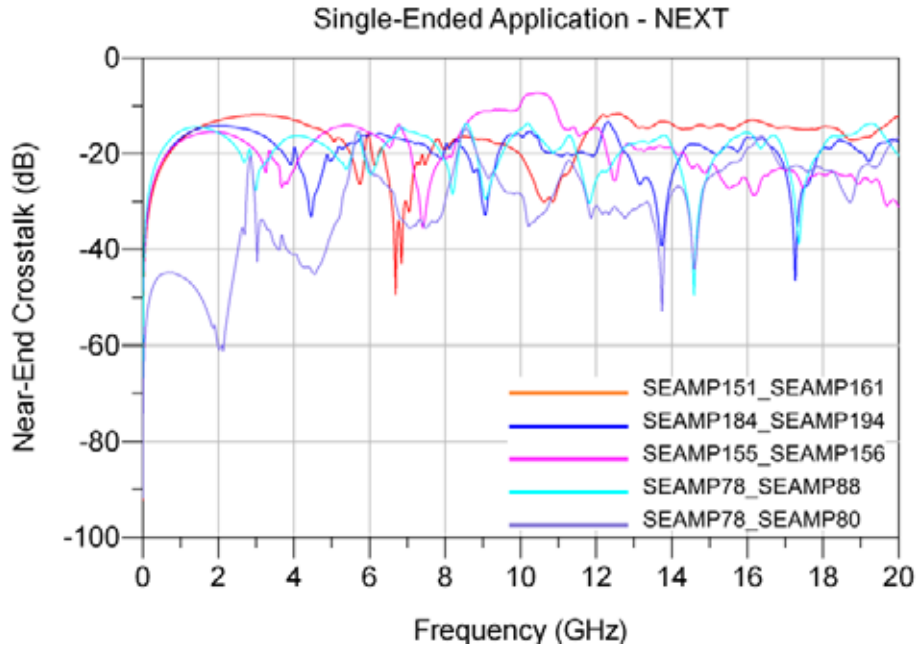


Single-Ended 2:1 S/G Pattern Application – FEXT

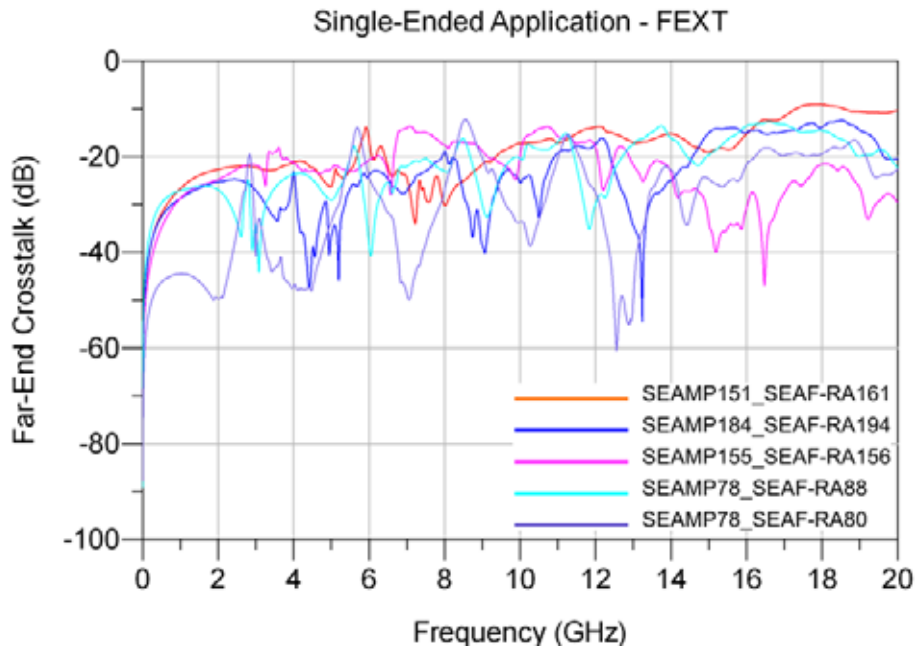


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Horizontal Application – Insertion Loss

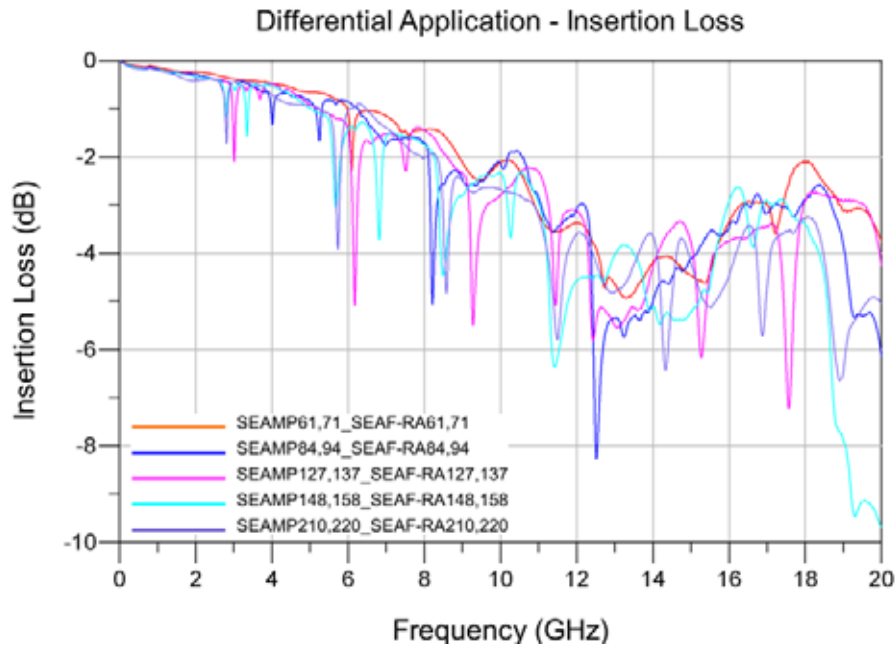


Differential Optimal Horizontal Application – Return Loss

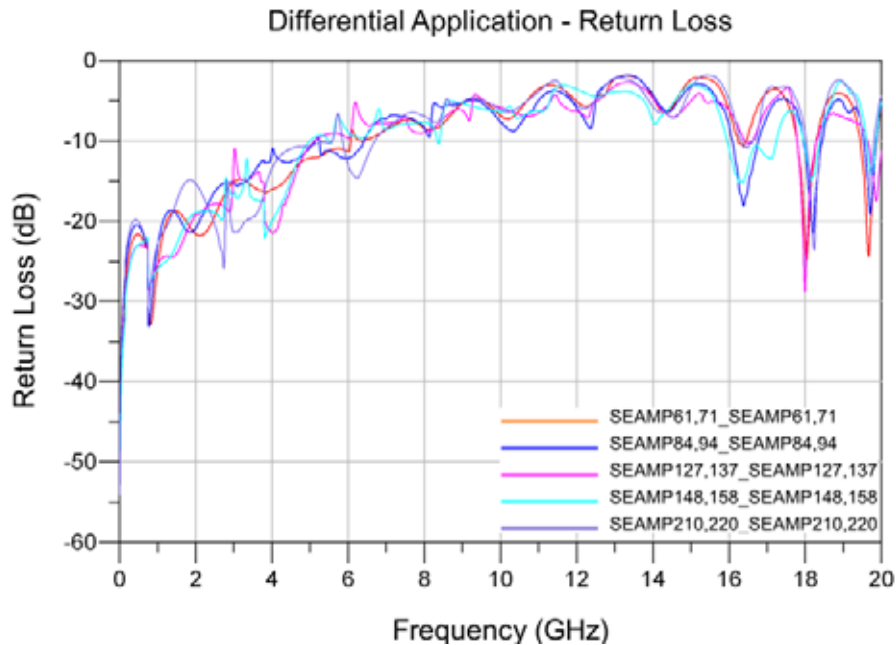


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Horizontal Application – NEXT

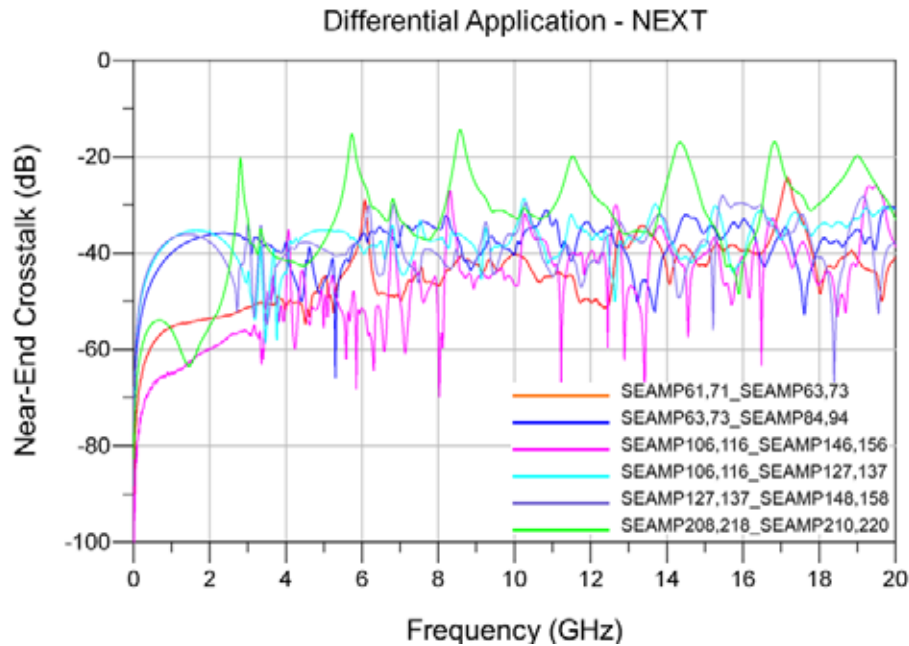


Differential Optimal Horizontal Application – FEXT

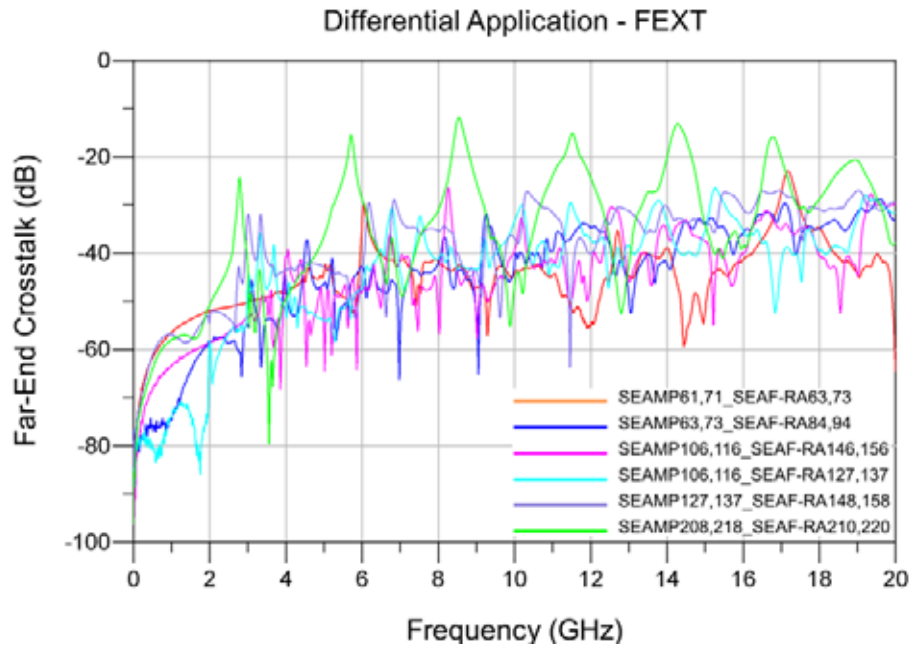


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Vertical Application – Insertion Loss

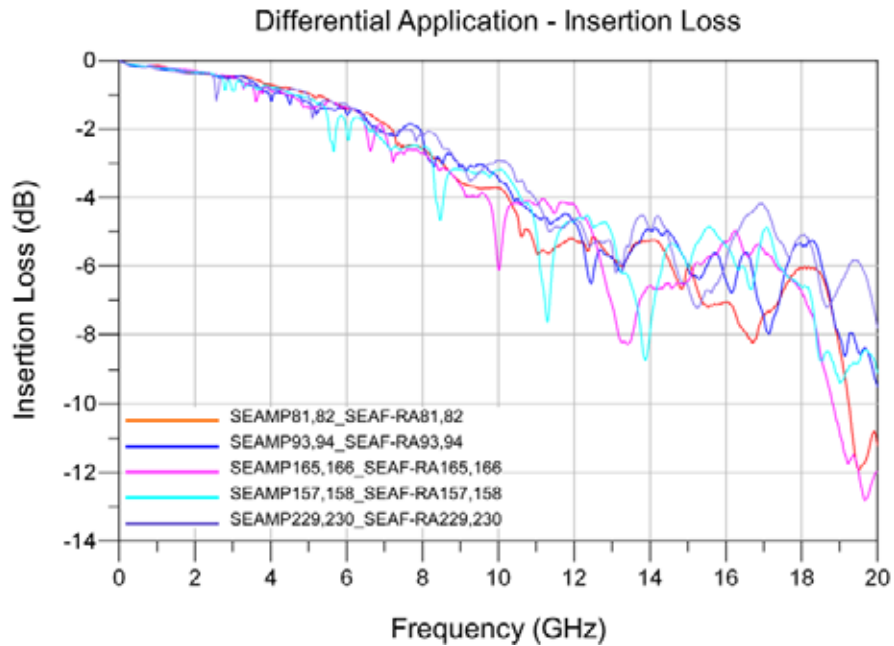


Differential Optimal Vertical Application – Return Loss

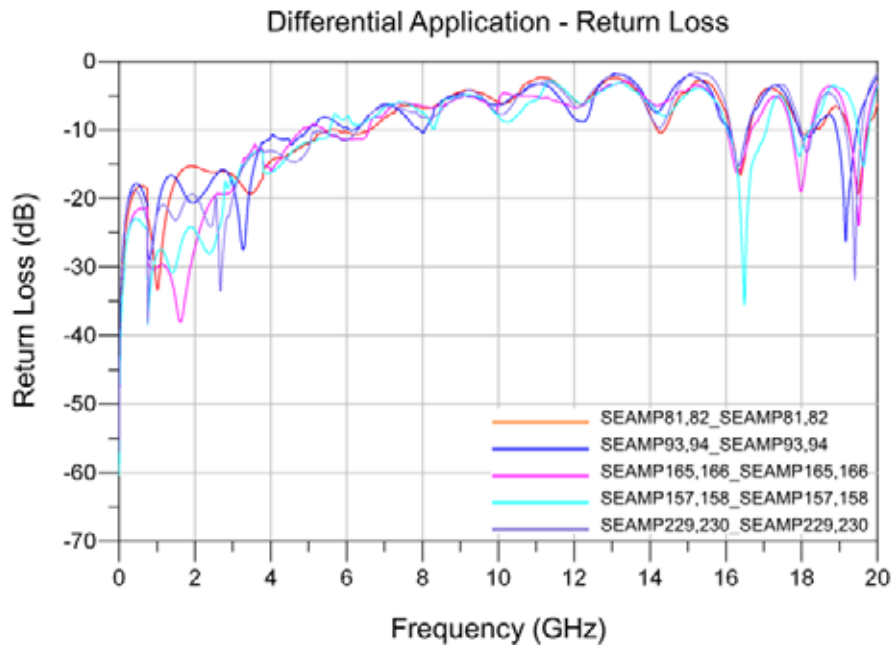


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Vertical Application – NEXT

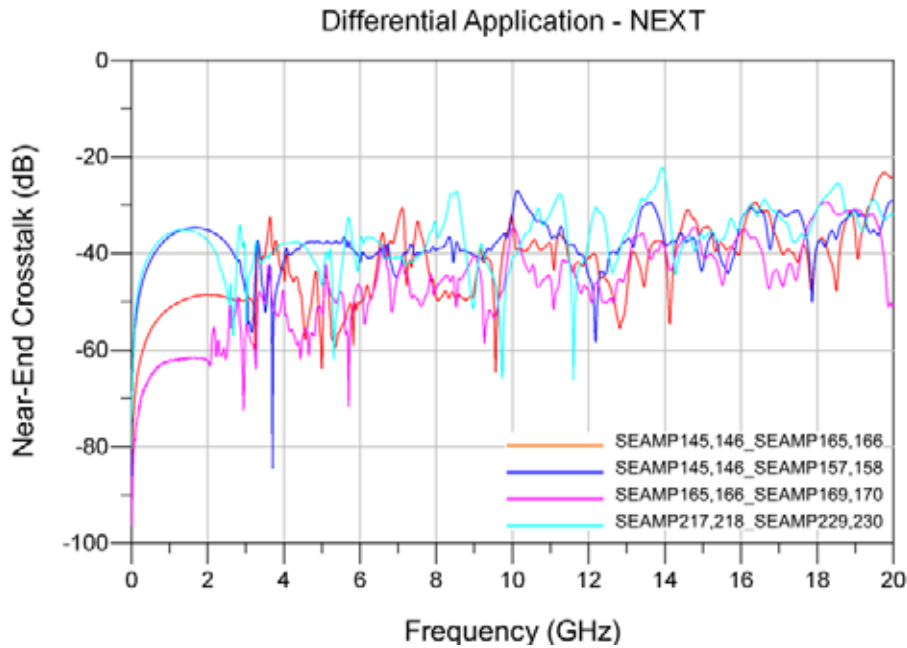


Differential Optimal Vertical Application – FEXT

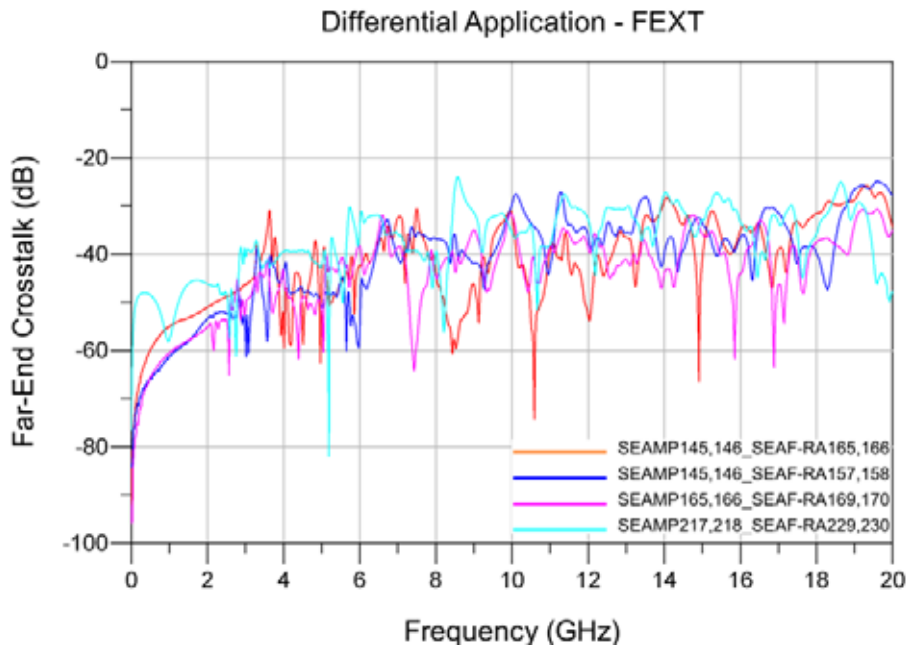


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential High Density Vertical Application – Insertion Loss

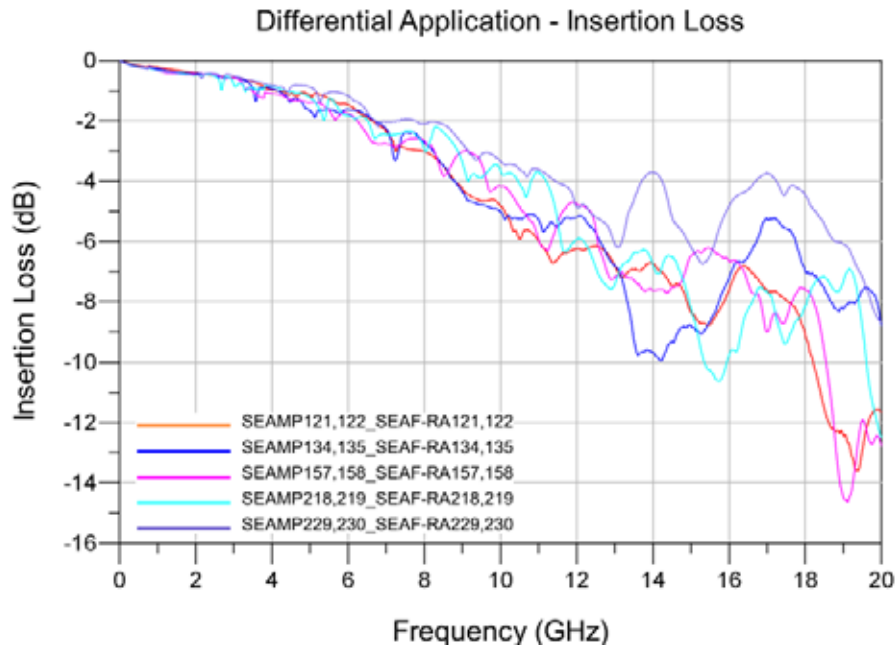


Differential High Density Vertical Application – Return Loss

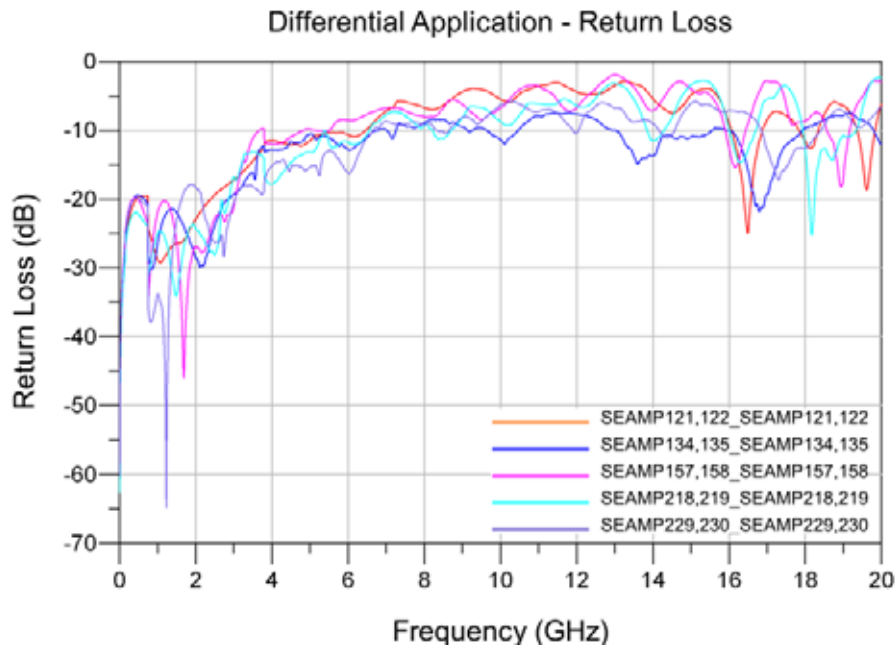


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential High Density Vertical Application – NEXT

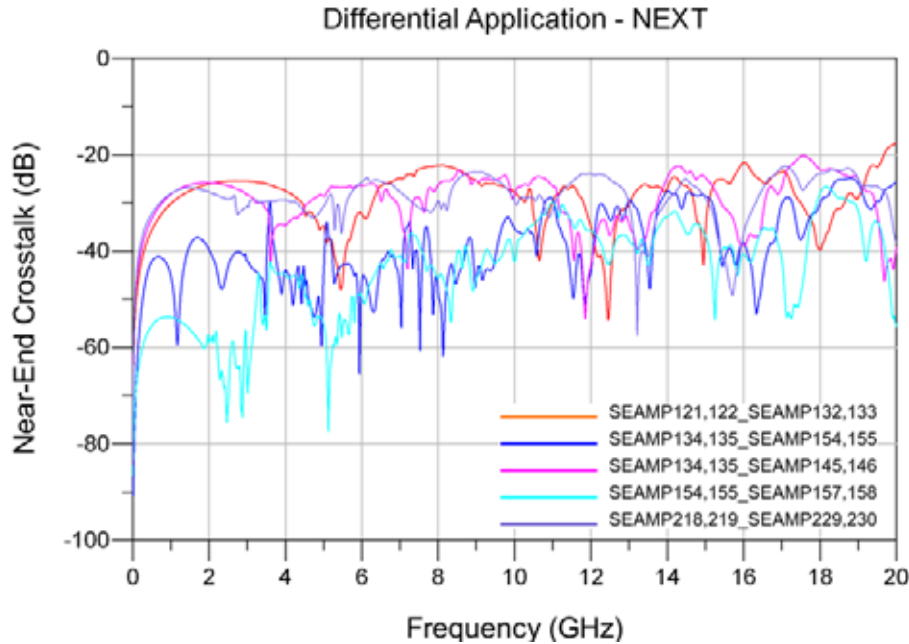

Differential High Density Vertical Application – FEXT

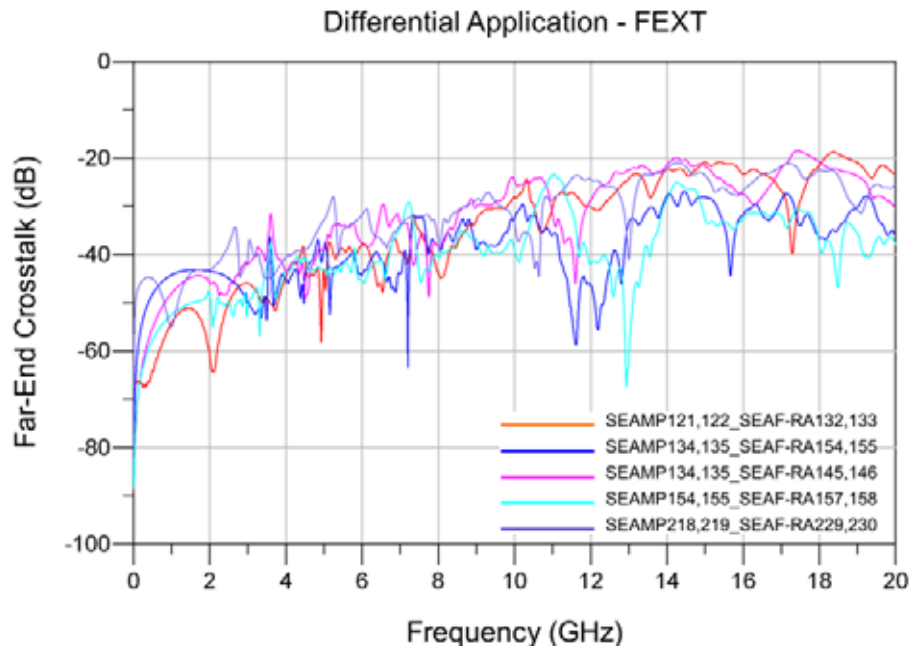


Series: SEAMP/SEAF-RA


Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Appendix B – Time Domain Response Graphs

Single-Ended Application – Input Pulse


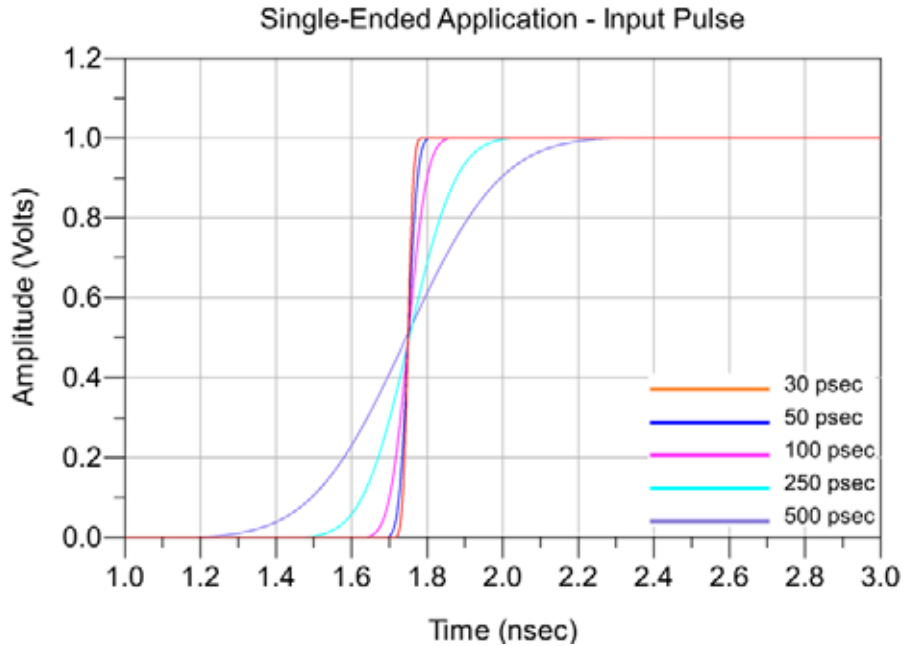


Single-Ended 1:1 S/G Pattern Application – Impedance

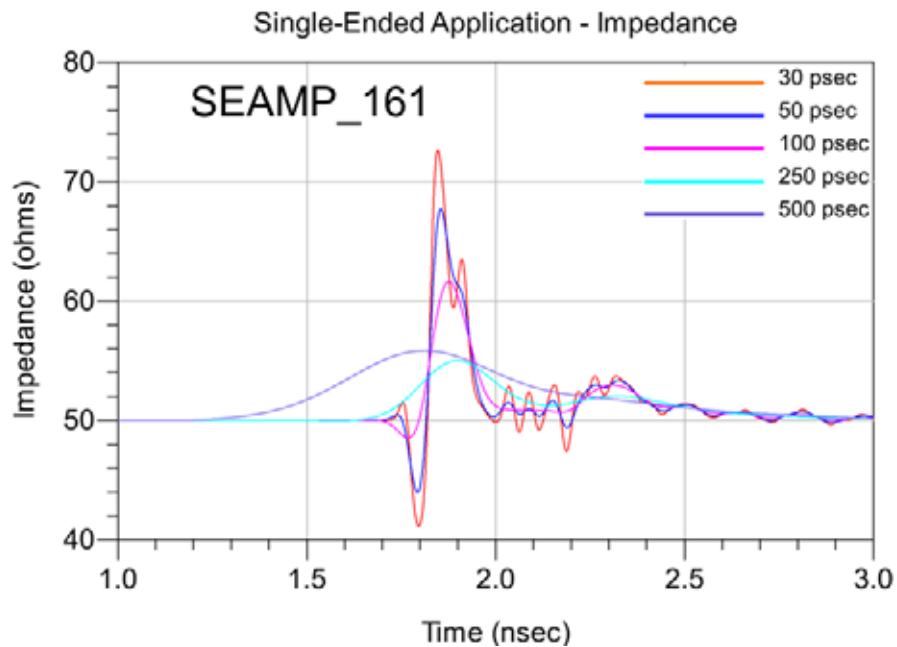



Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

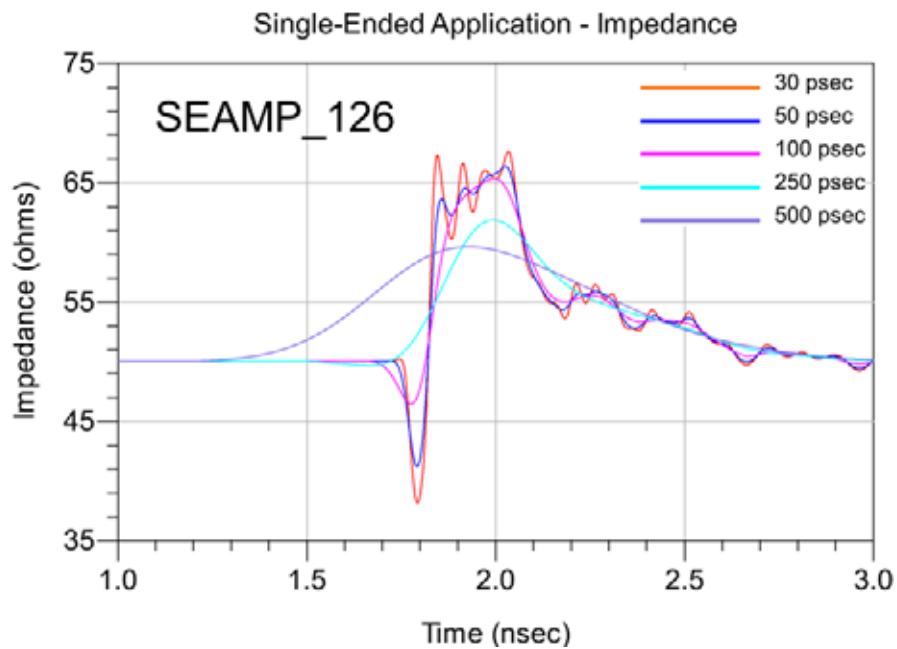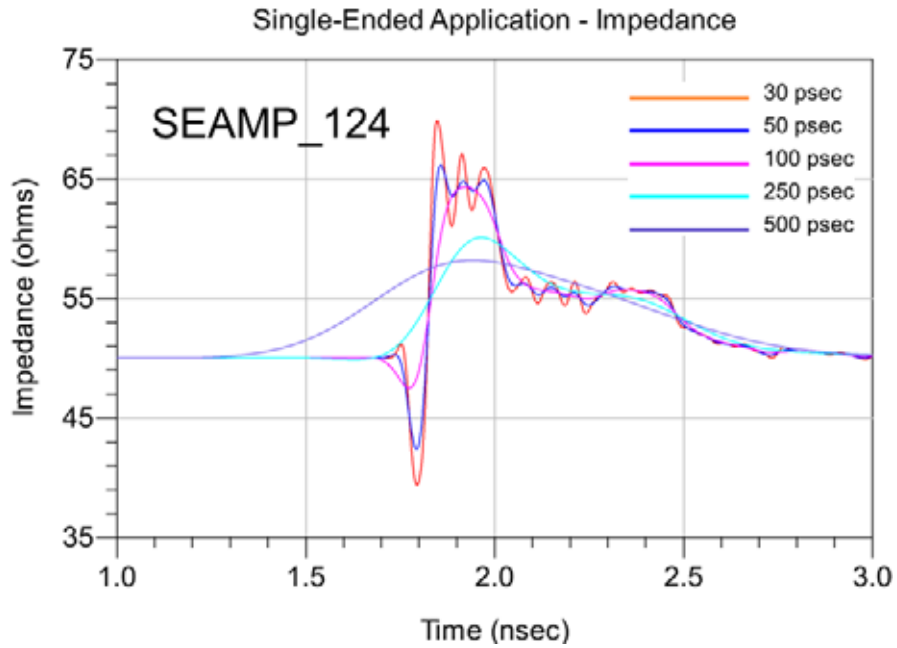

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

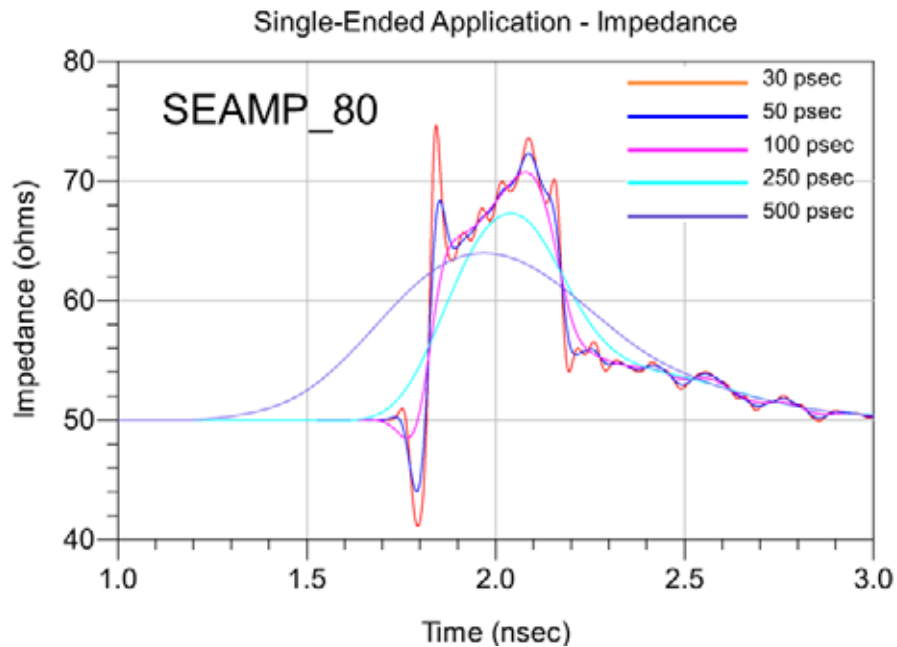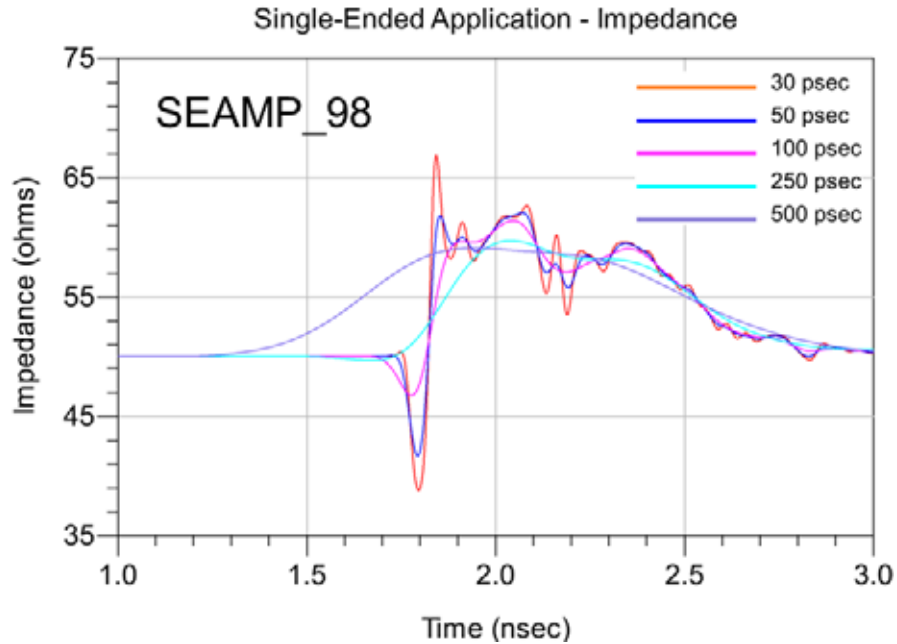

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 1:1 S/G Pattern Application – Propagation Delay

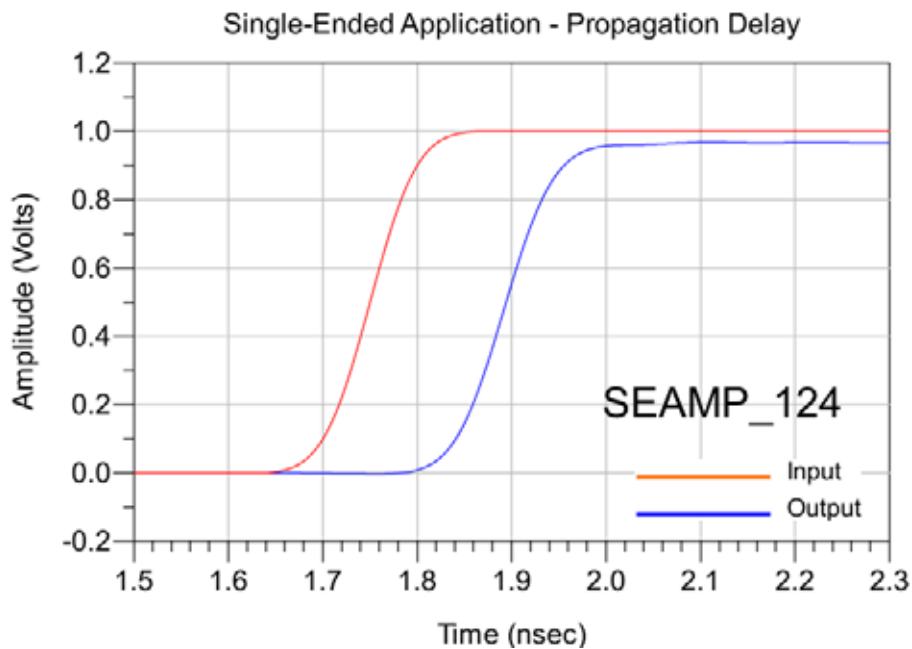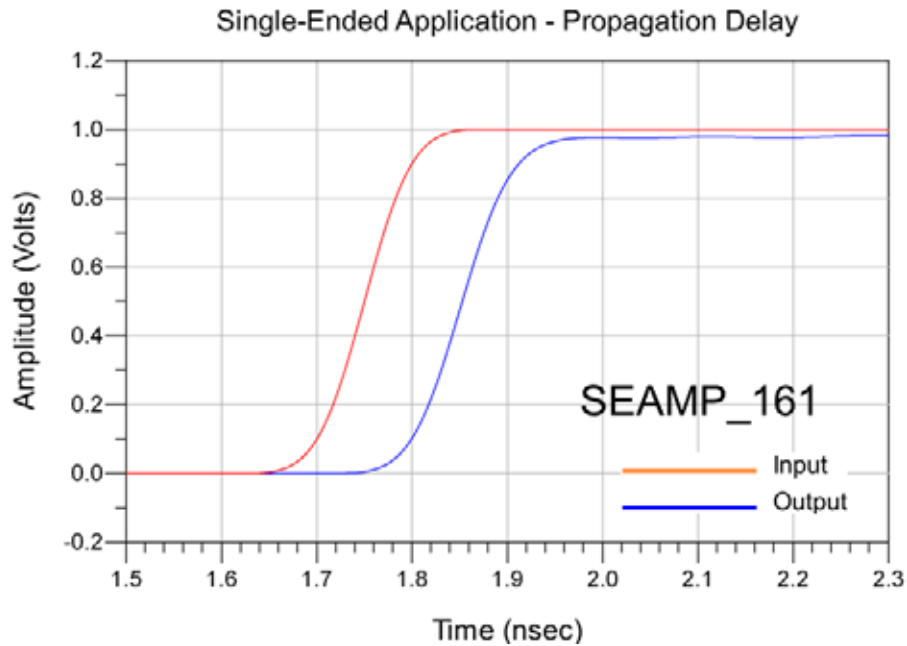


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

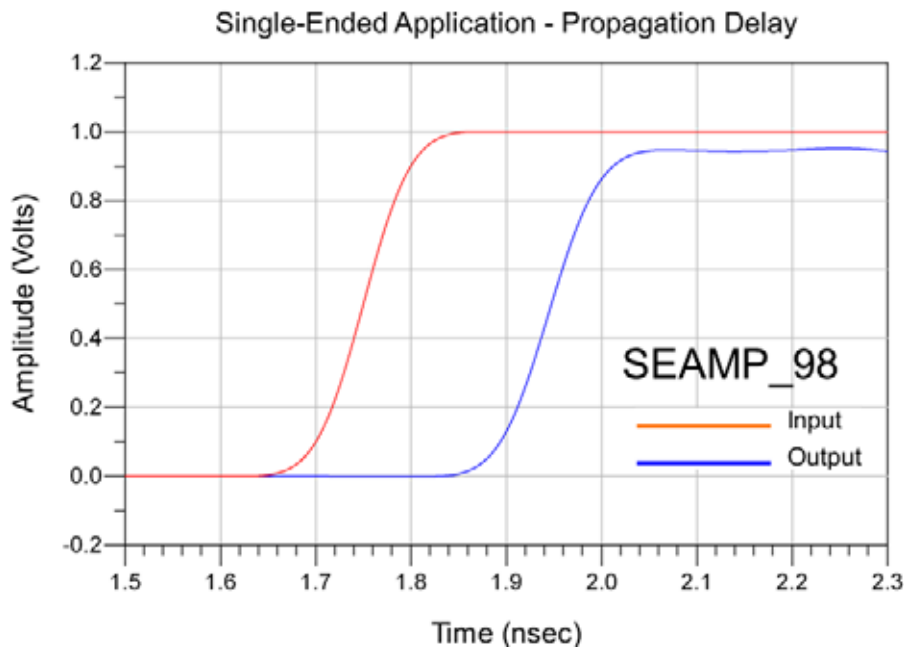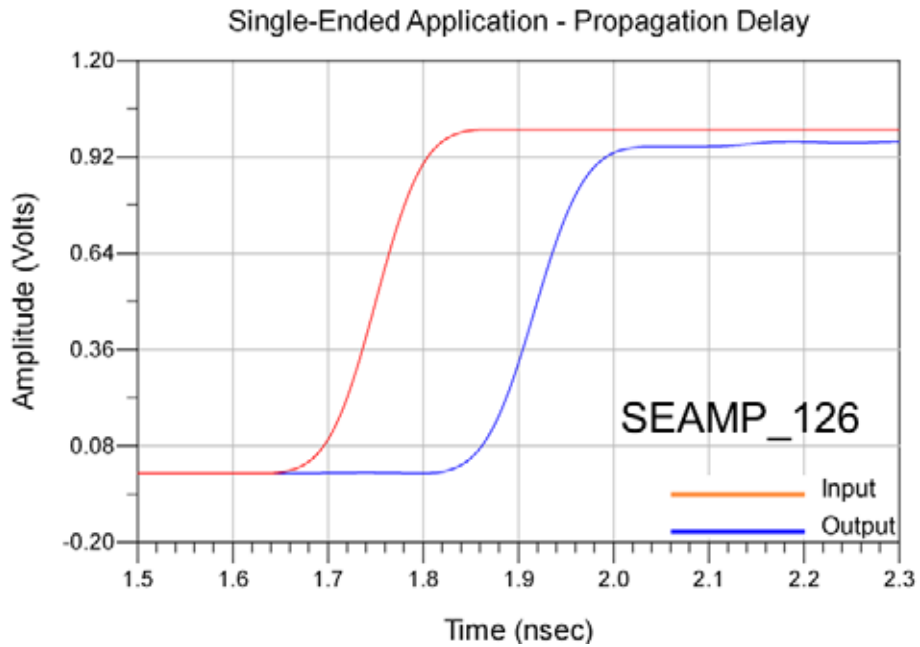

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

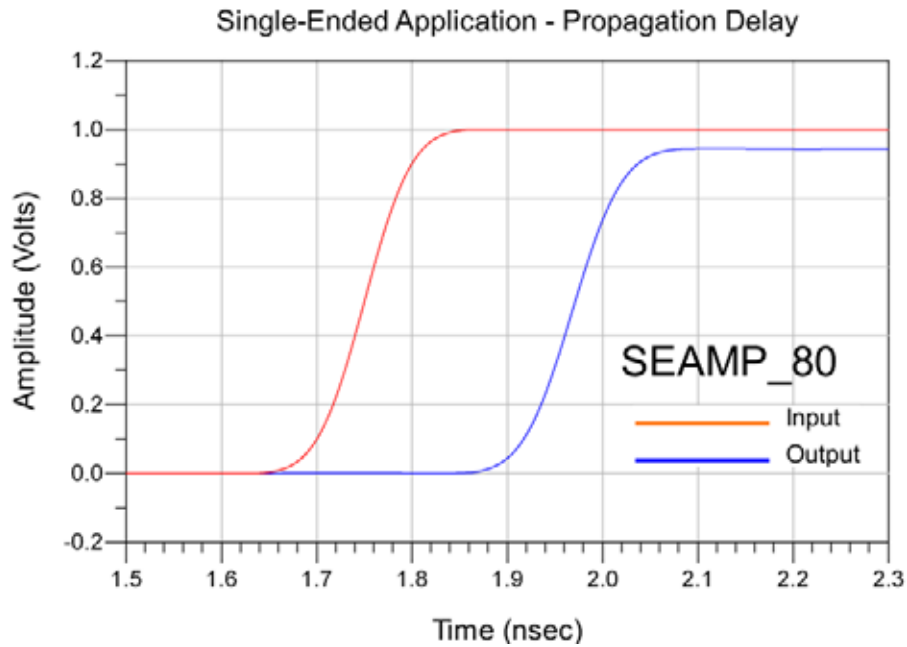

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


Single-Ended 2:1 S/G Pattern Application – Impedance

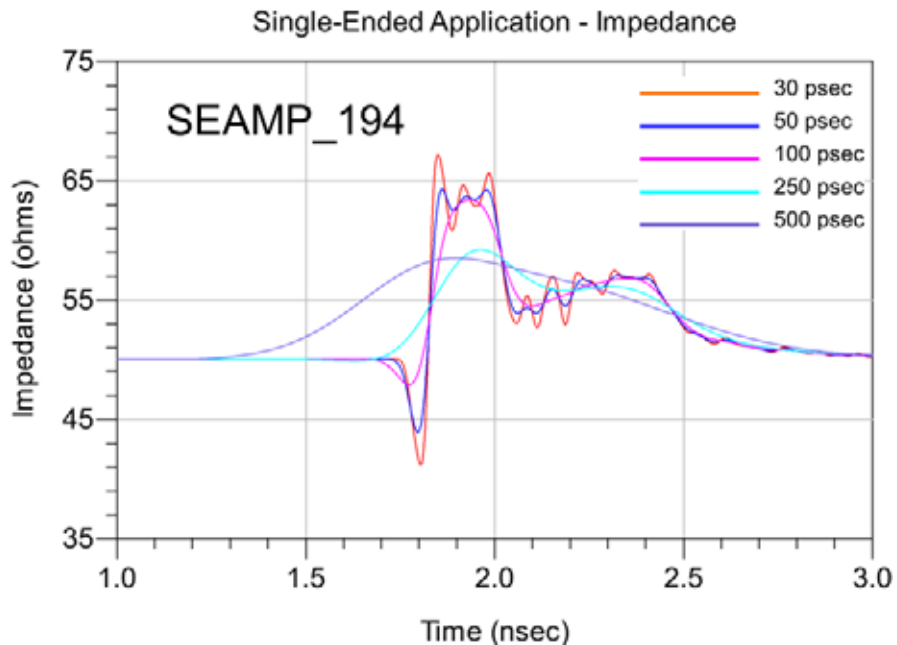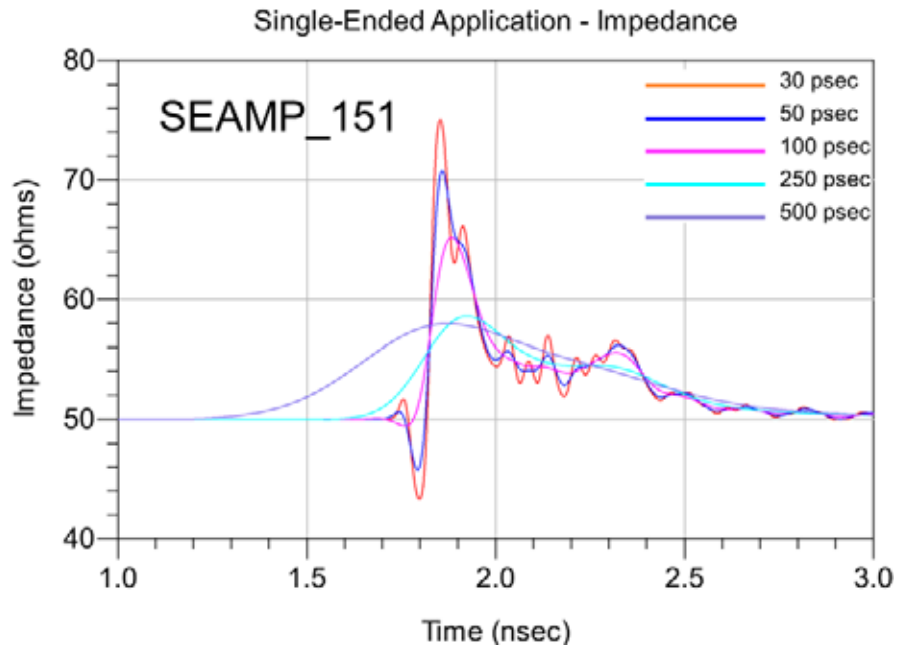

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

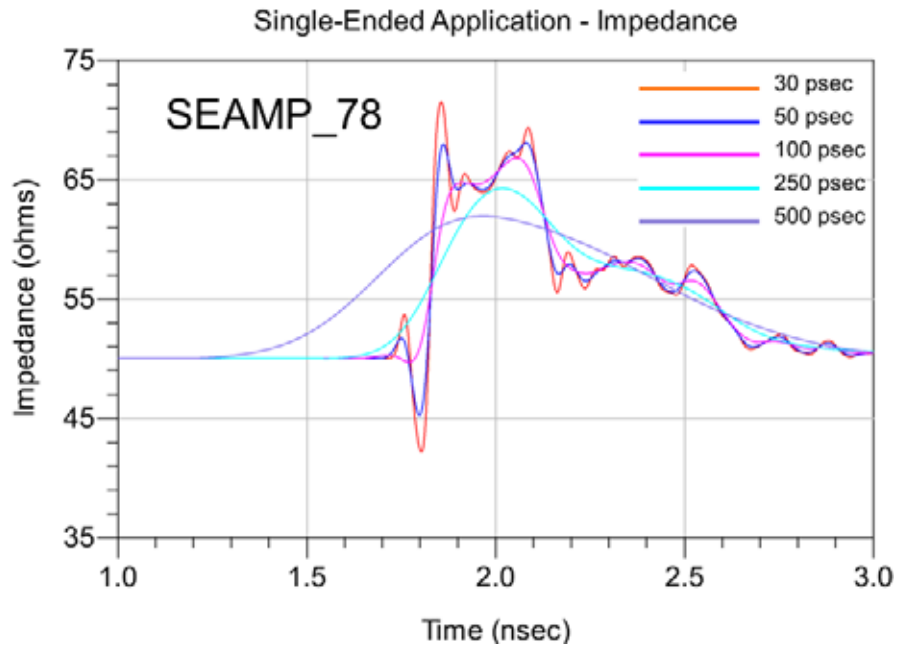
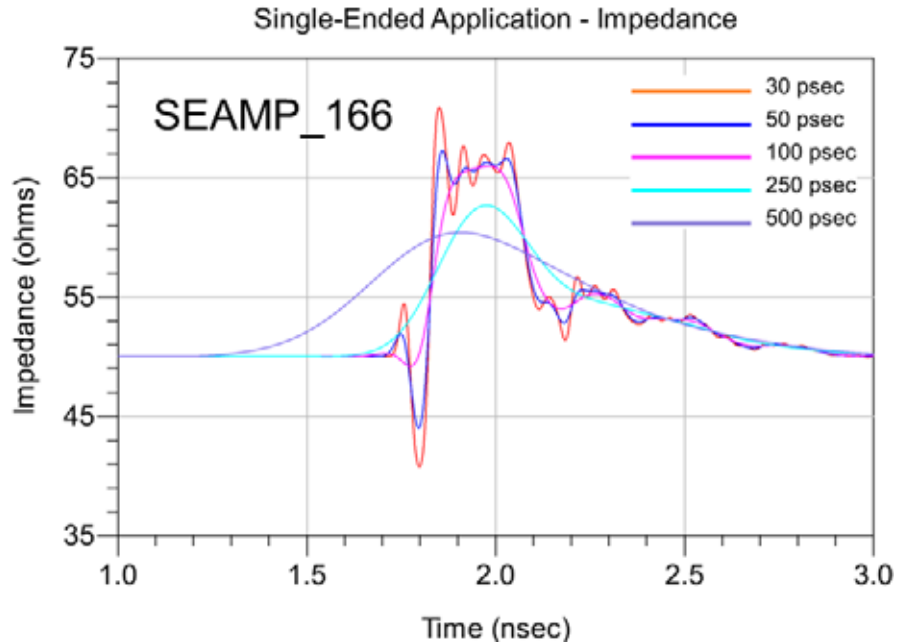


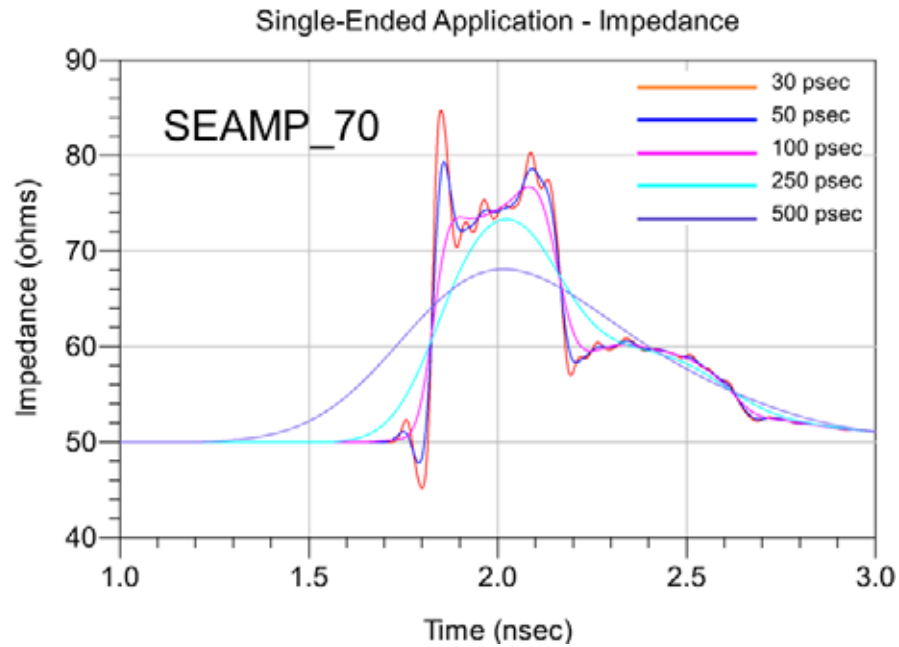Series: SEAMP/SEAF-RA**Description:** 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 S/G Pattern Application – Propagation Delay

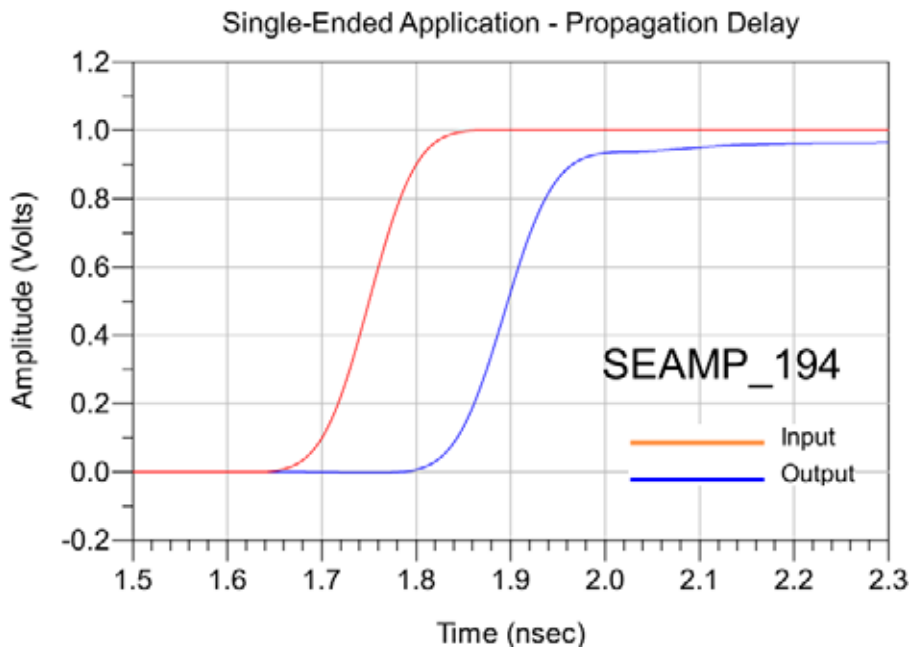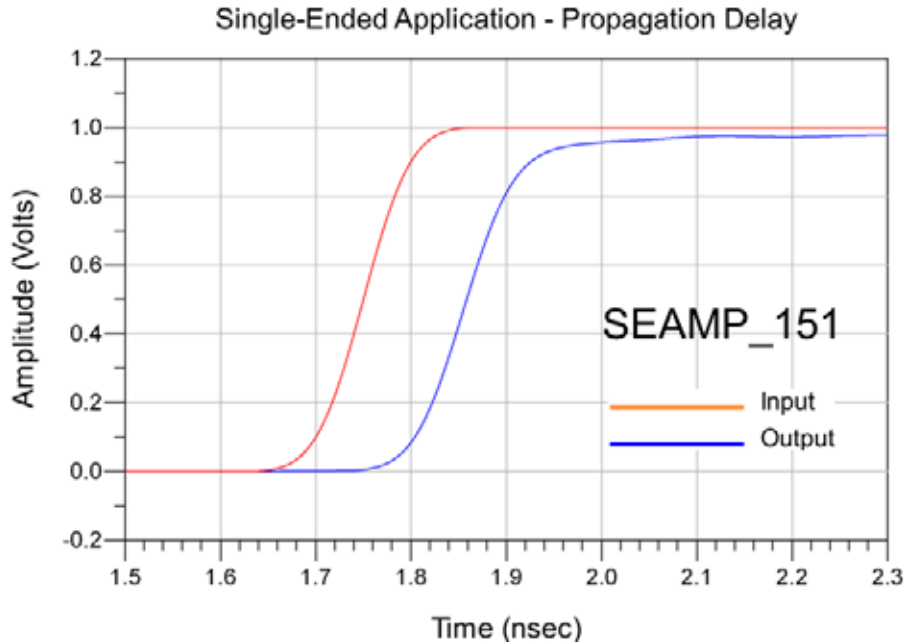


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

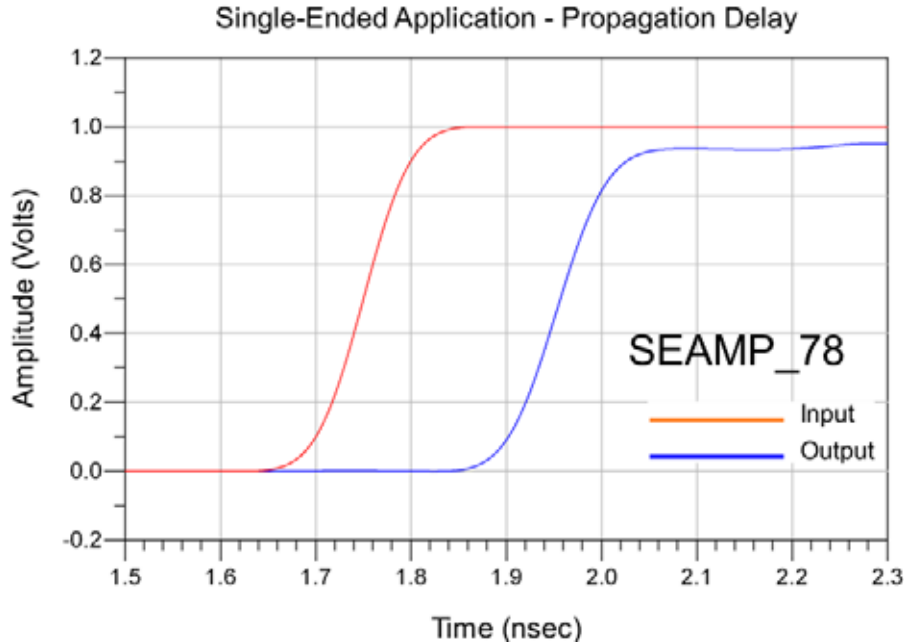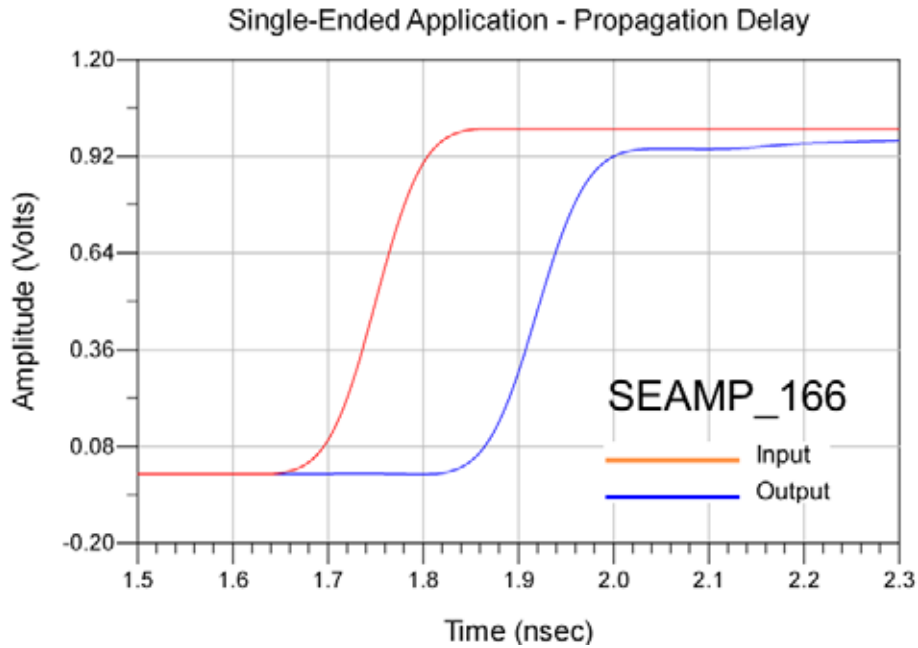

Series: SEAMP/SEAF-RA


Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

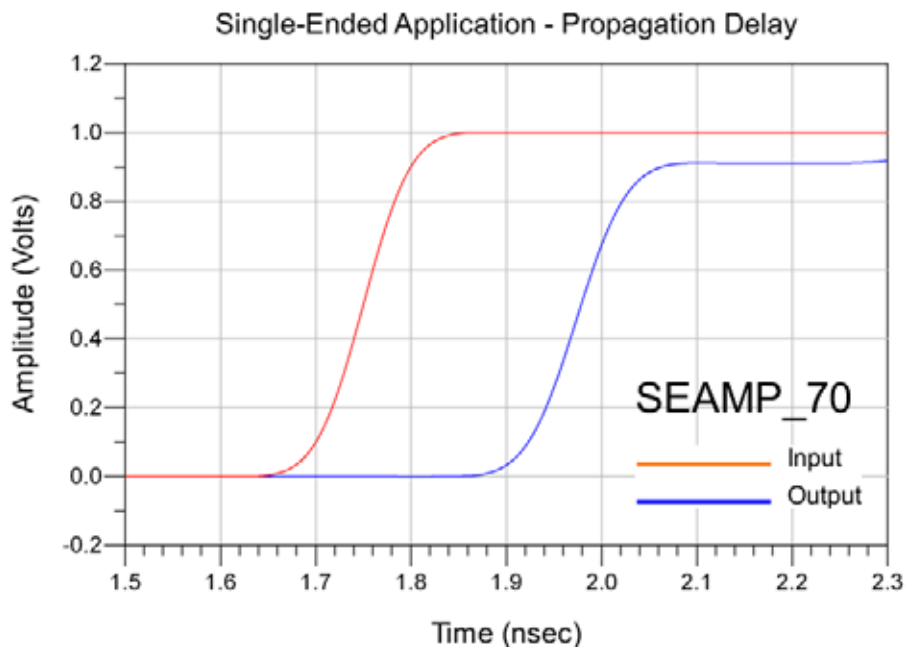


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_161_SEAMP_163

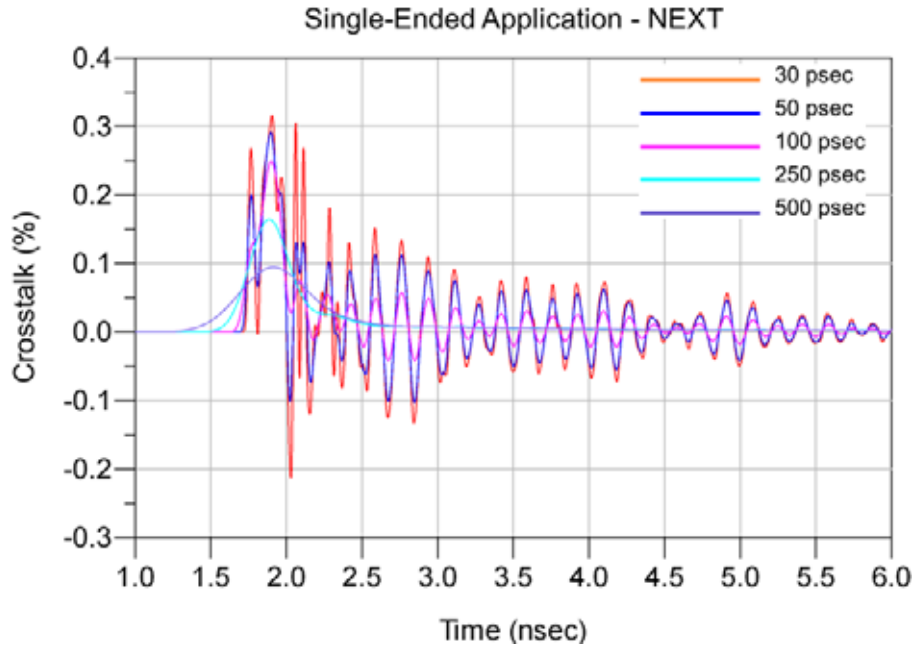


Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_161_SEAF-RA_163

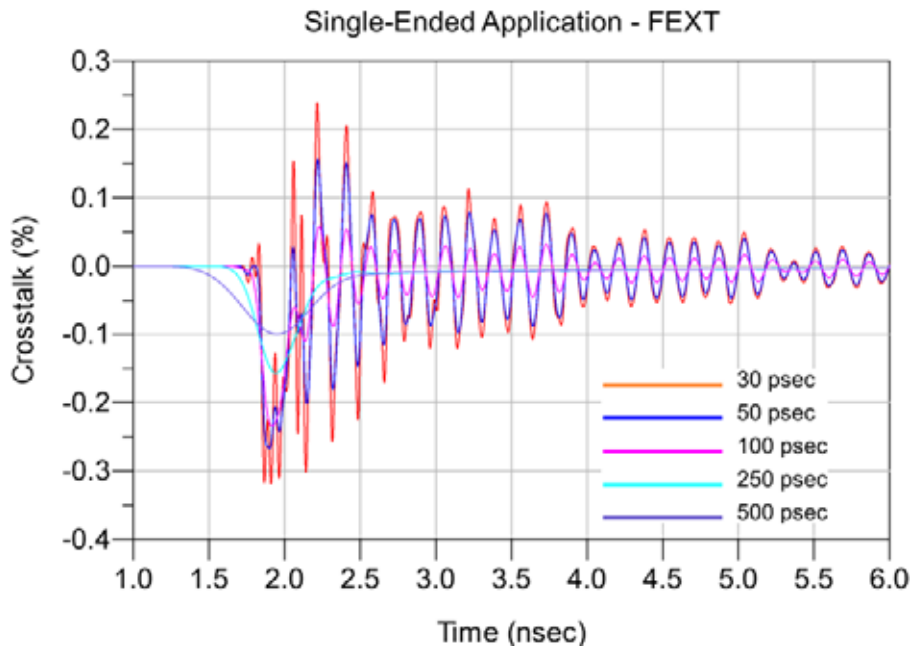


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_163_SEAMP_183

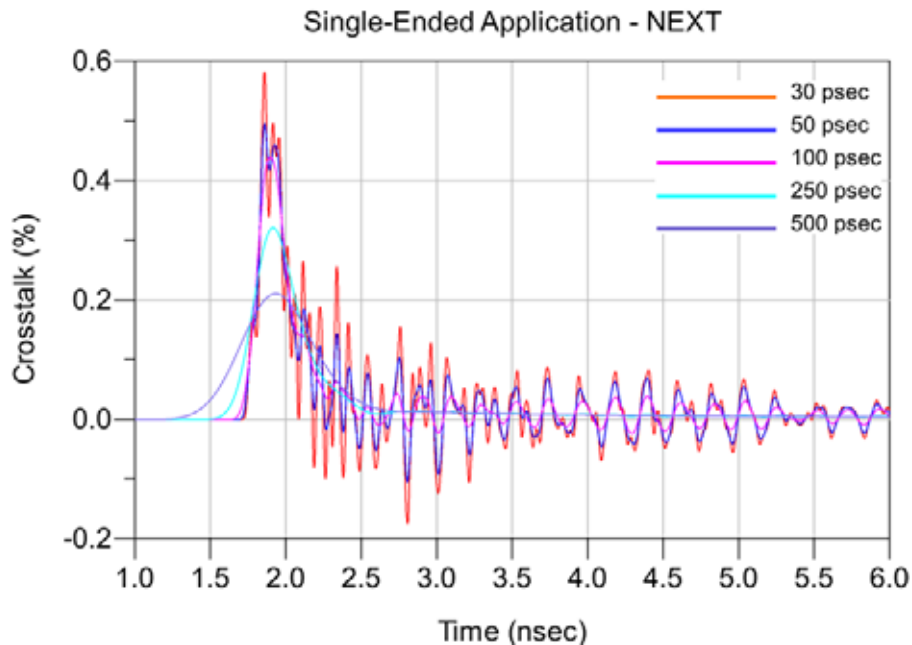


Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_163_SEAF-RA_183

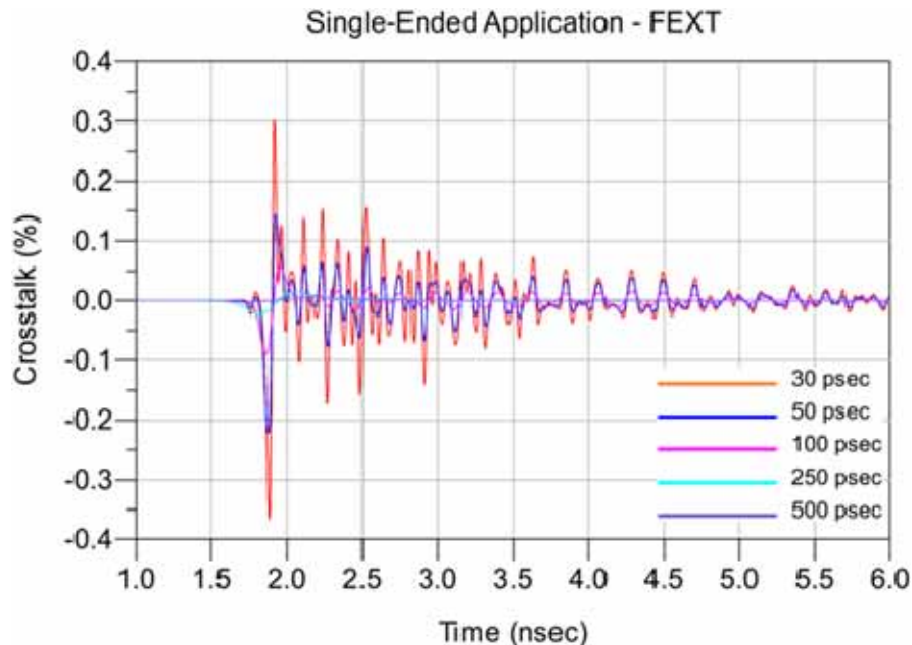


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_124_SEAMP_126

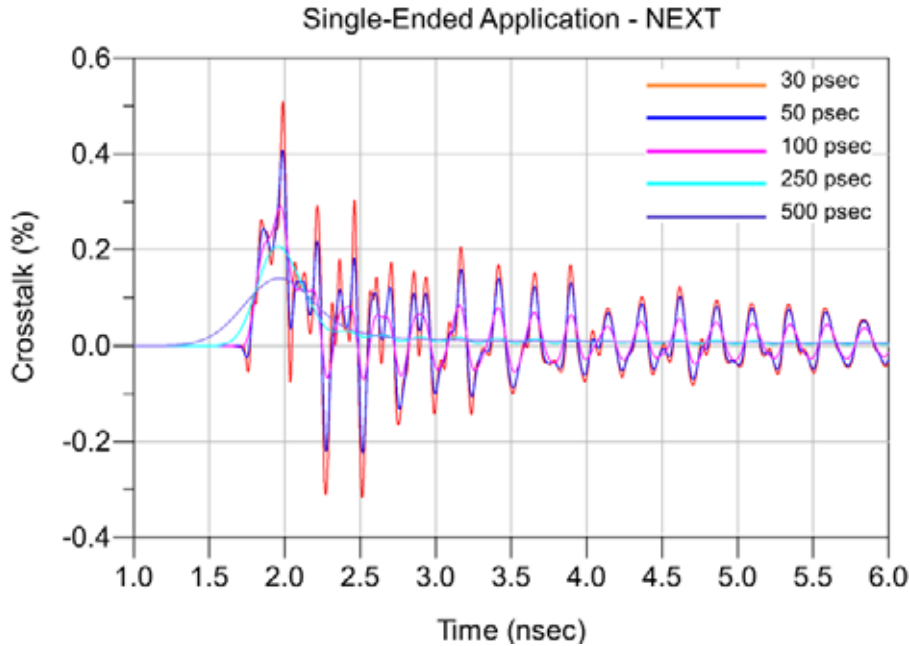


Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_124_SEAF-RA_126

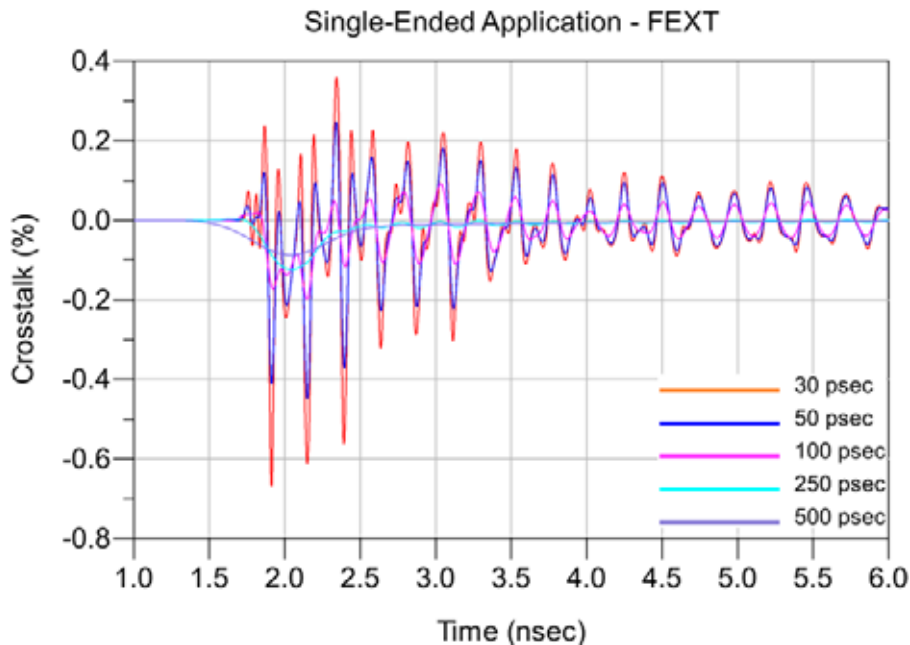


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_78_SEAMP_98

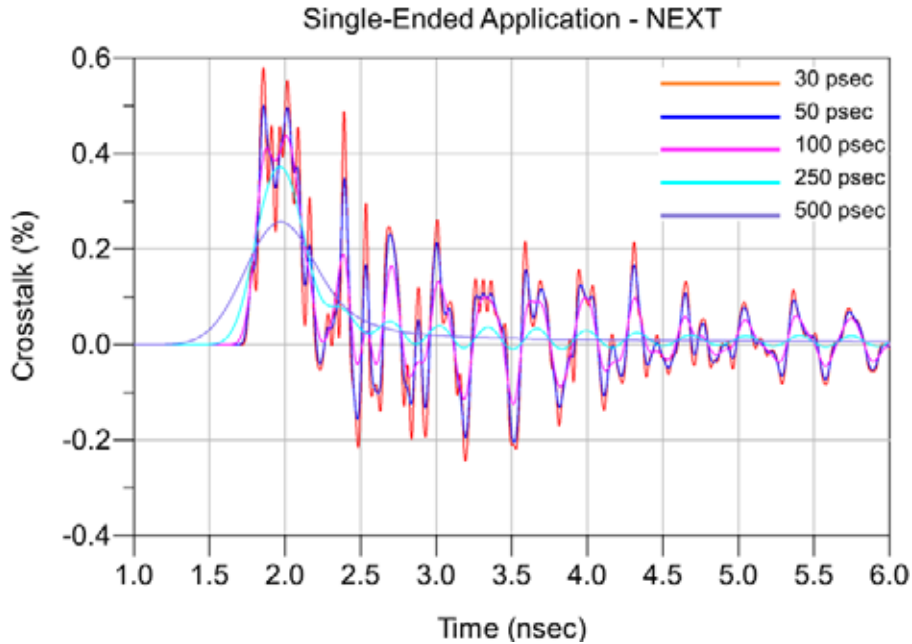


Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_78_SEAF-RA_98

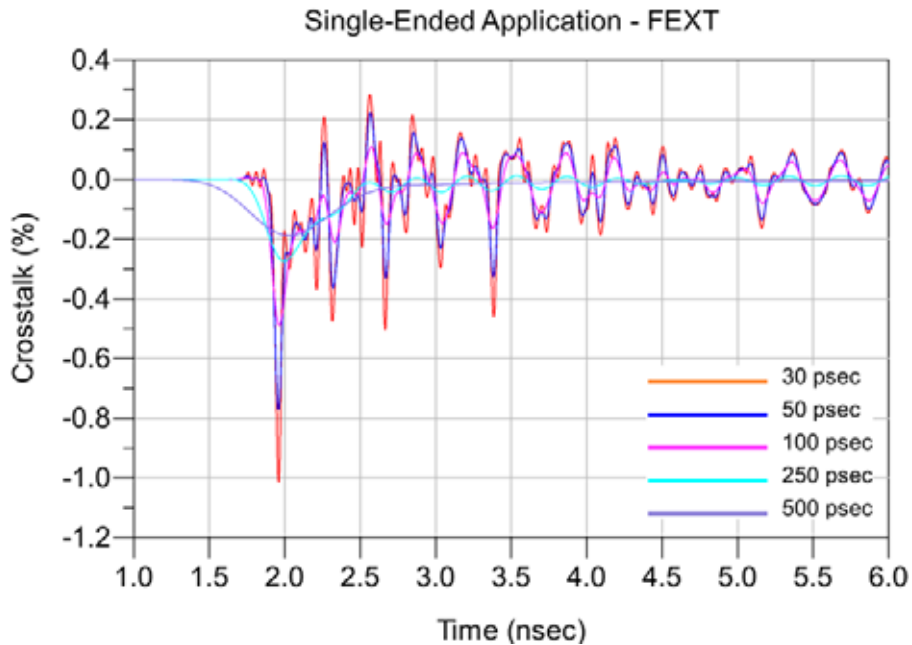


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 1:1 S/G Pattern Application – NEXT, SEAMP_78_SEAMP_80

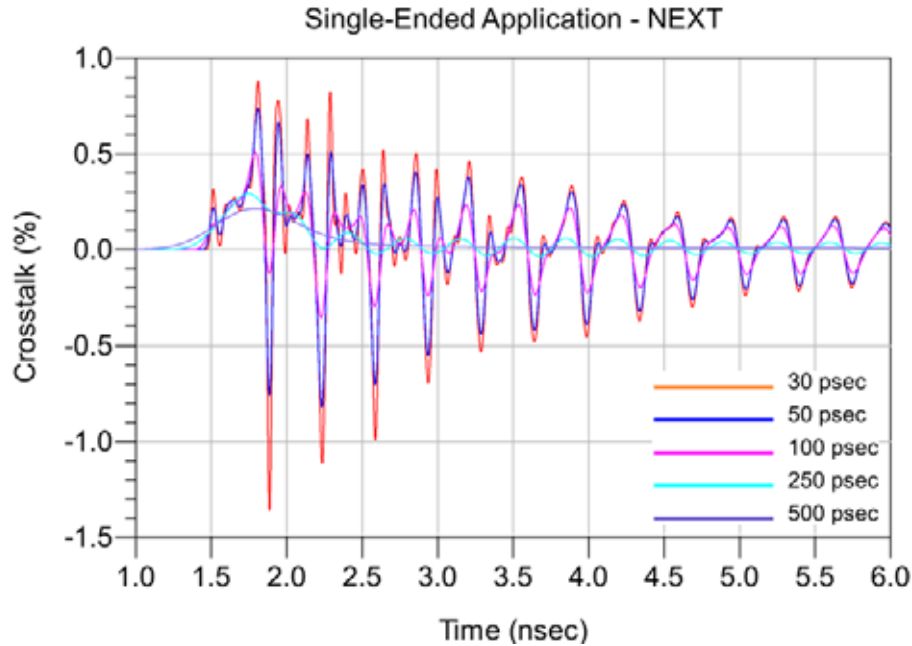


Single-Ended 1:1 S/G Pattern Application – FEXT, SEAMP_78_SEAF-RA_80

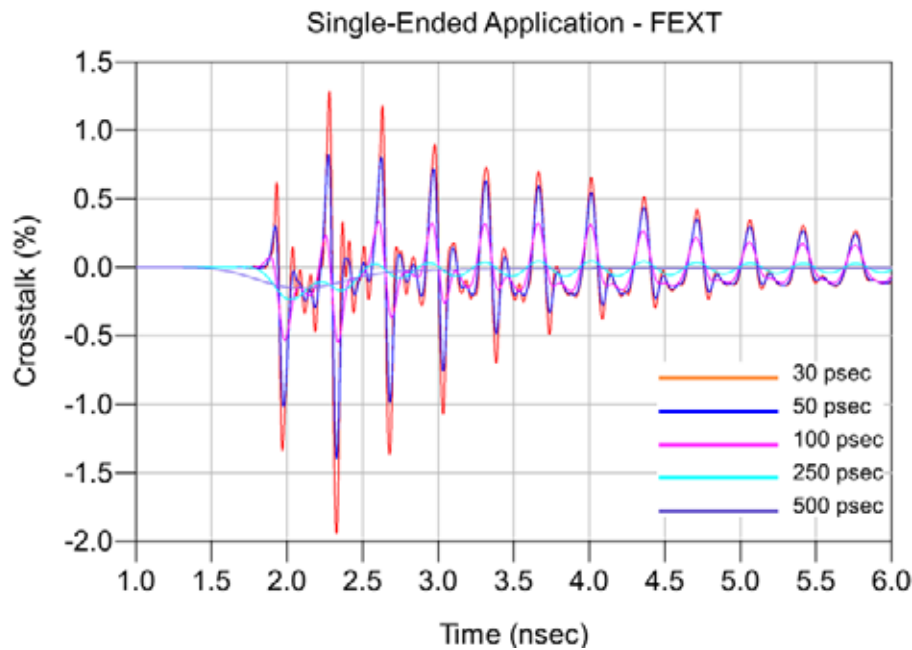


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_151_SEAMP_161

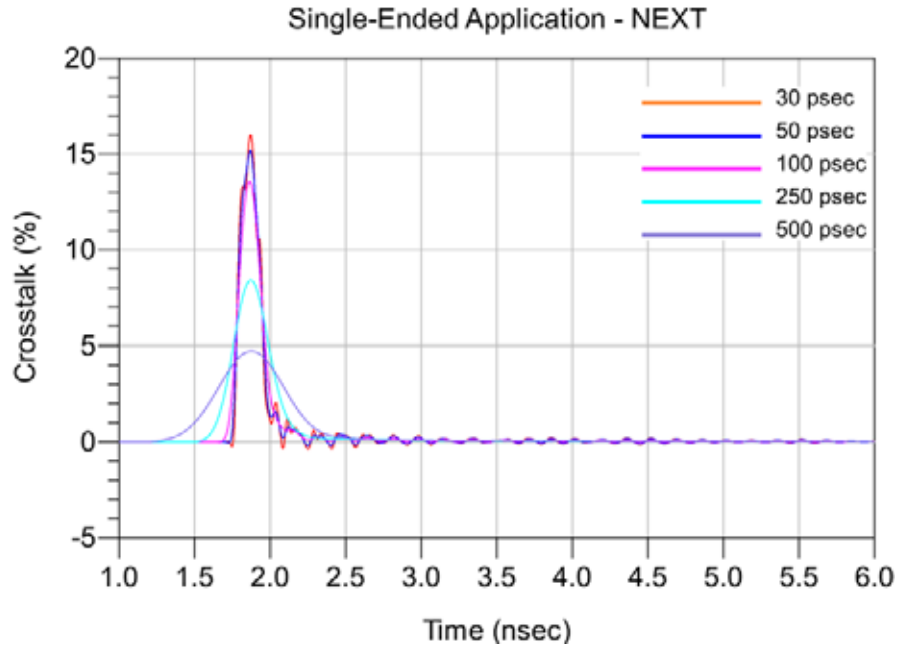


Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_151_SEAF-RA_161

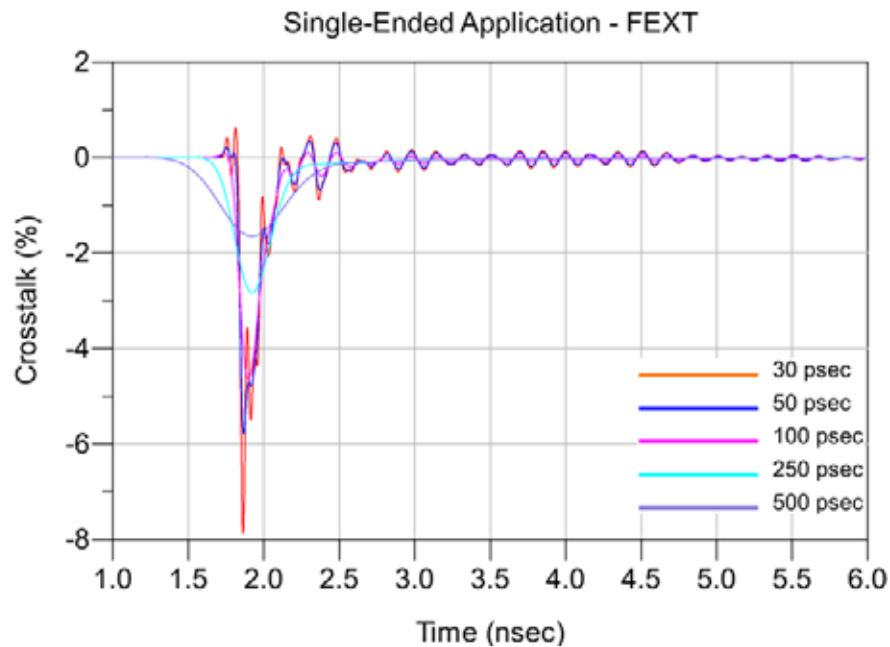


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_184_SEAMP_194

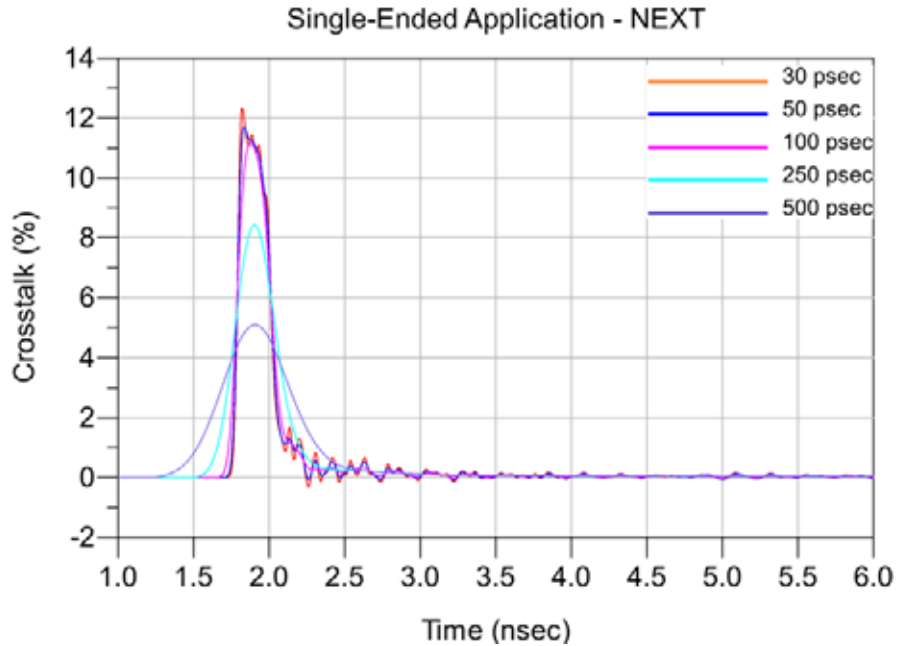


Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_184_SEAF-RA_194

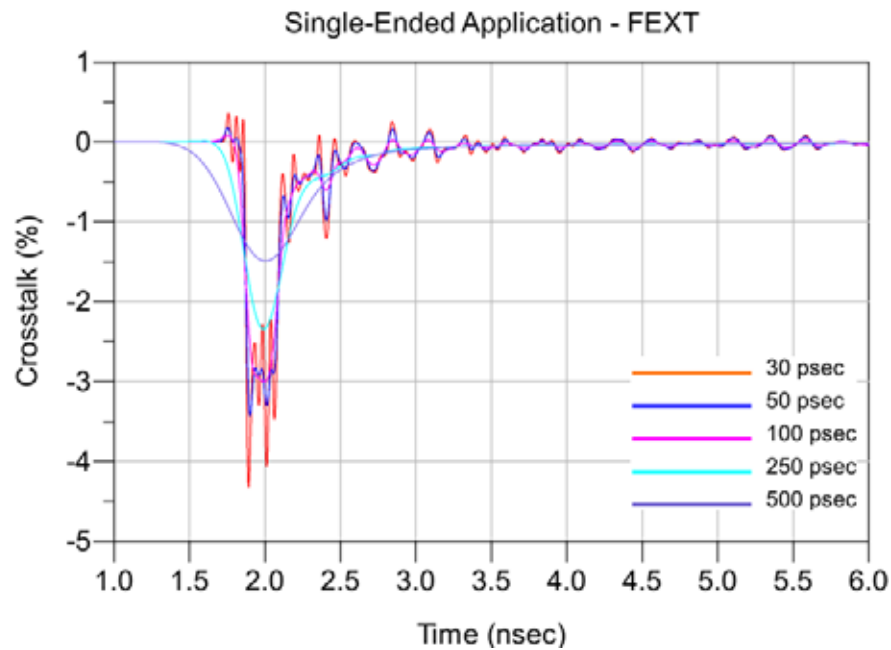


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_155_SEAMP_156

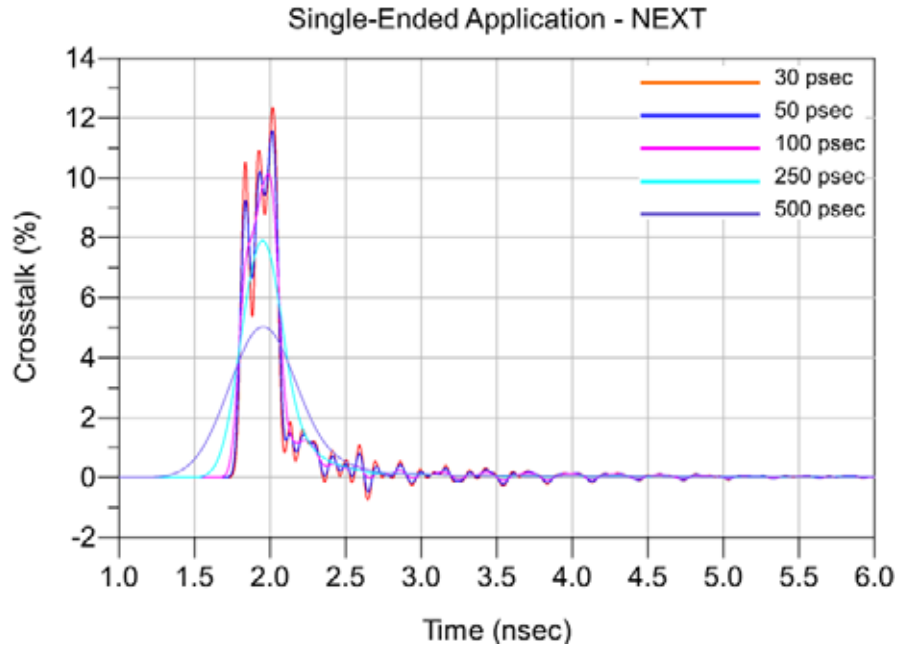


Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_155_SEAF-RA_156

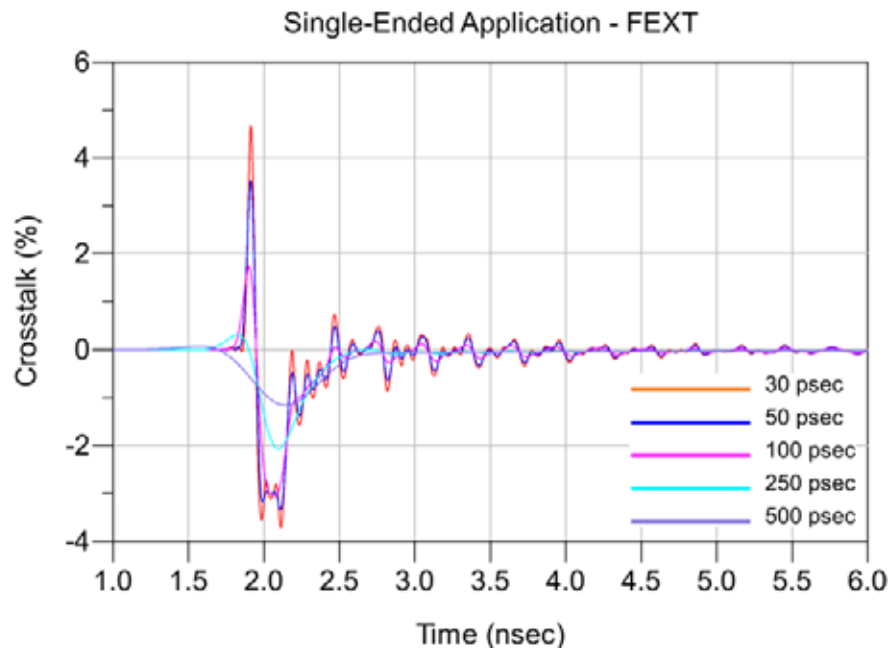


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_78_SEAMP_88

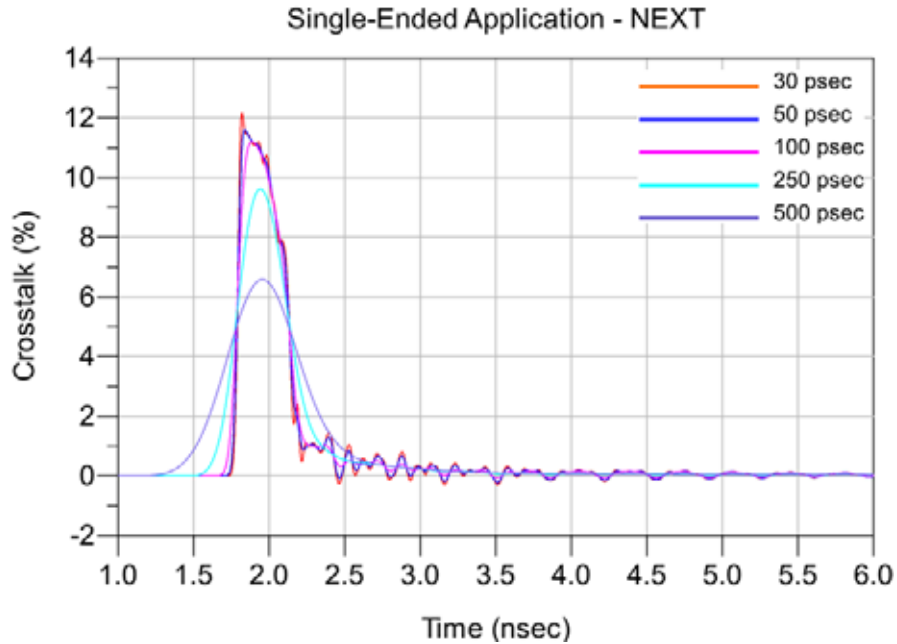


Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_78_SEAF-RA_88

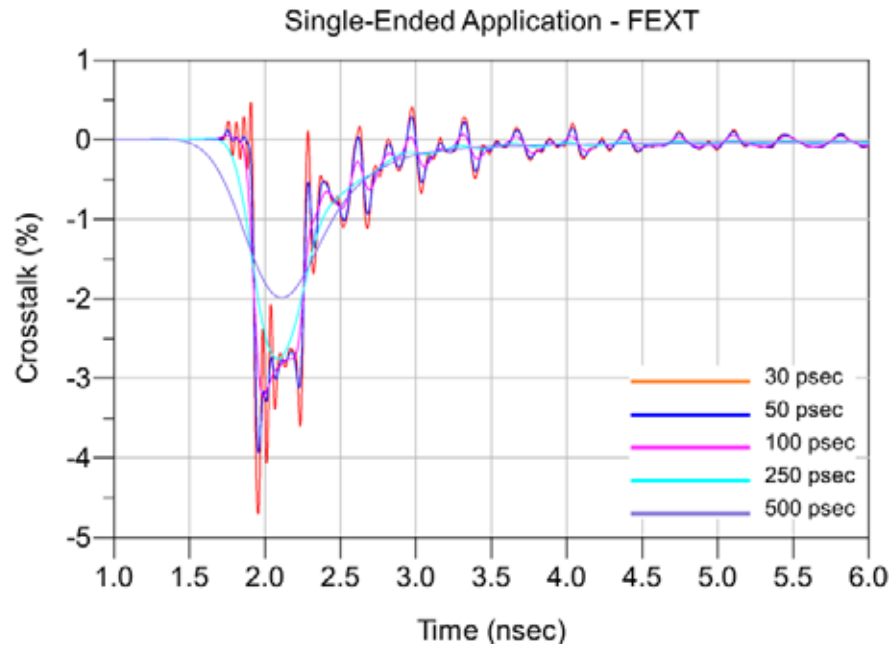


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Single-Ended 2:1 S/G Pattern Application – NEXT, SEAMP_78_SEAMP_80

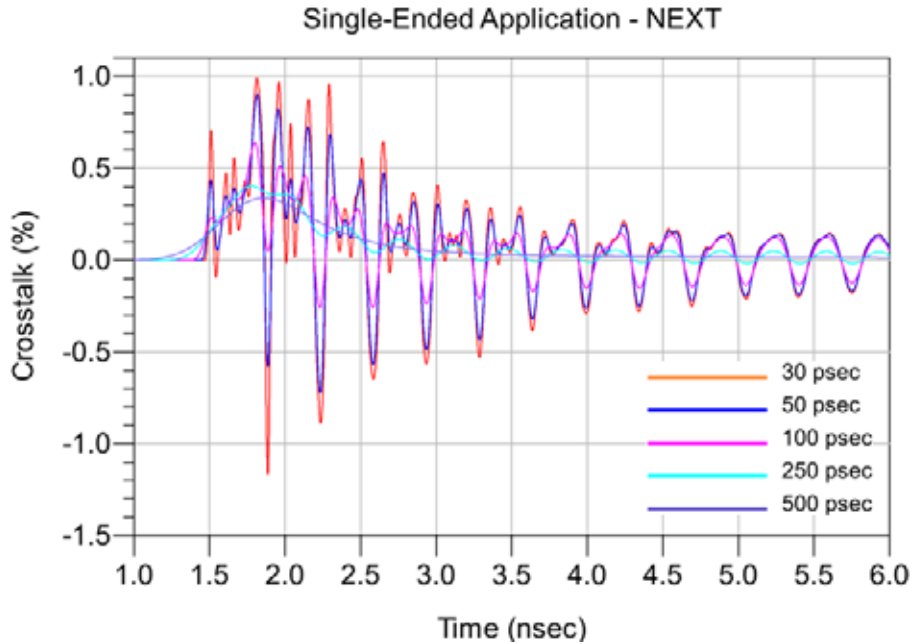


Single-Ended 2:1 S/G Pattern Application – FEXT, SEAMP_78_SEAF-RA_80

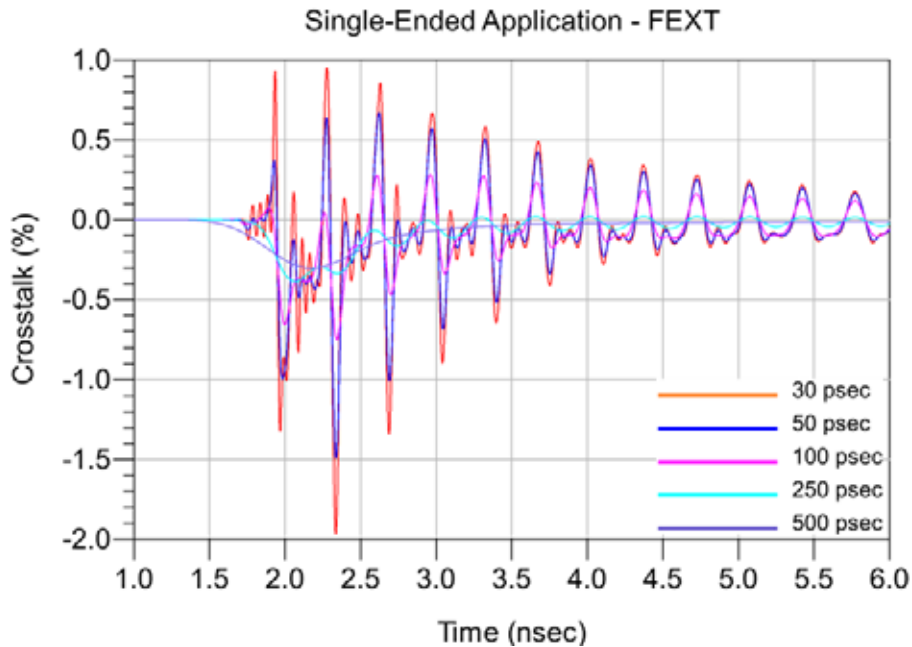


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Application – Input Pulse


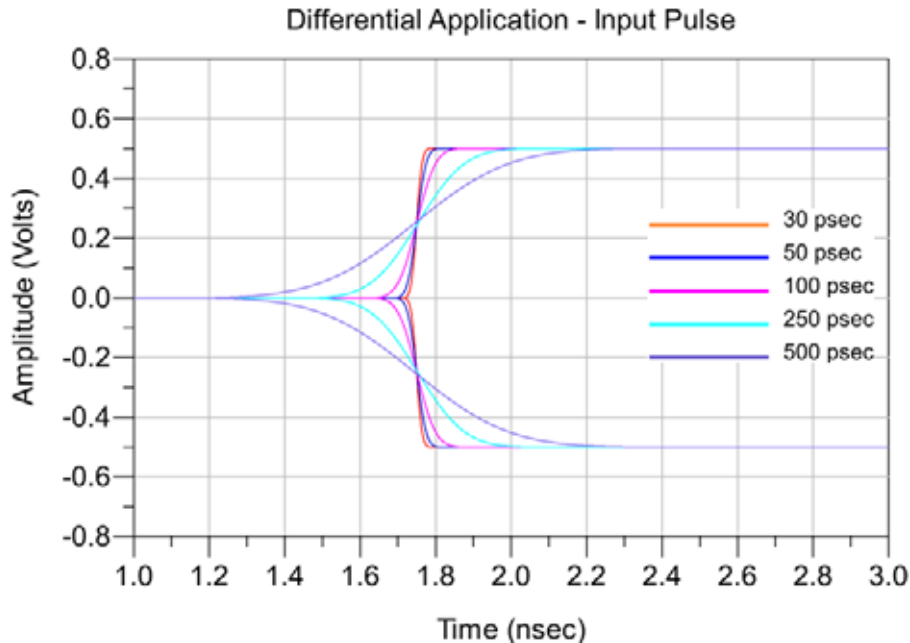


Differential Optimal Horizontal Application – Impedance

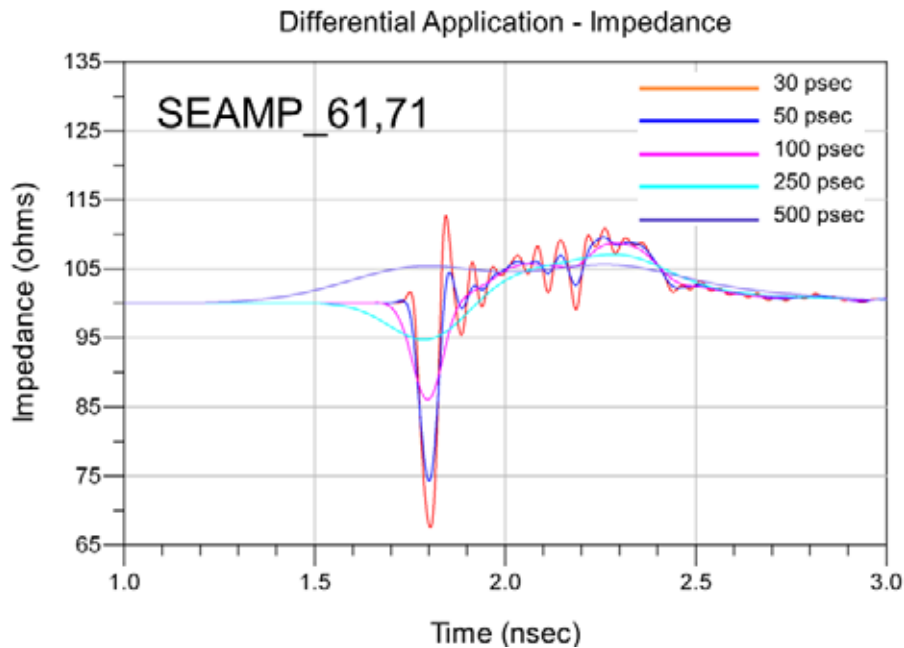



Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

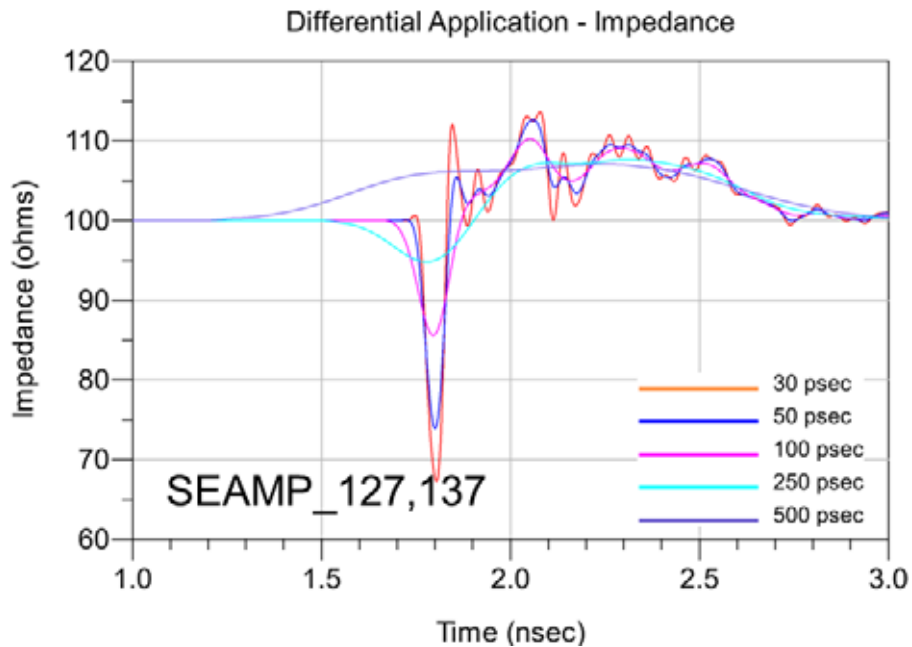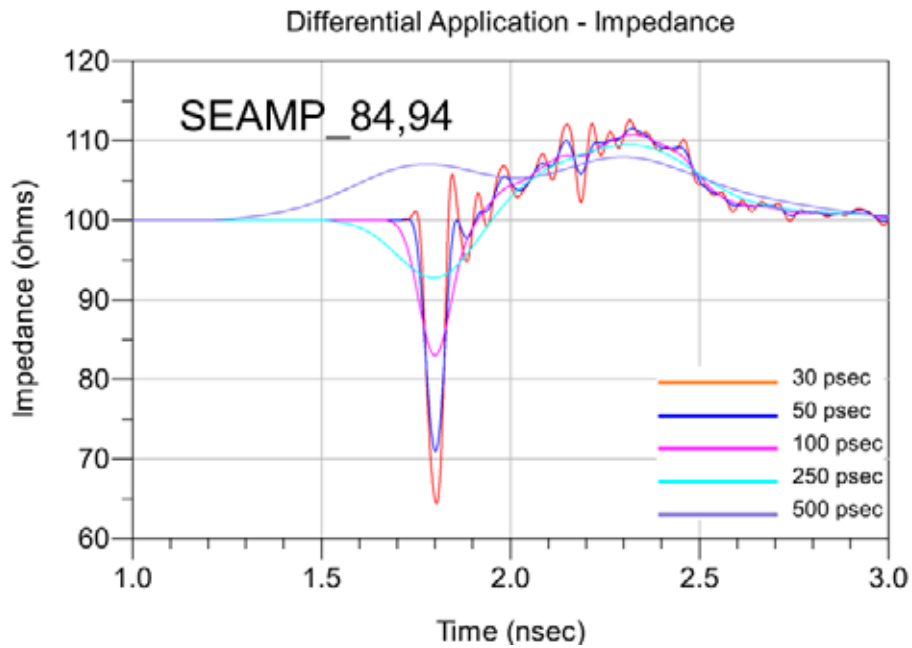

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

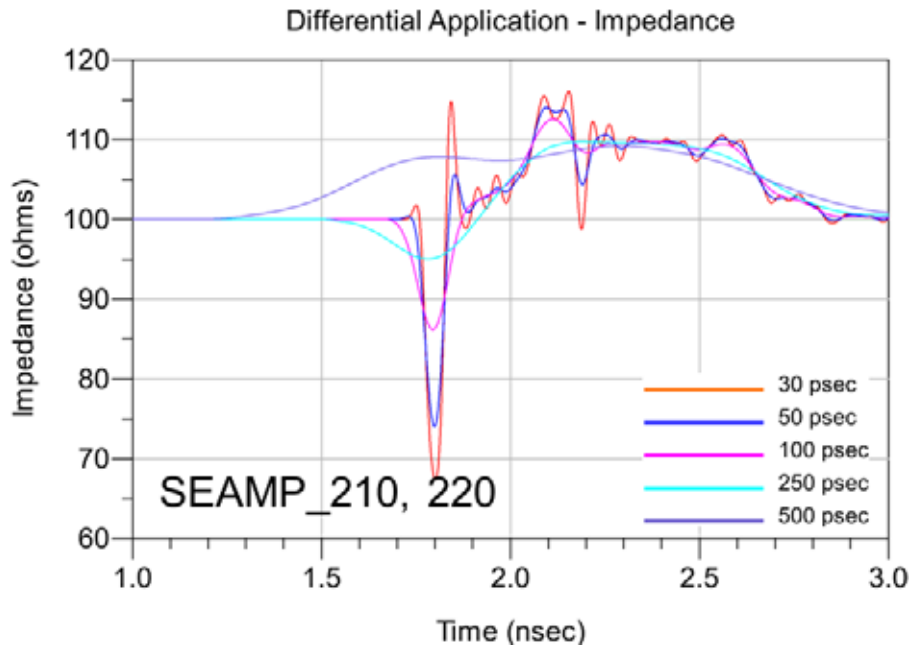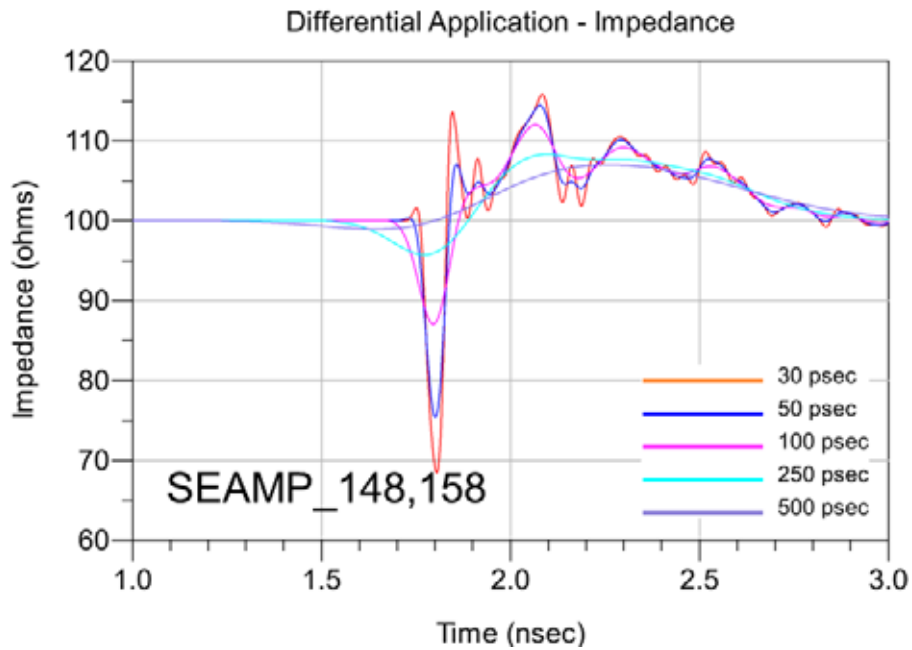

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Horizontal Application – Propagation Delay

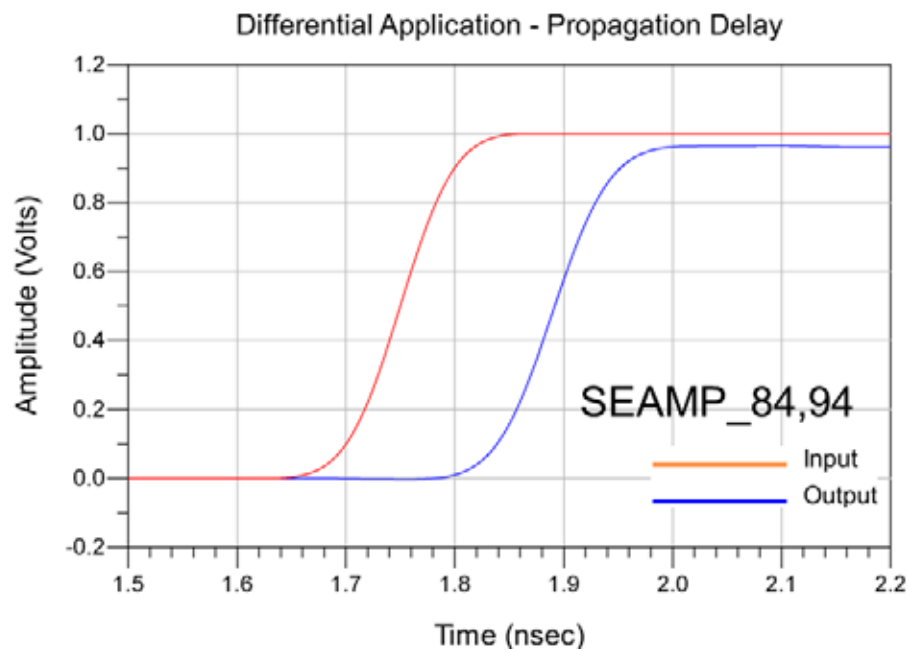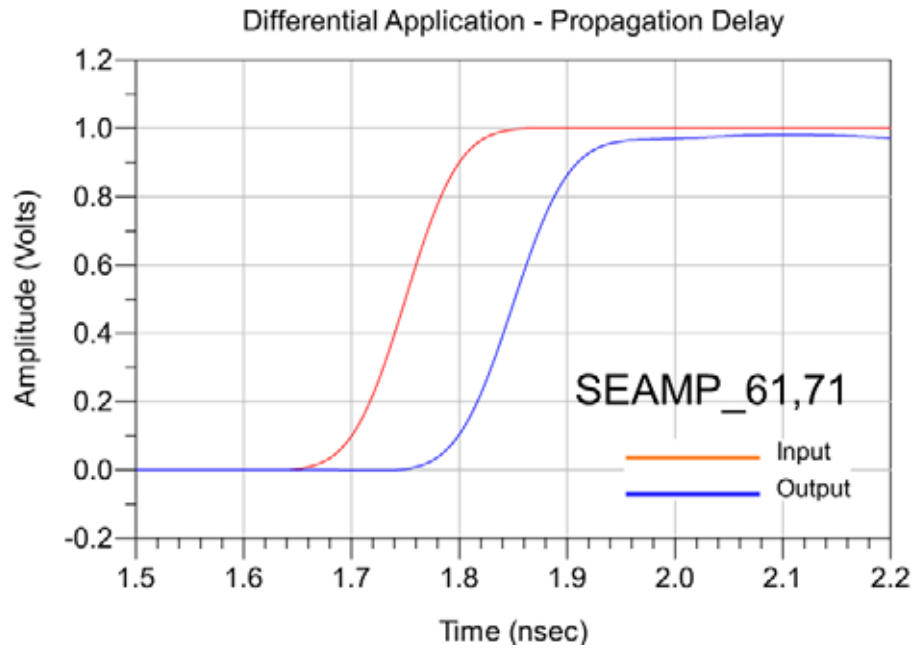


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

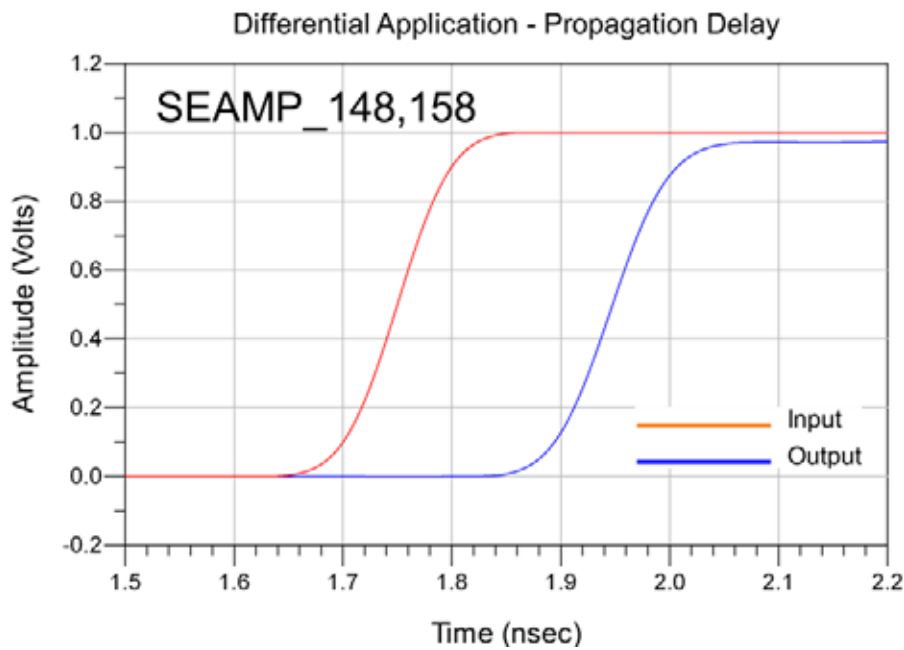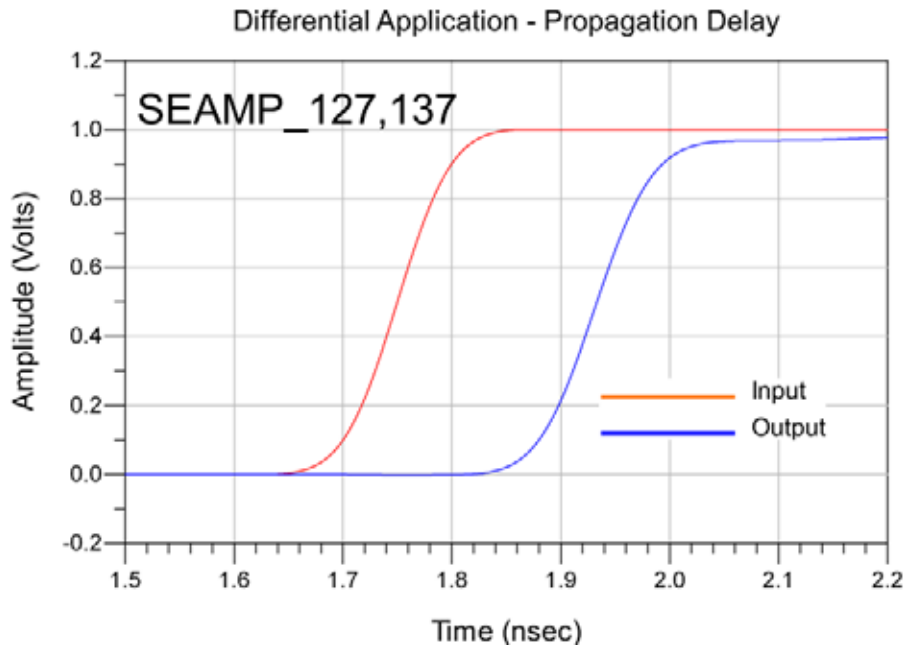

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

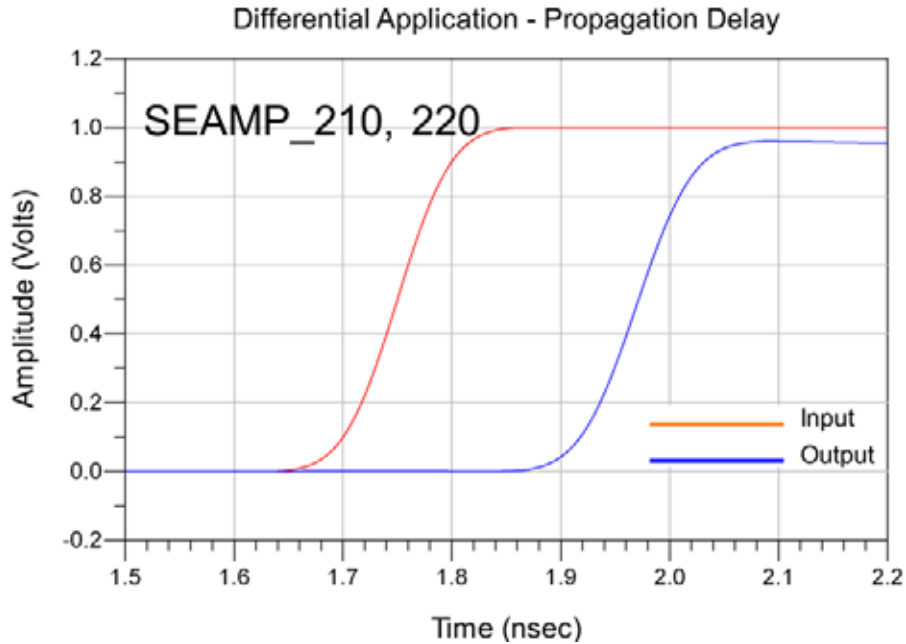

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


Differential Optimal Vertical Application – Impedance

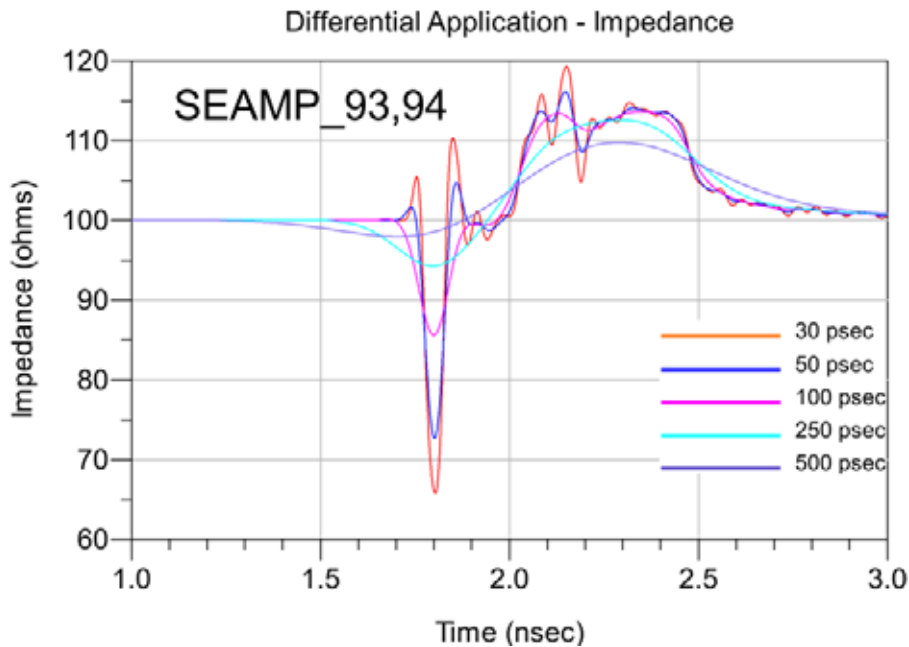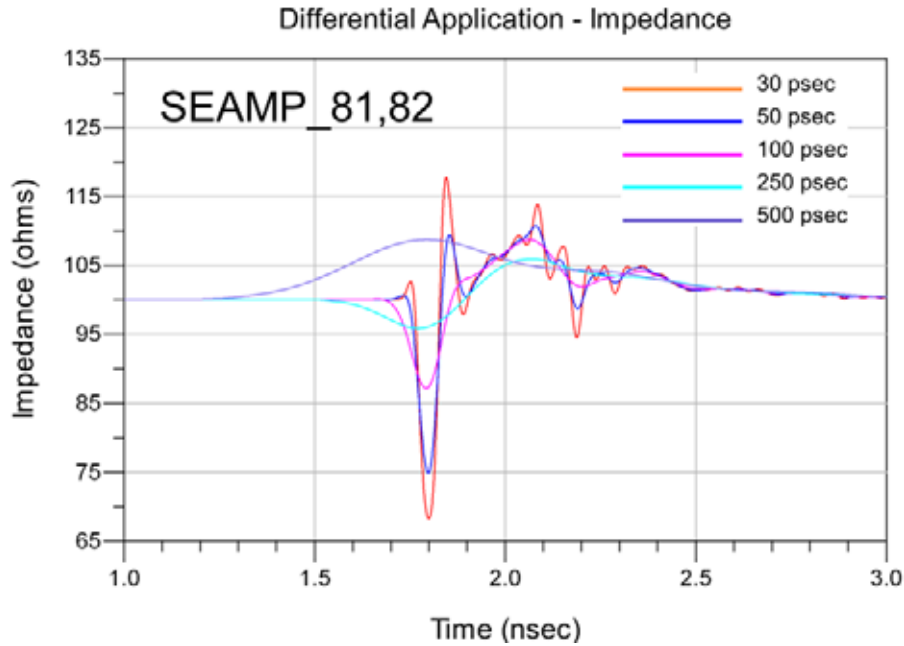

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

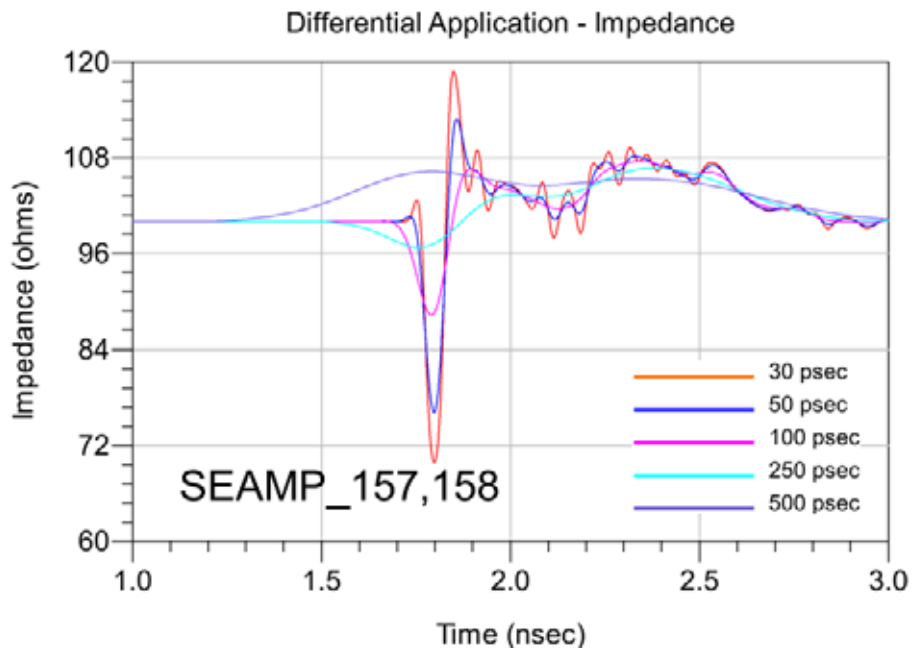
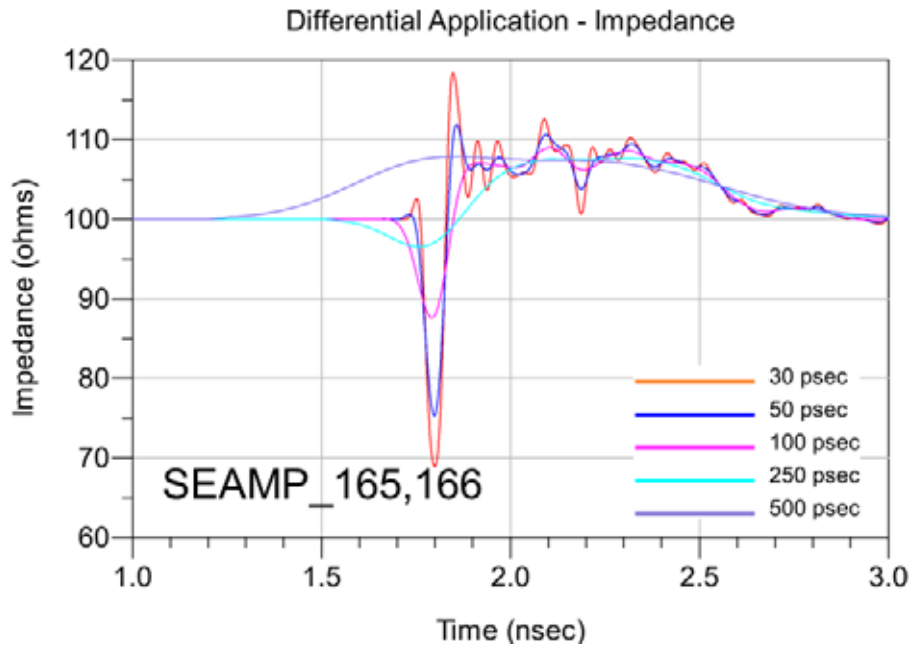


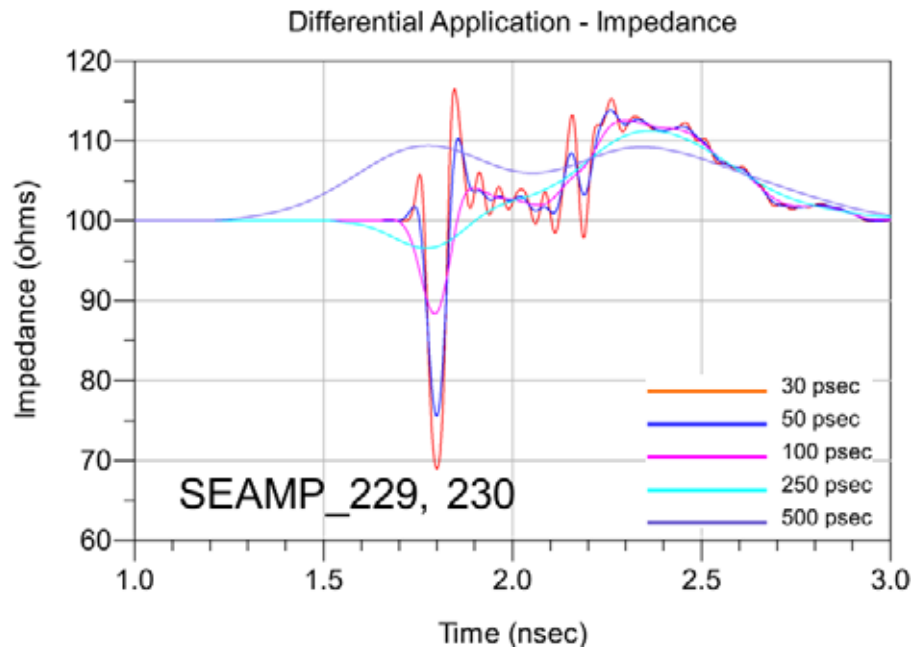Series: SEAMP/SEAF-RA**Description:** 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential Optimal Vertical Application – Propagation Delay

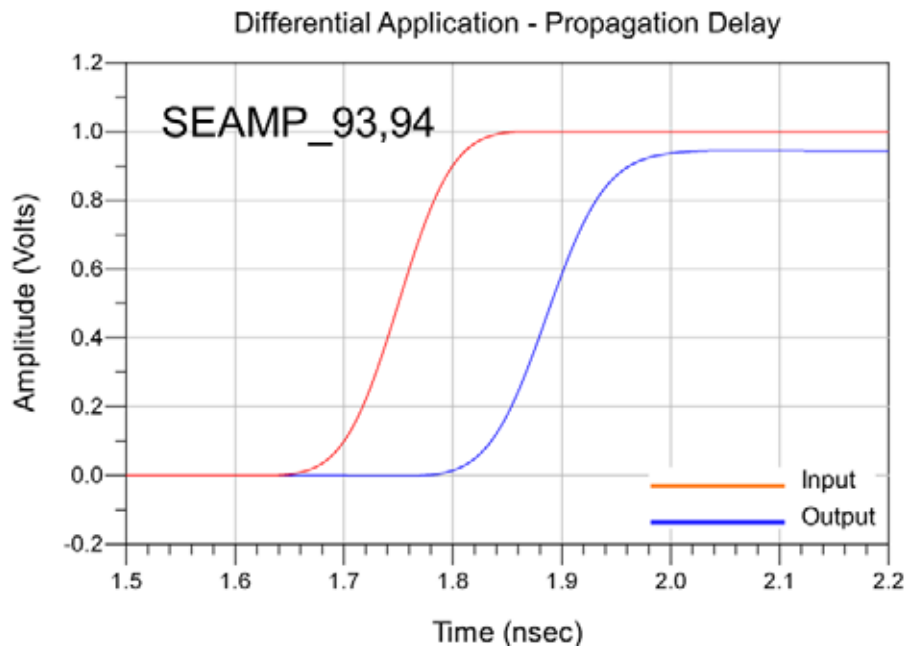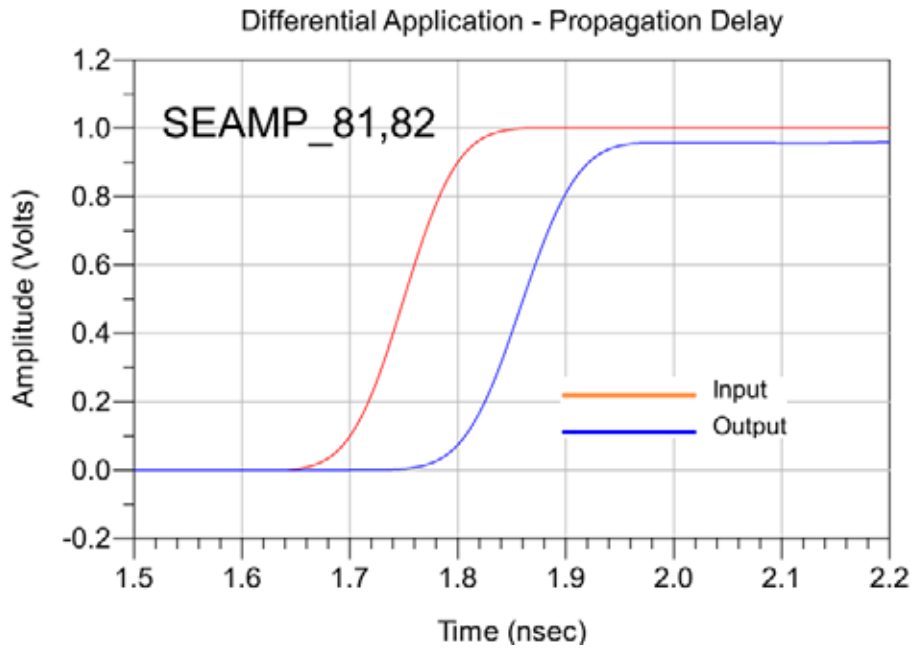


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

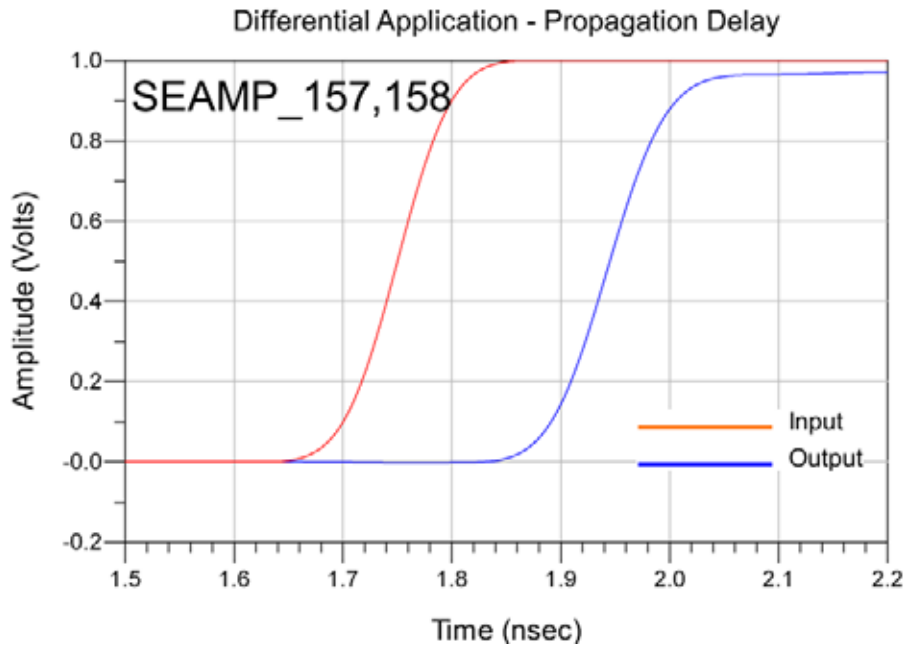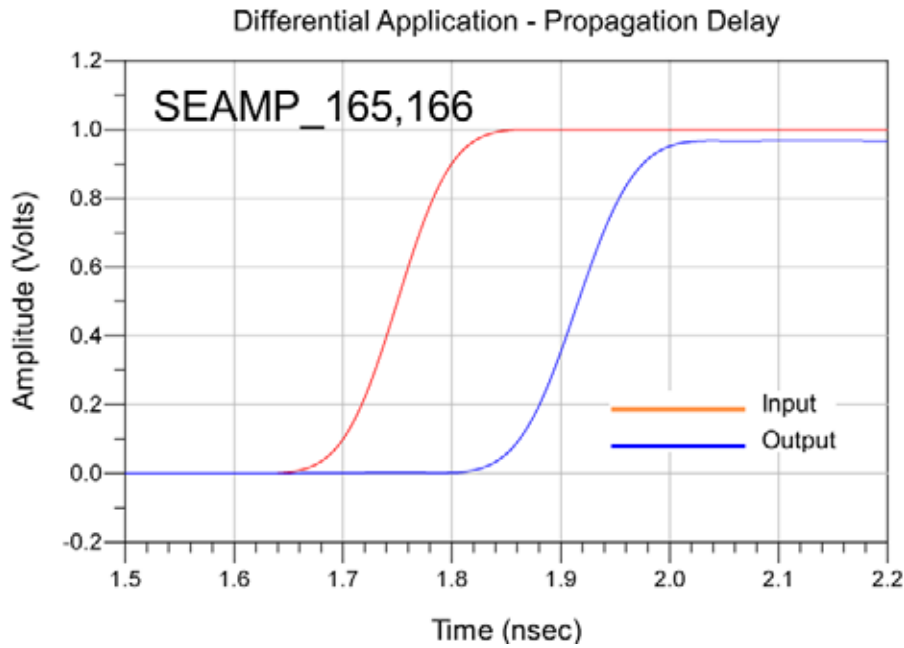

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

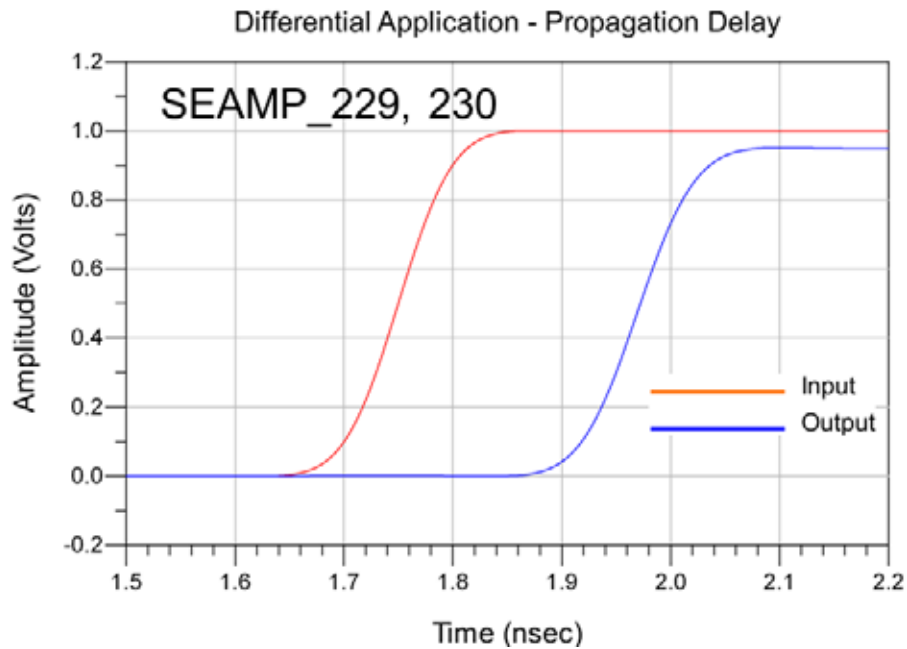

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


Differential High Density Vertical Application – Impedance

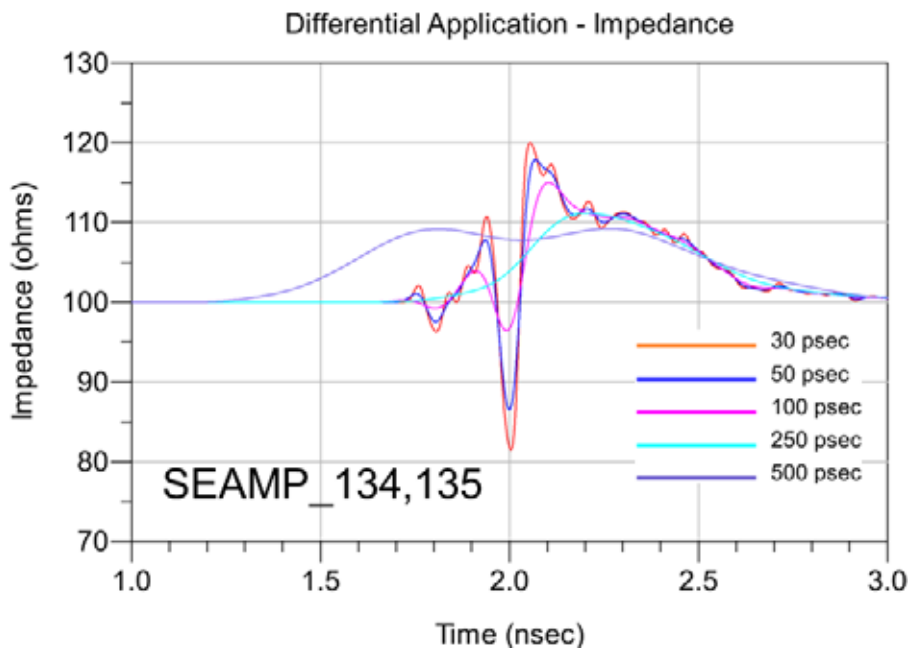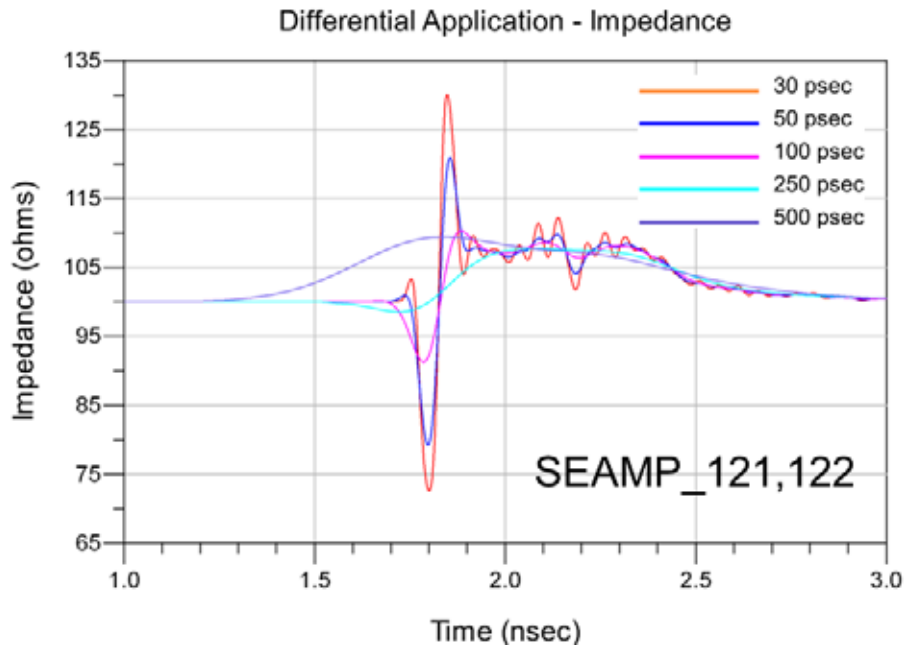

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

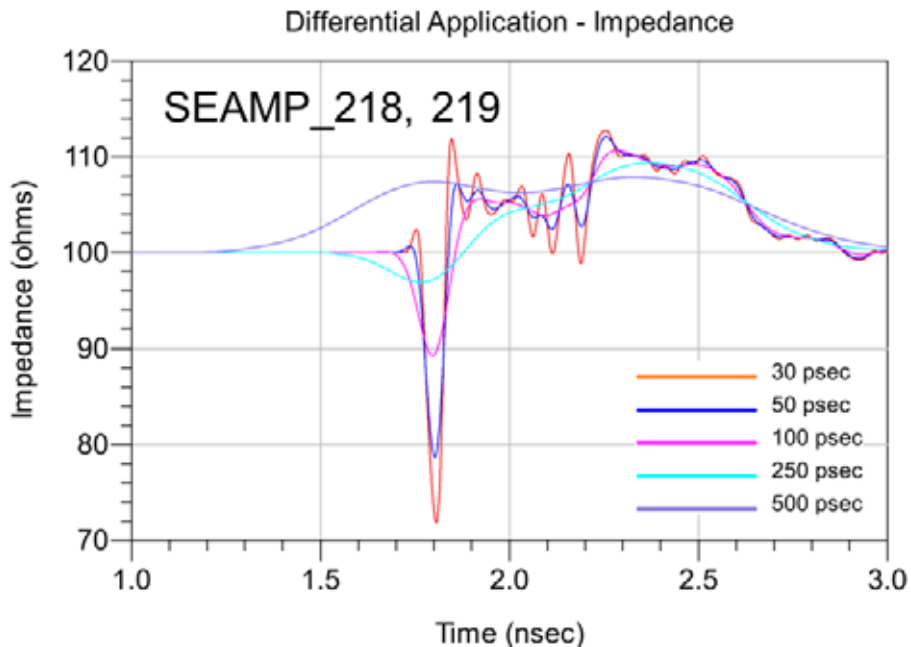
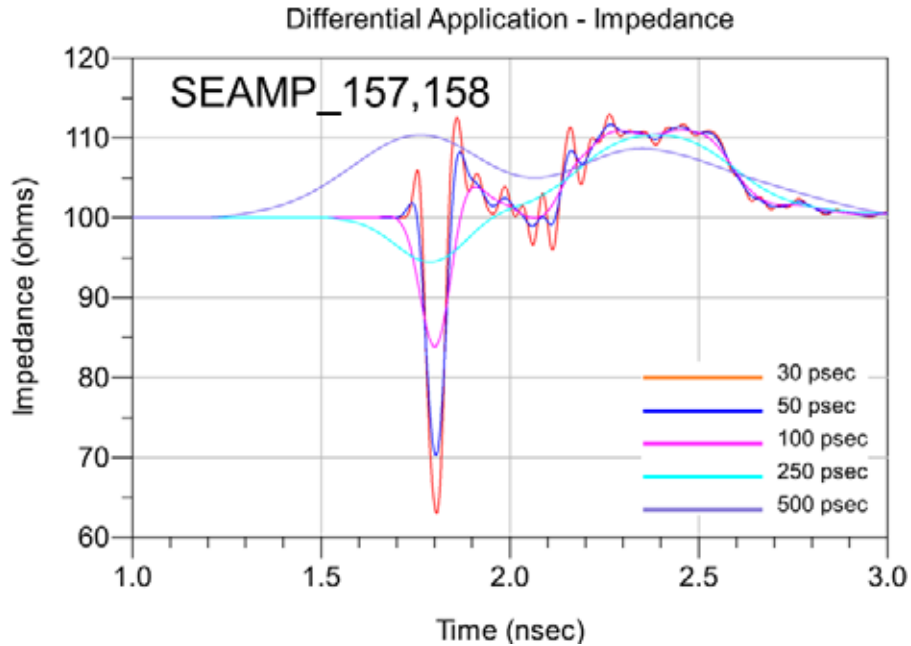


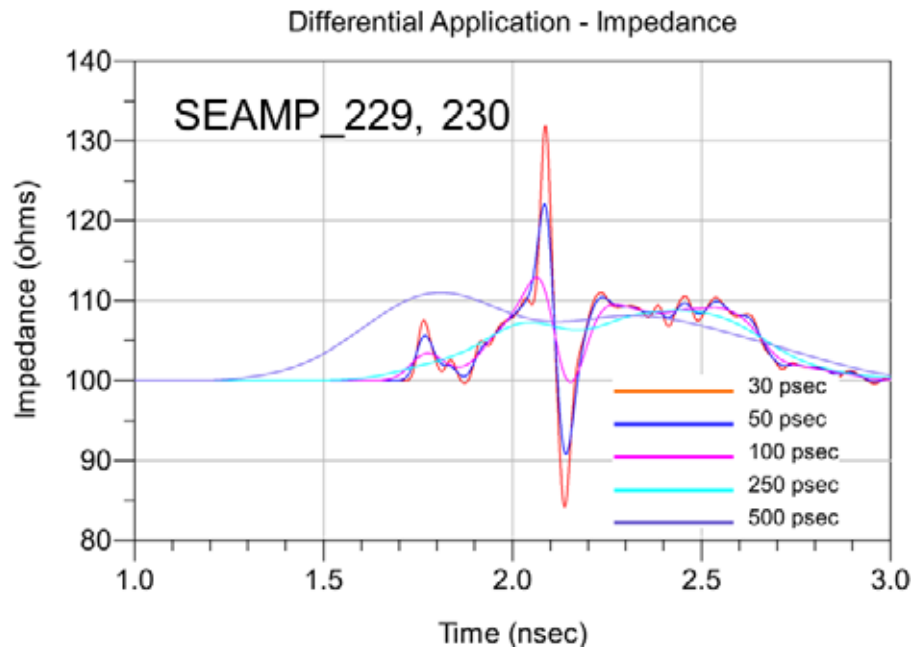Series: SEAMP/SEAF-RA**Description:** 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Series: SEAMP/SEAF-RA



Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Differential High Density Vertical Application – Propagation Delay

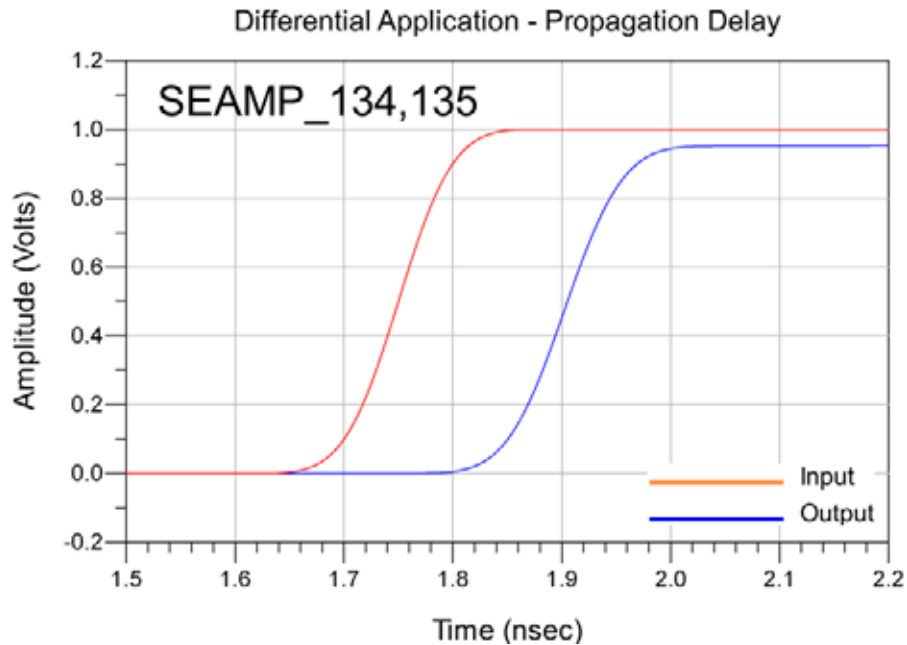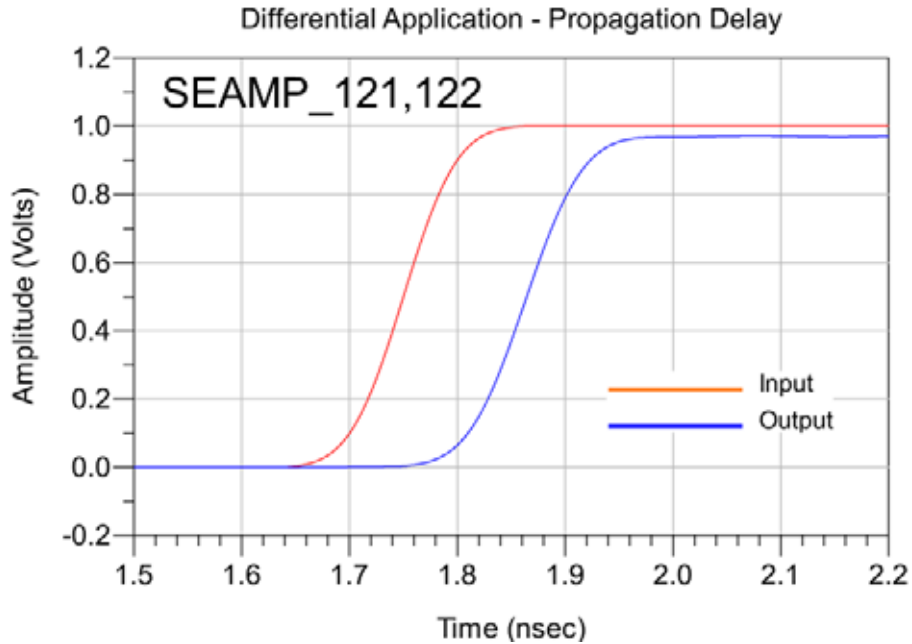


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

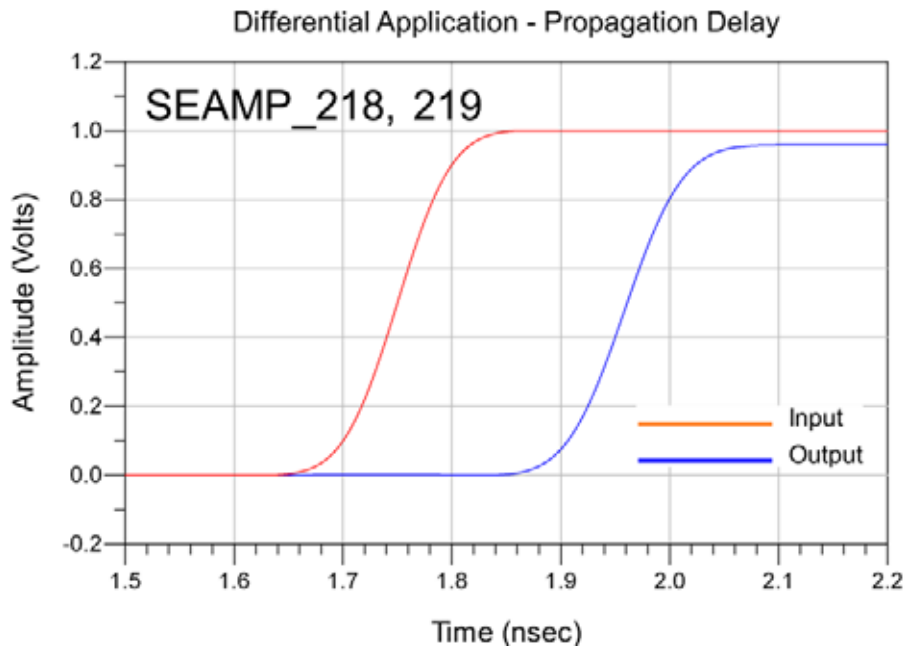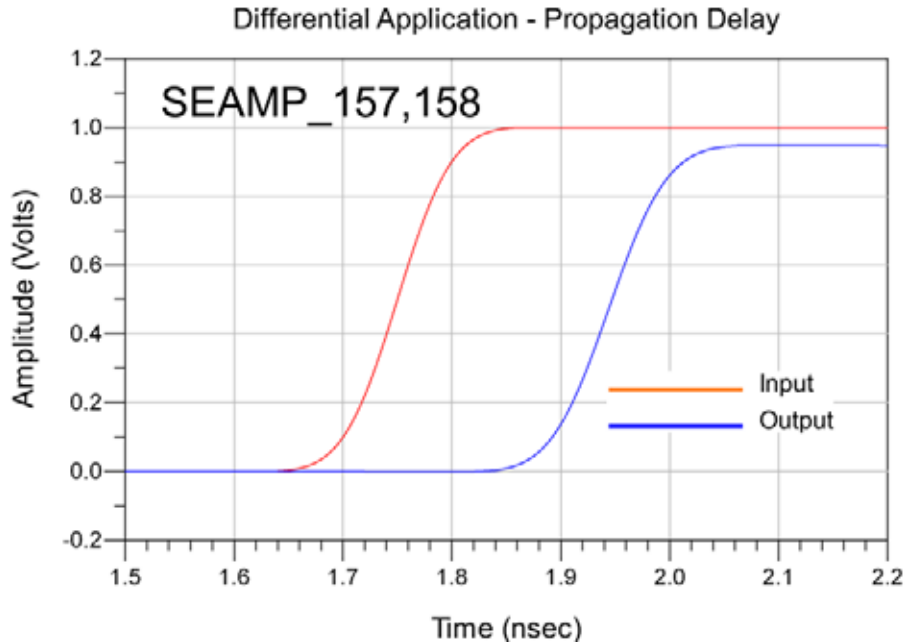

Series: SEAMP/SEAF-RA


Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

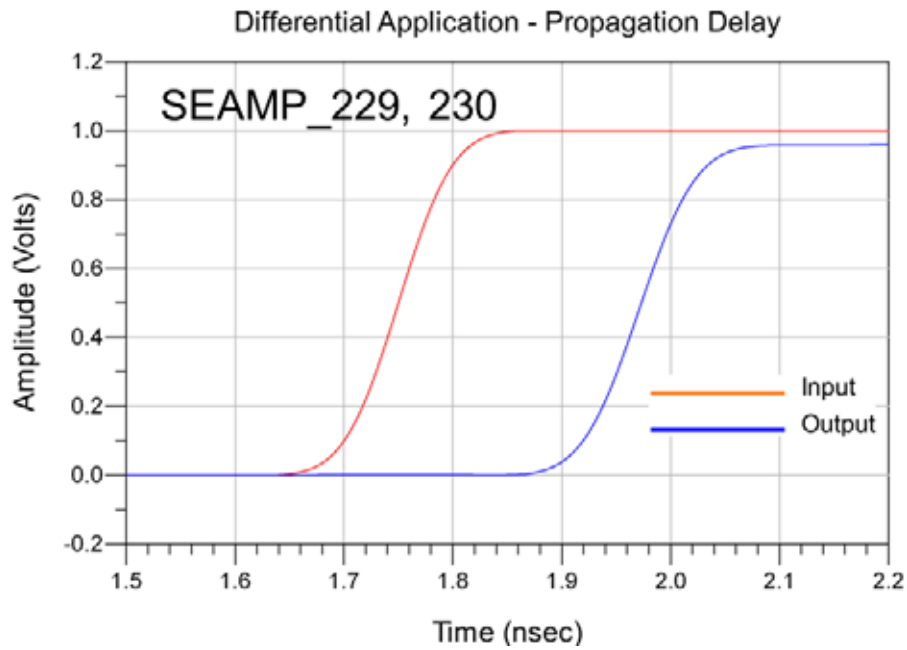


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Horizontal Application – NEXT, SEAMP_61,71_SEAMP_63,73

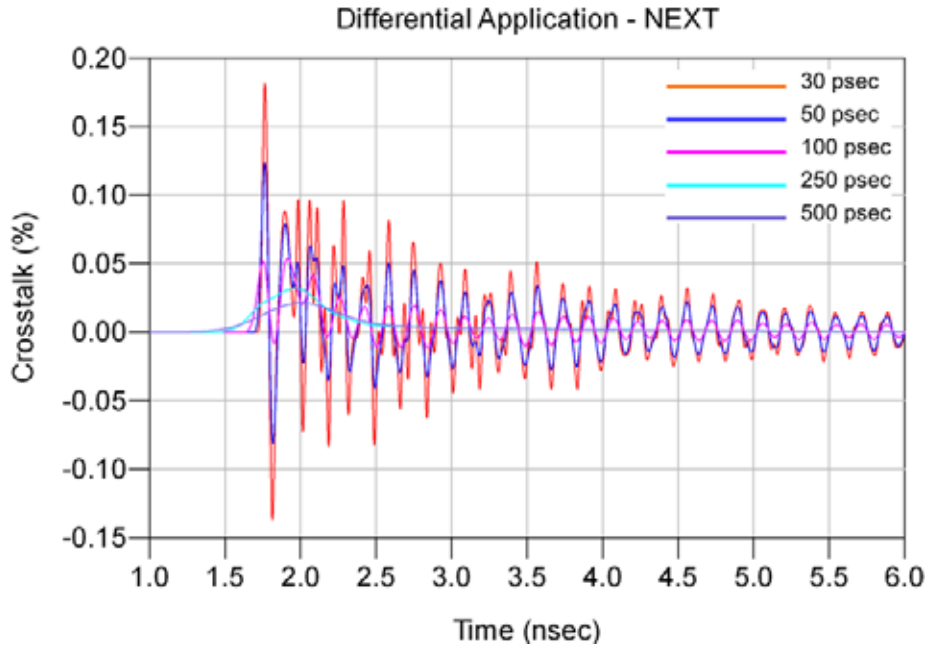


Diff Optimal Horizontal Application – FEXT, SEAMP_61,71_SEAMF-RA_63,73

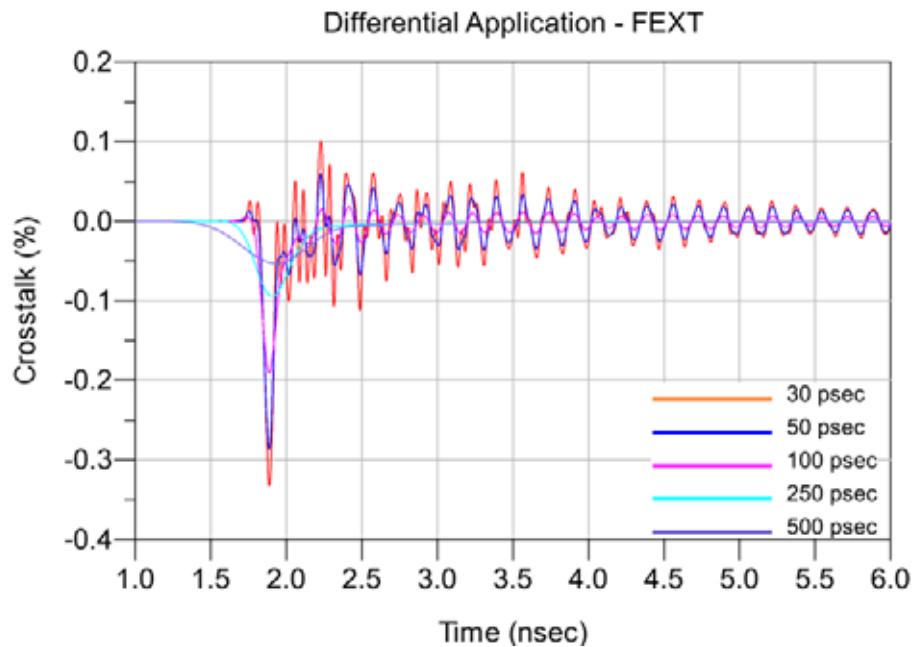


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Horizontal Application – NEXT, SEAMP_63,73_SEAMP_84,94

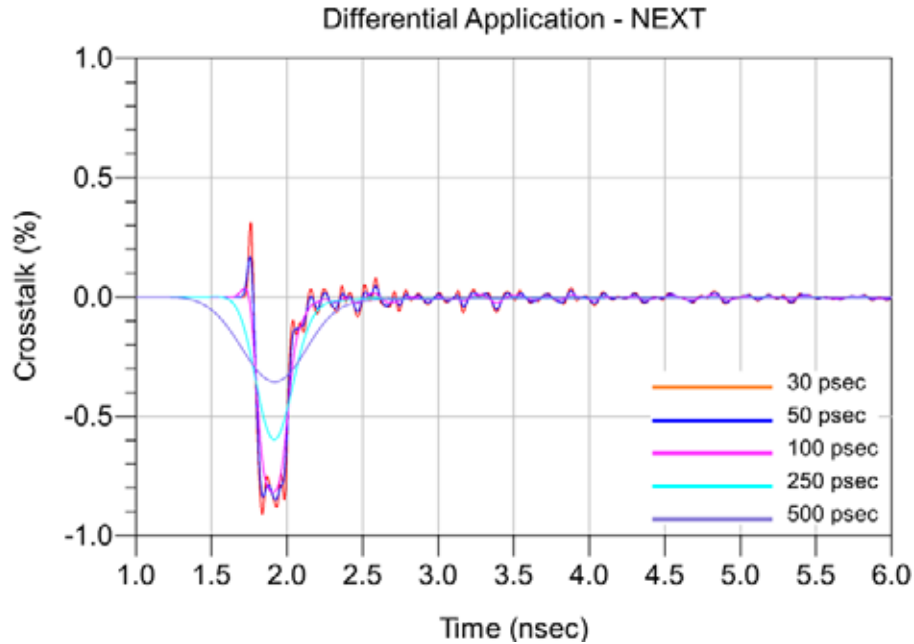


Diff Optimal Horizontal Application – FEXT, SEAMP_63,73_SEAF-RA_84,94

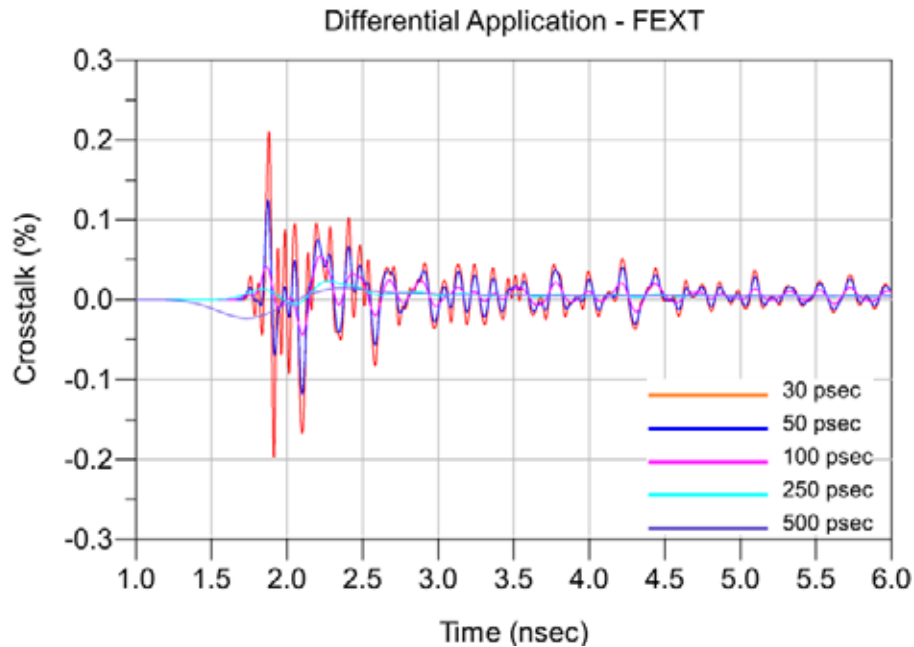


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Horizontal Application – NEXT, SEAMP_106,116_SEAMP_146,156

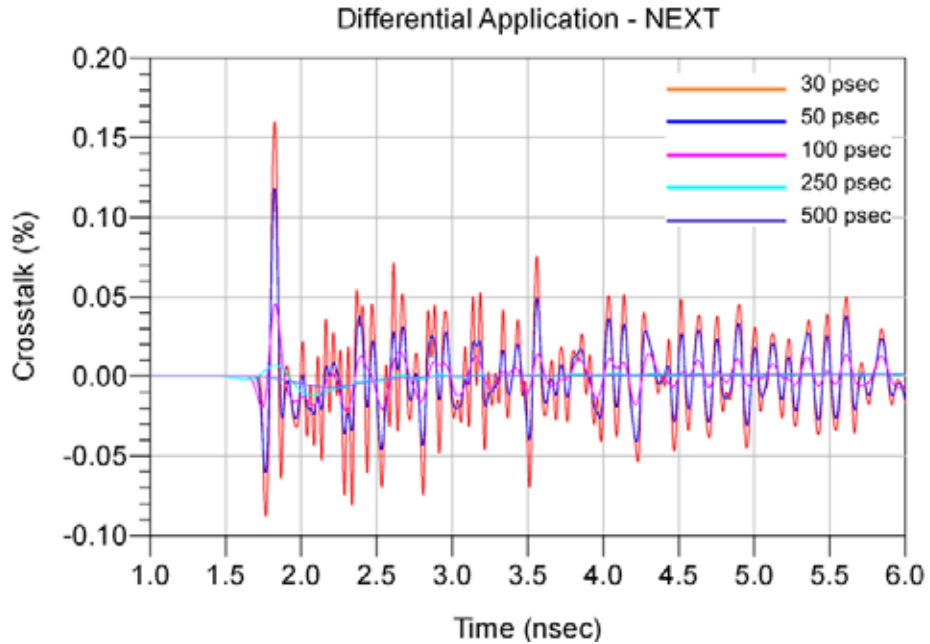


Diff Optimal Horizontal Application – FEXT, SEAMP_106,116_SEAF-RA_146,156

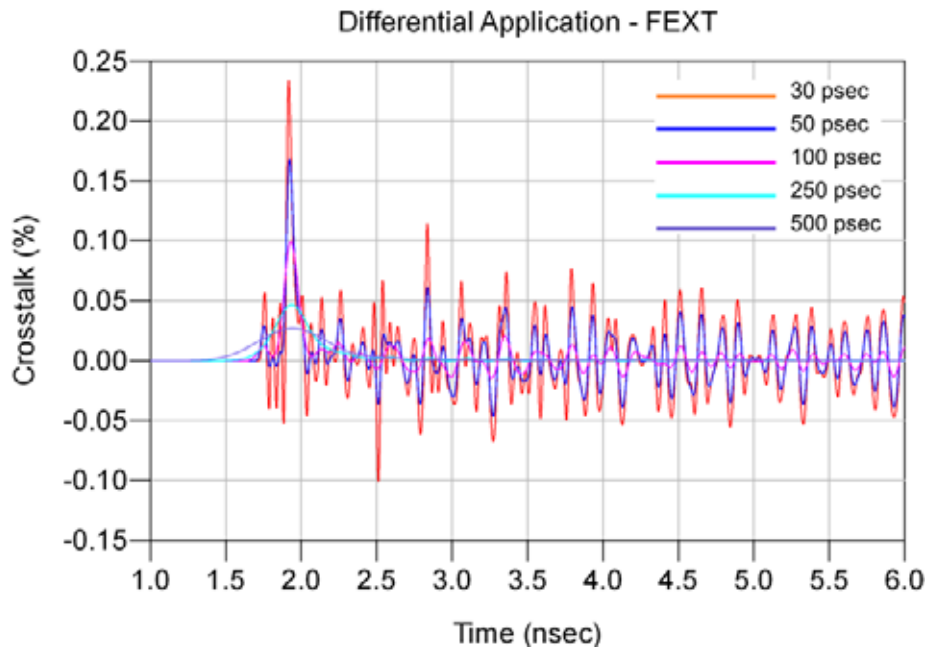


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Horizontal Application – NEXT, SEAMP_106,116_SEAMP_127,137

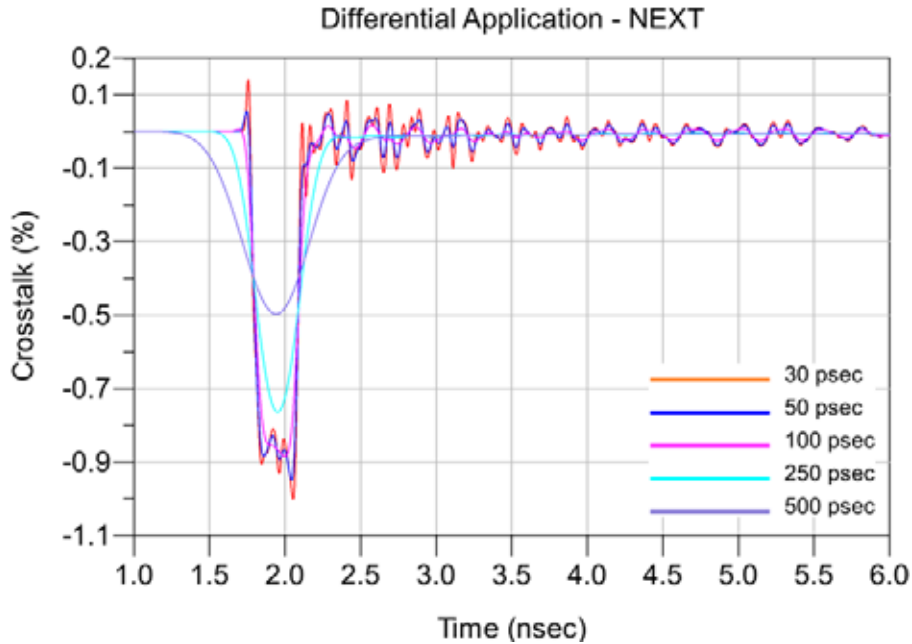


Diff Optimal Horizontal Application – FEXT, SEAMP_106,116_SEAF-RA_127,137

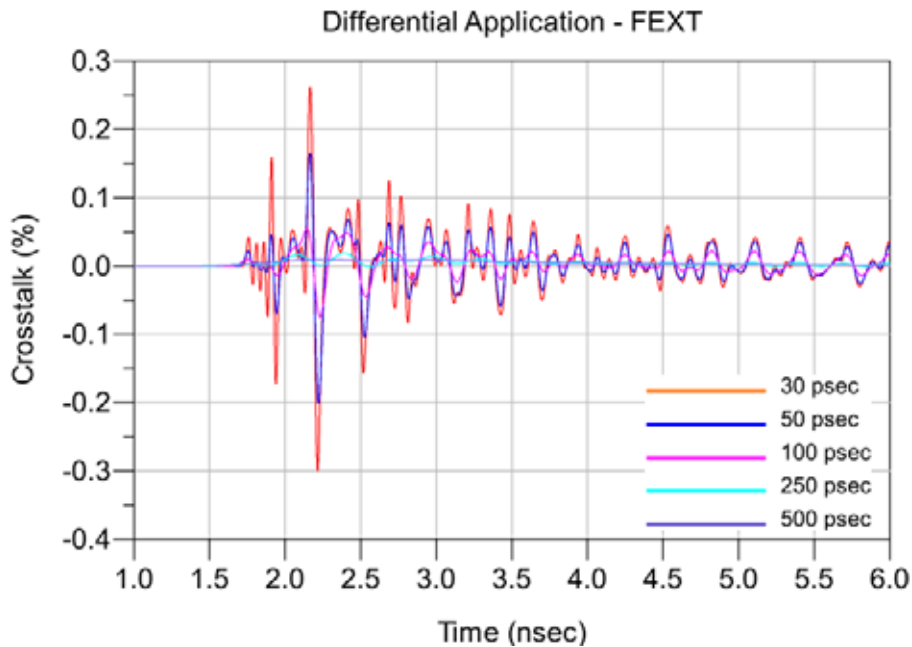


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Horizontal Application – NEXT, SEAMP_127, 137_SEAMP_148, 158

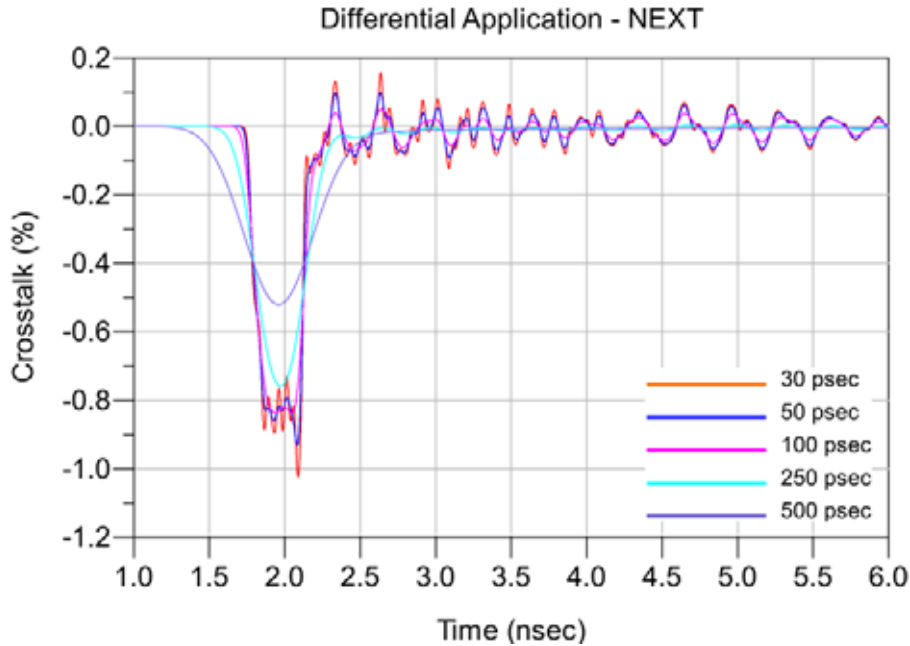


Diff Optimal Horizontal Application – FEXT, SEAMP_127, 137_SEAF-RA_148,158

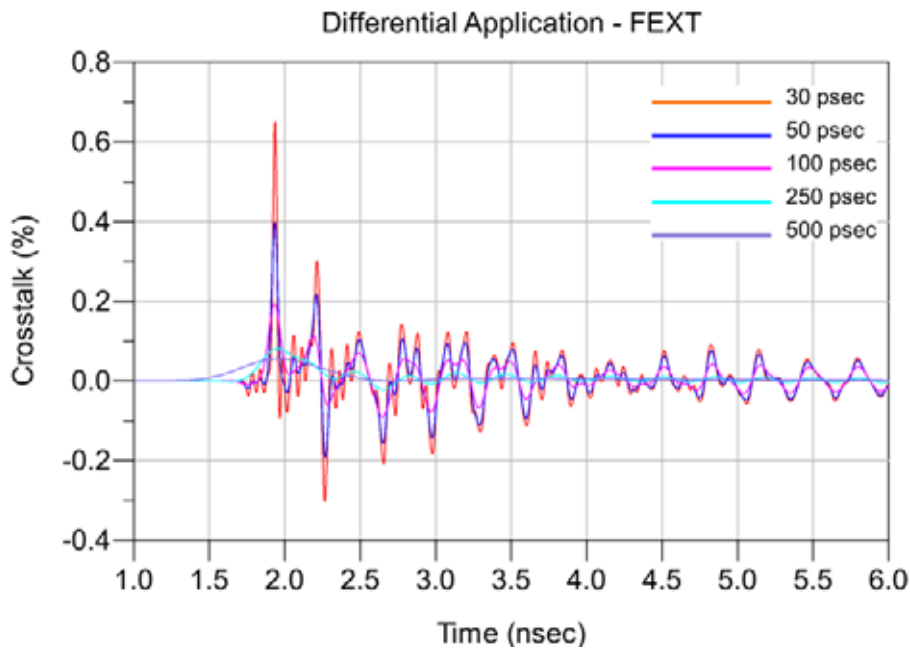


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Horizontal Application – NEXT, SEAMP_208, 218_SEAMP_210, 220

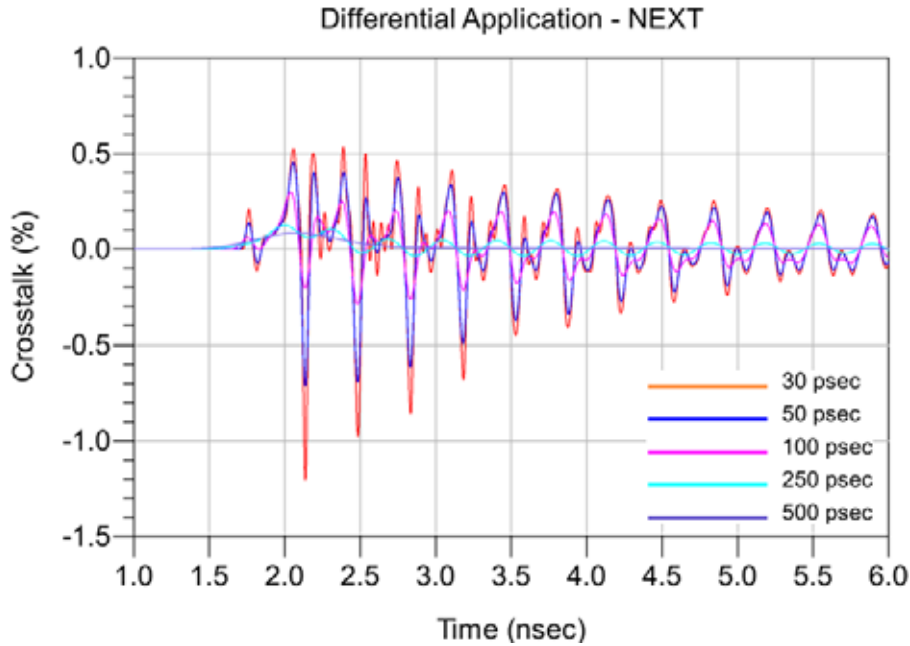


Diff Optimal Horizontal Application – FEXT, SEAMP_208, 218_SEAF-RA_210,220

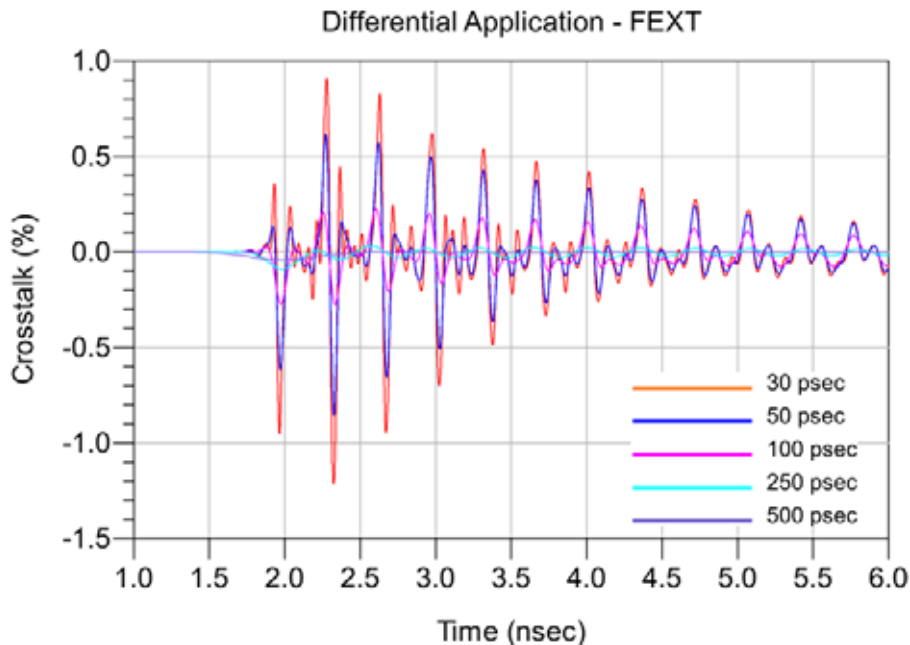


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Vertical Application – NEXT, SEAMP_145, 146_SEAMP_165, 166

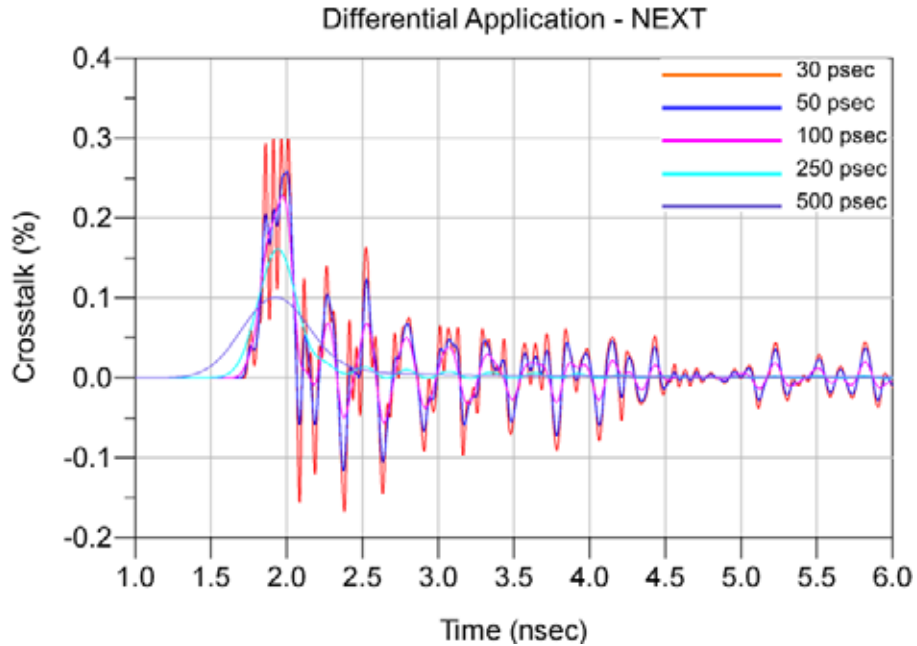


Diff Optimal Vertical Application – FEXT, SEAMP_145, 146_SEAF-RA_165, 166

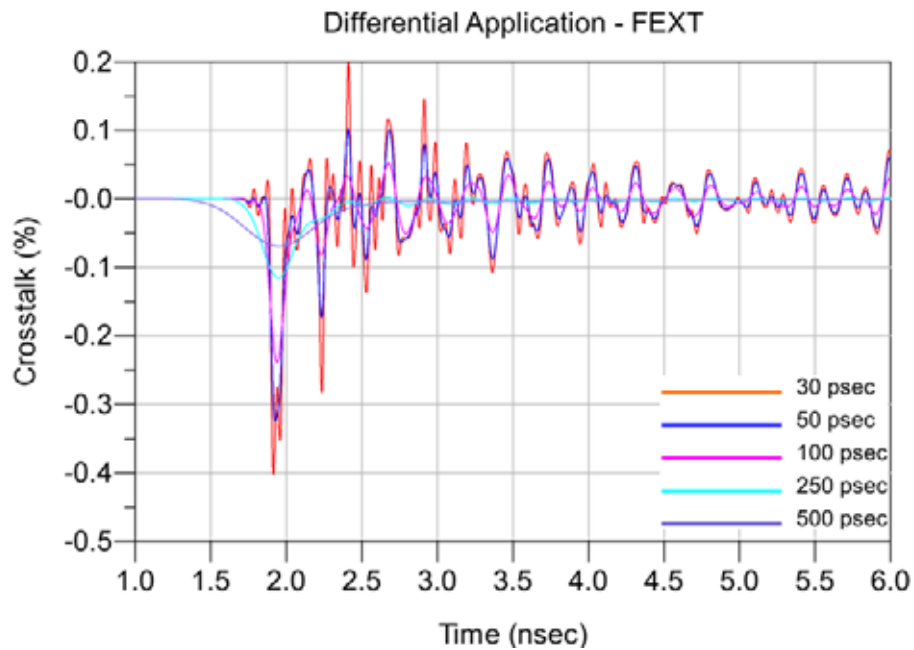


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Vertical Application – NEXT, SEAMP_145, 146_SEAMP_157, 158

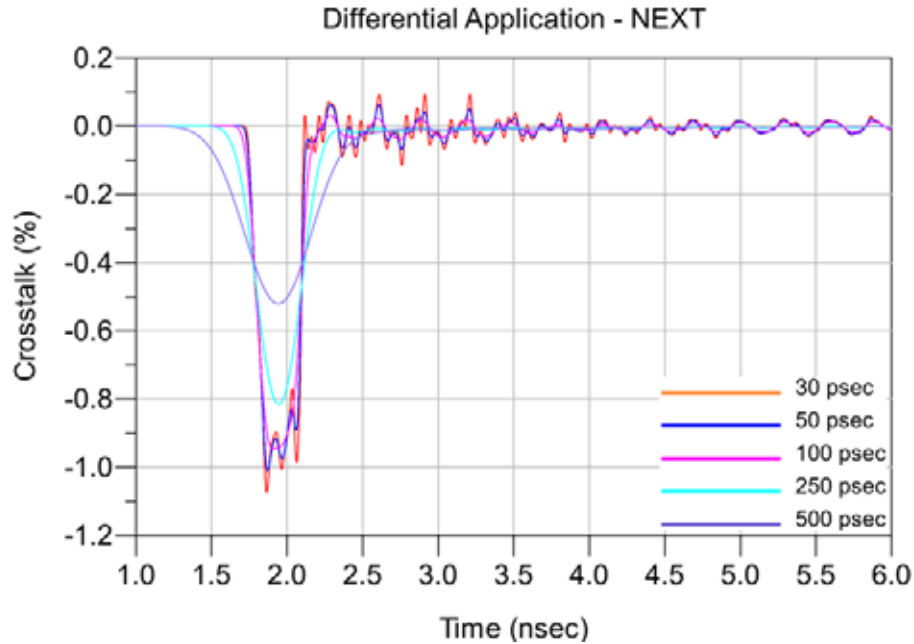


Diff Optimal Vertical Application – FEXT, SEAMP_145, 146_SEAF-RA_157, 158

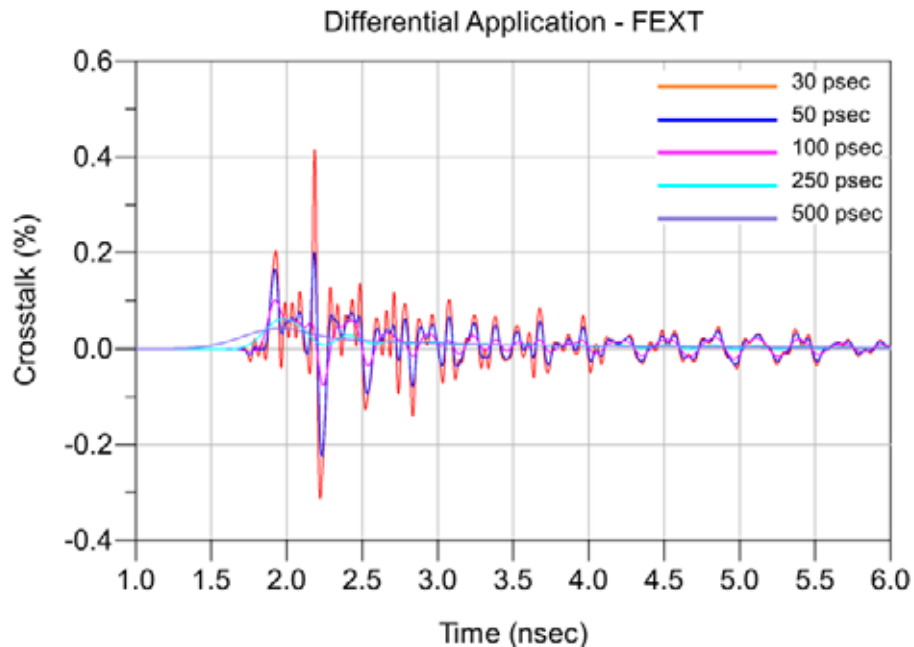


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Vertical Application – NEXT, SEAMP_165,166_SEAMP_169, 170

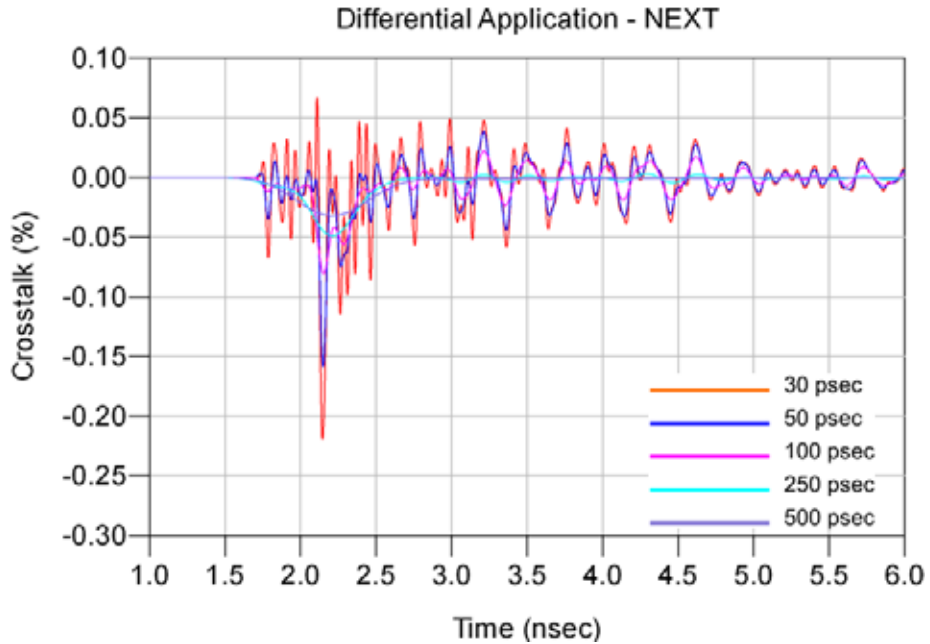


Diff Optimal Vertical Application – FEXT, SEAMP_165,166_SEAF-RA_169, 170

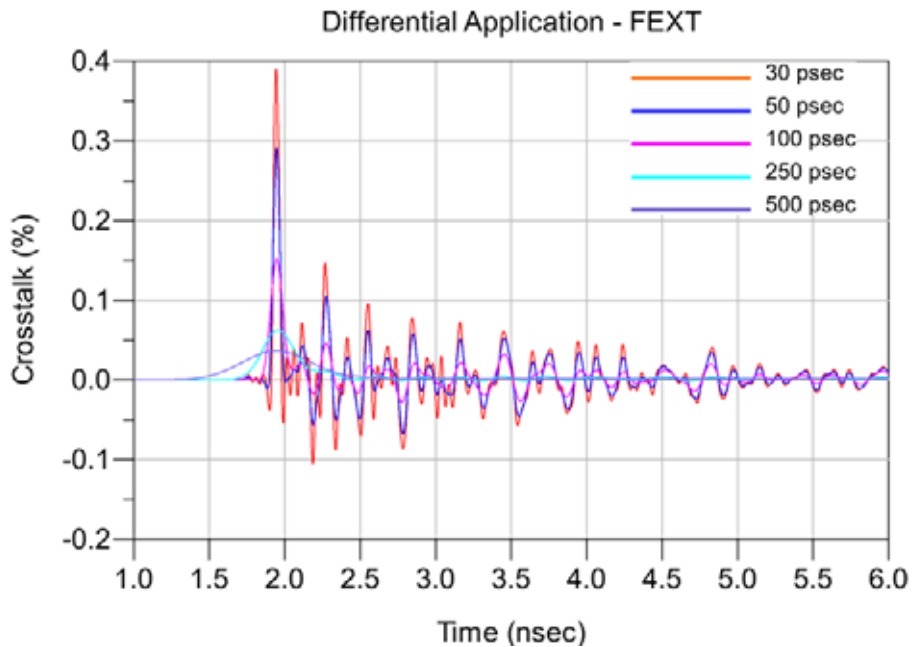


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff Optimal Vertical Application – NEXT, SEAMP_217,218_SEAMP_229, 230

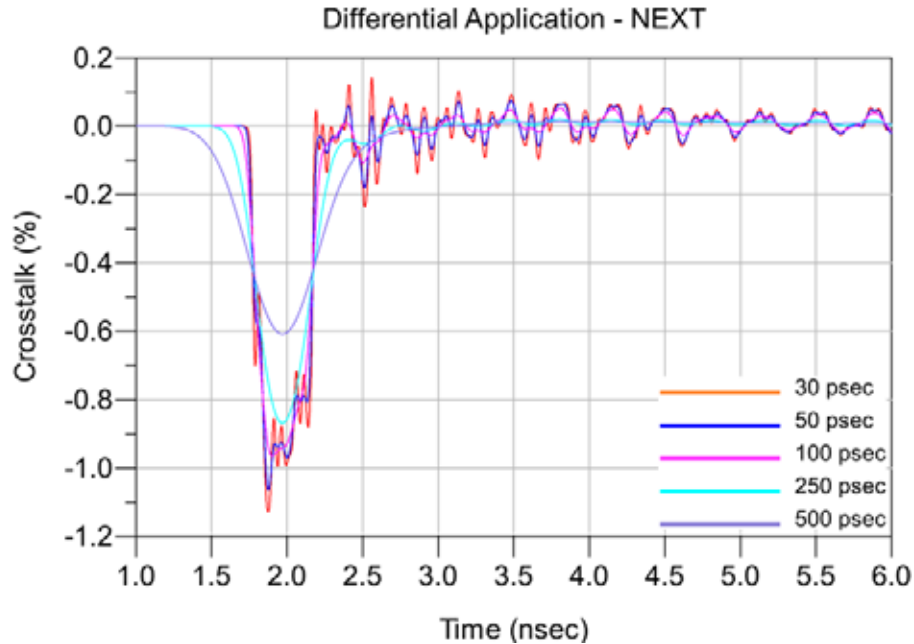


Diff Optimal Vertical Application – FEXT, SEAMP_217,218_SEAF-RA_229, 230

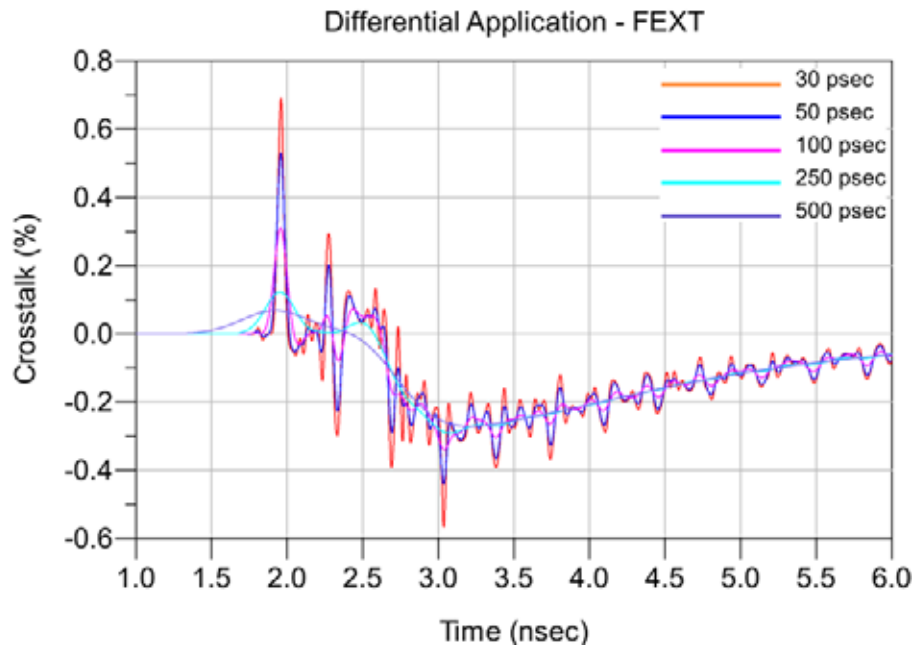


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff High Density Vertical Application – NEXT, SEAMP_121,122_SEAMP_132,133

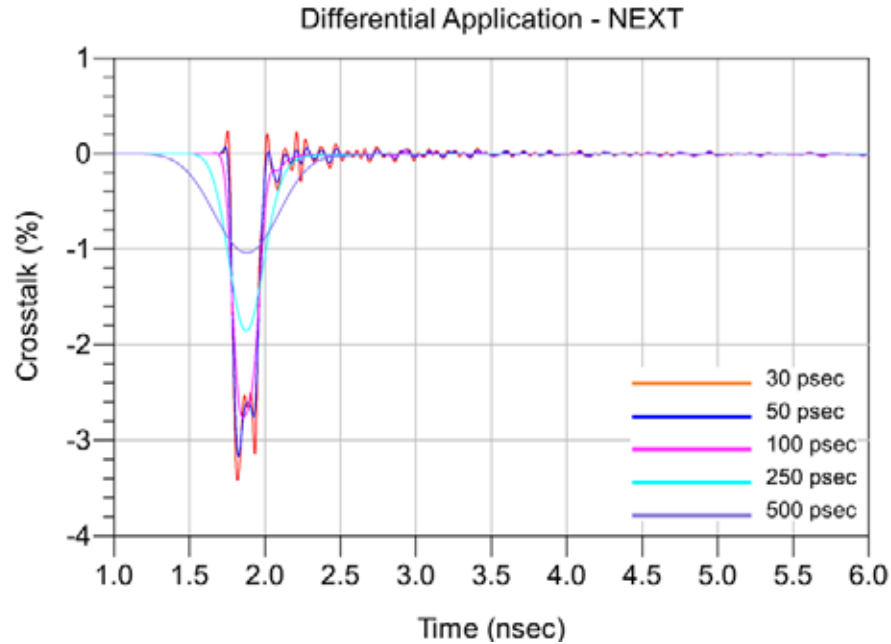


Diff High Density Vertical Application – FEXT, SEAMP_121,122_SEAF-RA_132, 133

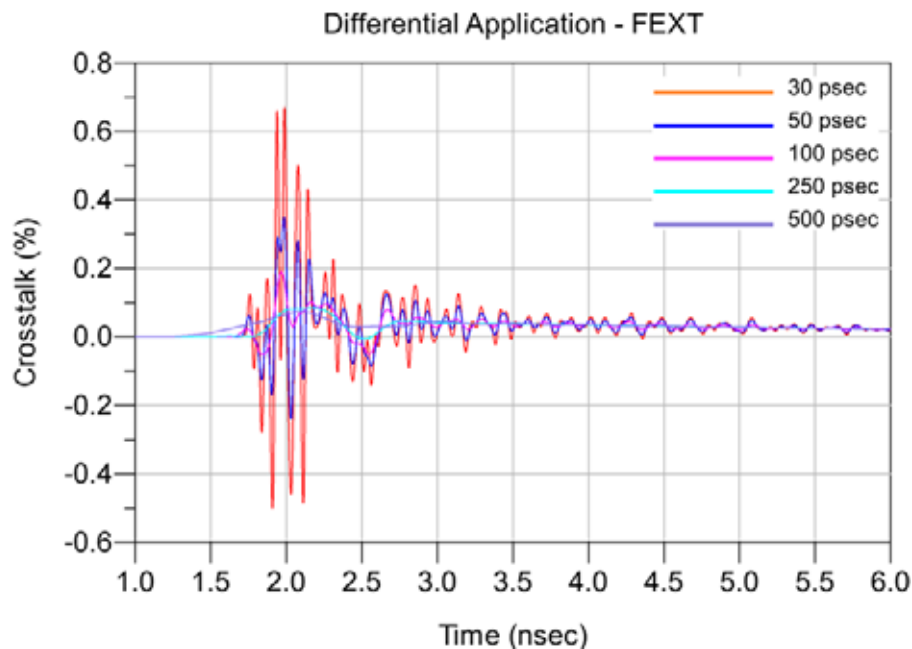


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff High Density Vertical Application – NEXT, SEAMP_134,135_SEAMP_154,155

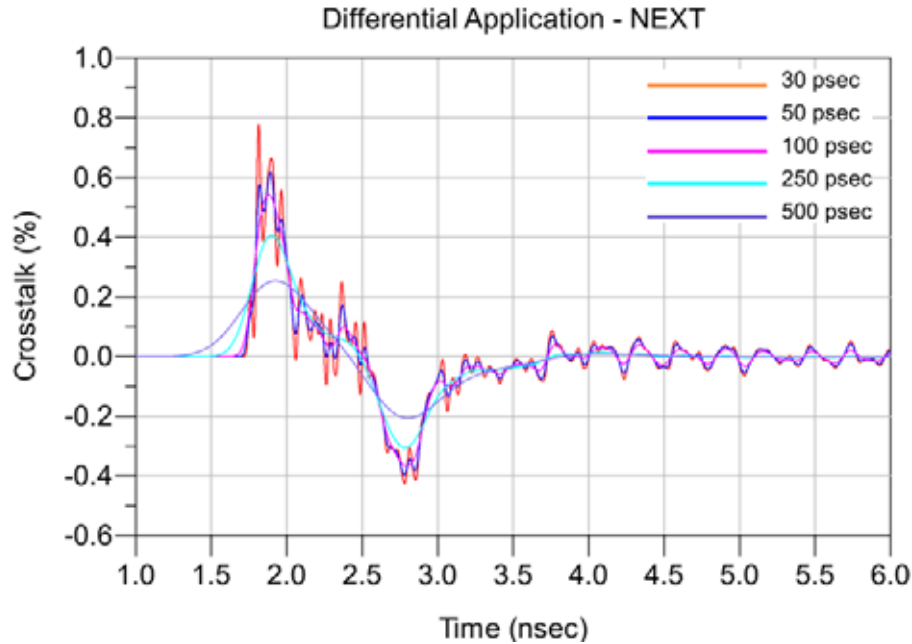


Diff High Density Vertical Application – FEXT, SEAMP_134,135_SEAF-RA_154,155

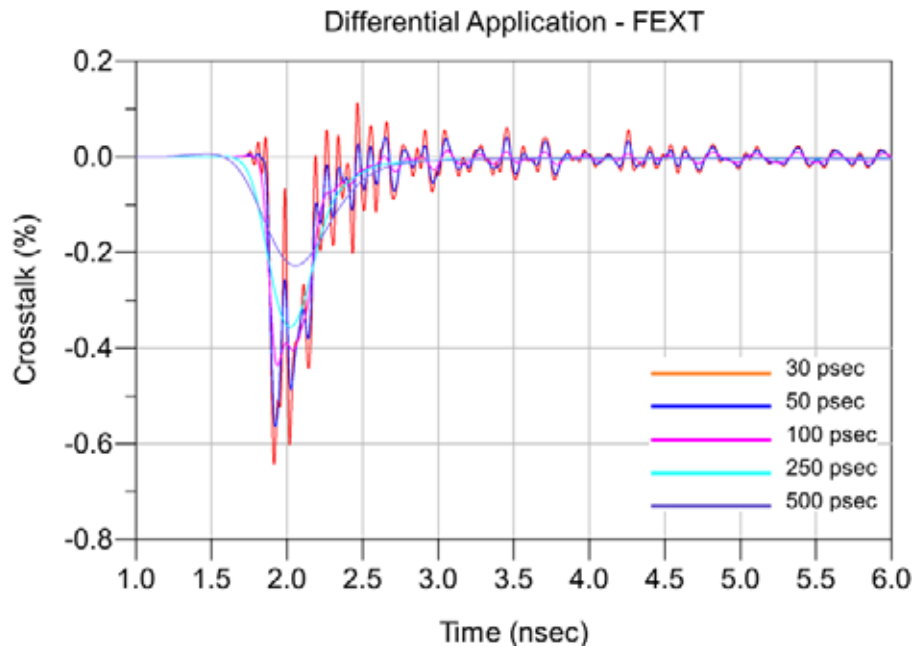


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff High Density Vertical Application – NEXT, SEAMP_134,135_SEAMP_145,146

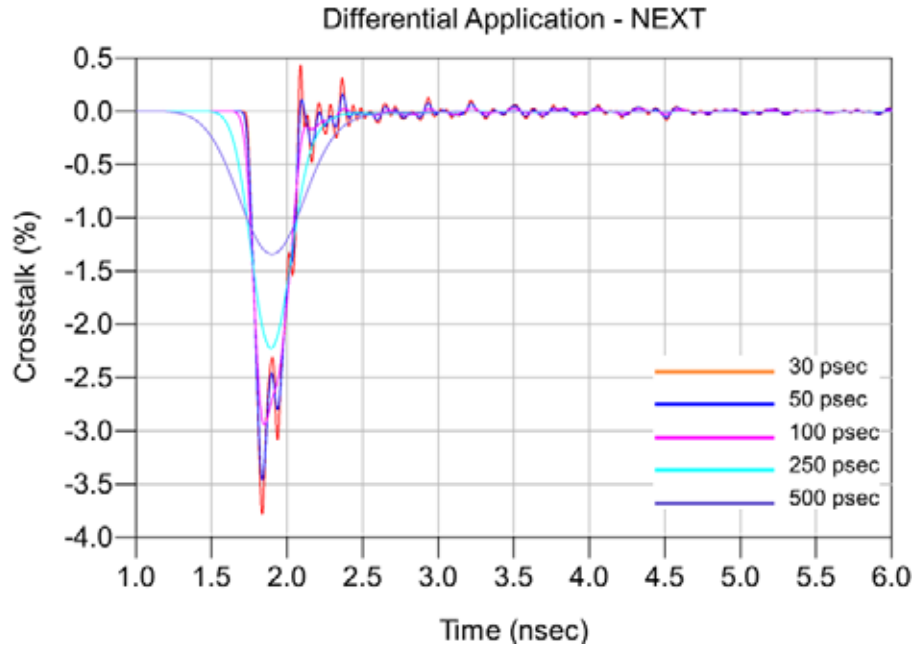


Diff High Density Vertical Application – FEXT, SEAMP_134,135_SEAF-RA_145,146

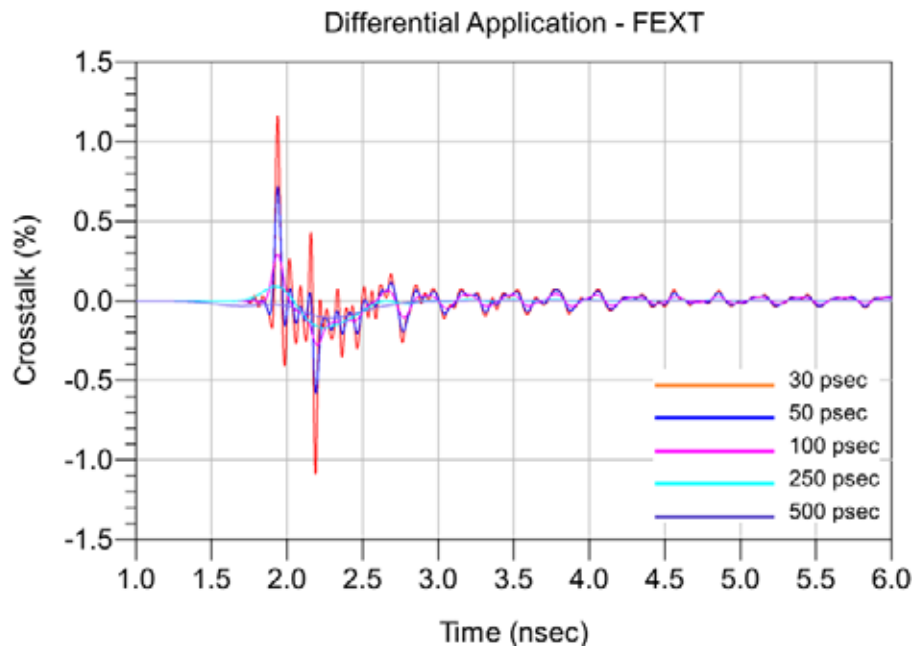


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff High Density Vertical Application – NEXT, SEAMP_154,155_SEAMP_157,158

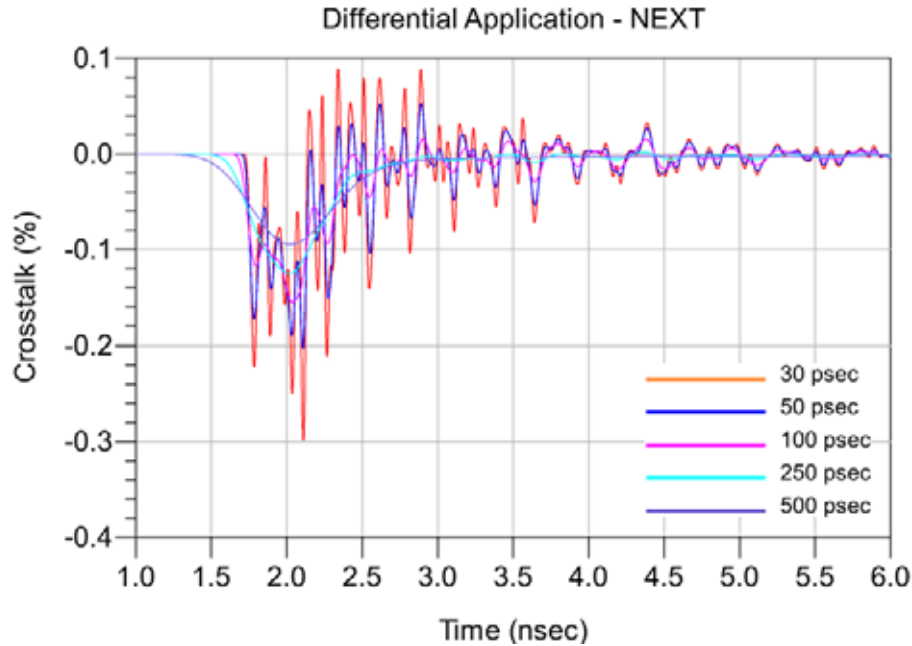


Diff High Density Vertical Application – FEXT, SEAMP_154,155_SEAF-RA_157,158

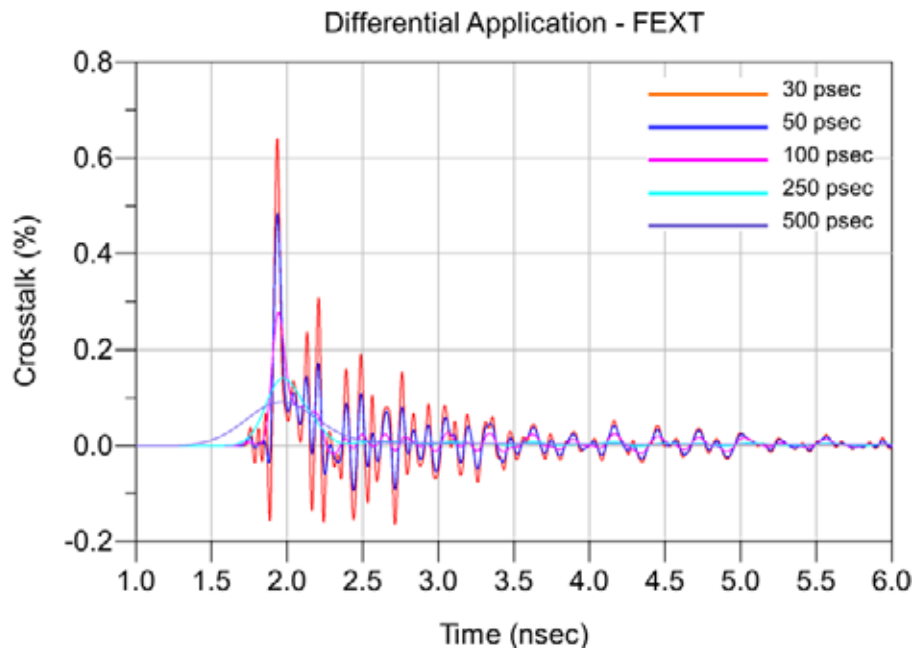


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Diff High Density Vertical Application – NEXT, SEAMP_218, 219_SEAMP_229, 230

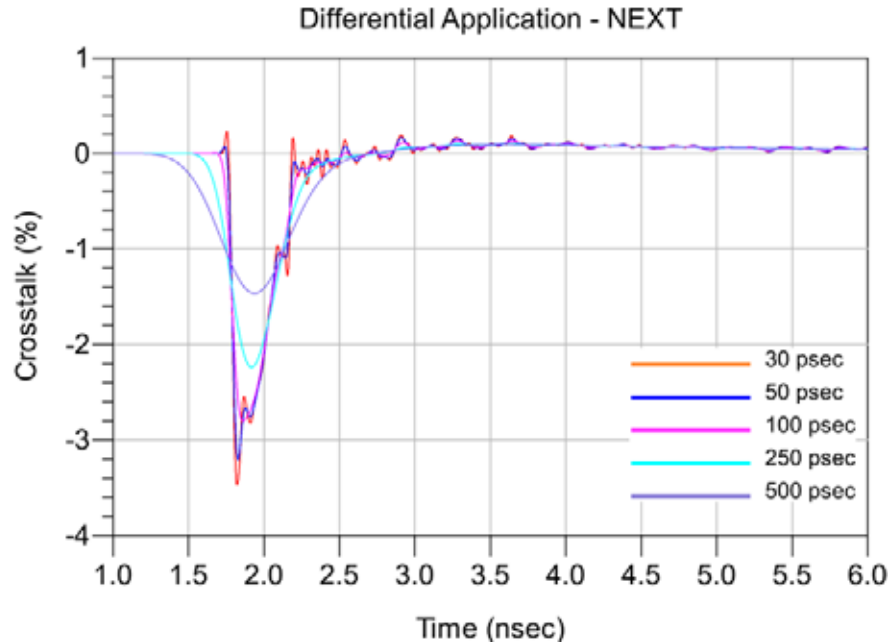

Diff High Density Vertical Application – FEXT, SEAMP_218, 219_SEAF-RA_229, 230

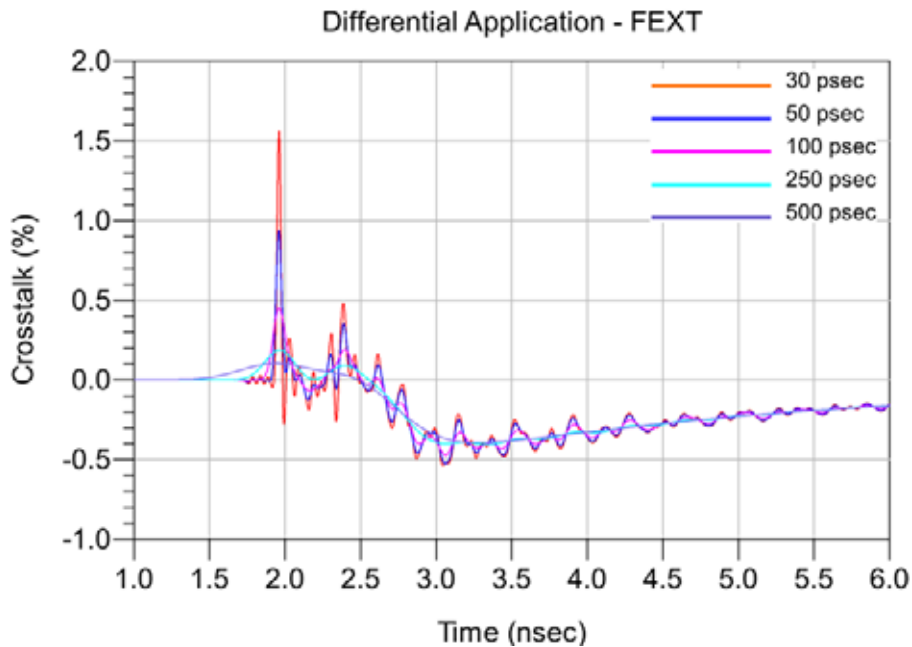

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Appendix C – Product and Test System Descriptions

Product Description


Product test samples are SEAMP/SEAF-RA Series connectors. The part numbers are SEAMP-30-02.0-L-10 and SEAF-30-01-S-10-1-RA-TR. The SEAMP/SEAF-RA Series is an open pin field connector designed for single-ended signals with various options for differential signaling configurations. The open pin field array is 10 row providing 30 signal pins per row. A photo of the test articles mounted to SI test boards is shown below.

Test System Description

The test fixtures are composed of four-layer FR-4 material with 50Ω signal trace and pad configurations designed for the electrical characterization of Samtec high speed connector products. A PCB mount SMA connector is used to interface the VNA test cables to the test fixtures. Optimization of the SMA launch was performed using full wave simulation tools to minimize reflections. Ten test fixtures are specific to the SEAMP/SEAF-RA Series connector set and identified by part numbers PCB-103845-TST-01-B to E to PCB-103845-TST-05-B to E. Calibration standards specific to the SEAMP/SEAF-RA Series are located on the calibration boards PCB-103845-TST-06. To keep trace lengths short, five different test board sets were required to access the necessary signal pins.

PCB-103845-TST-XX Test Fixtures

Shown below is a photograph of one of the five test board sets.

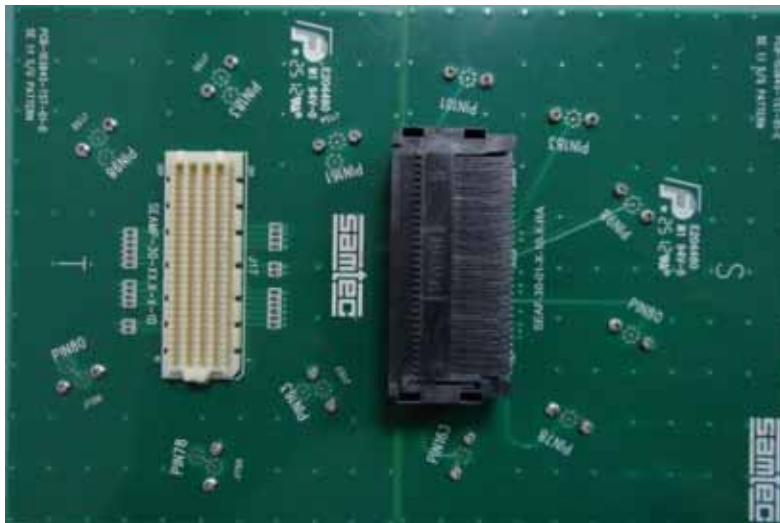


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

PCB-103845-TST-XX PCB Layout Panel

Artwork of the PCB design is shown below.

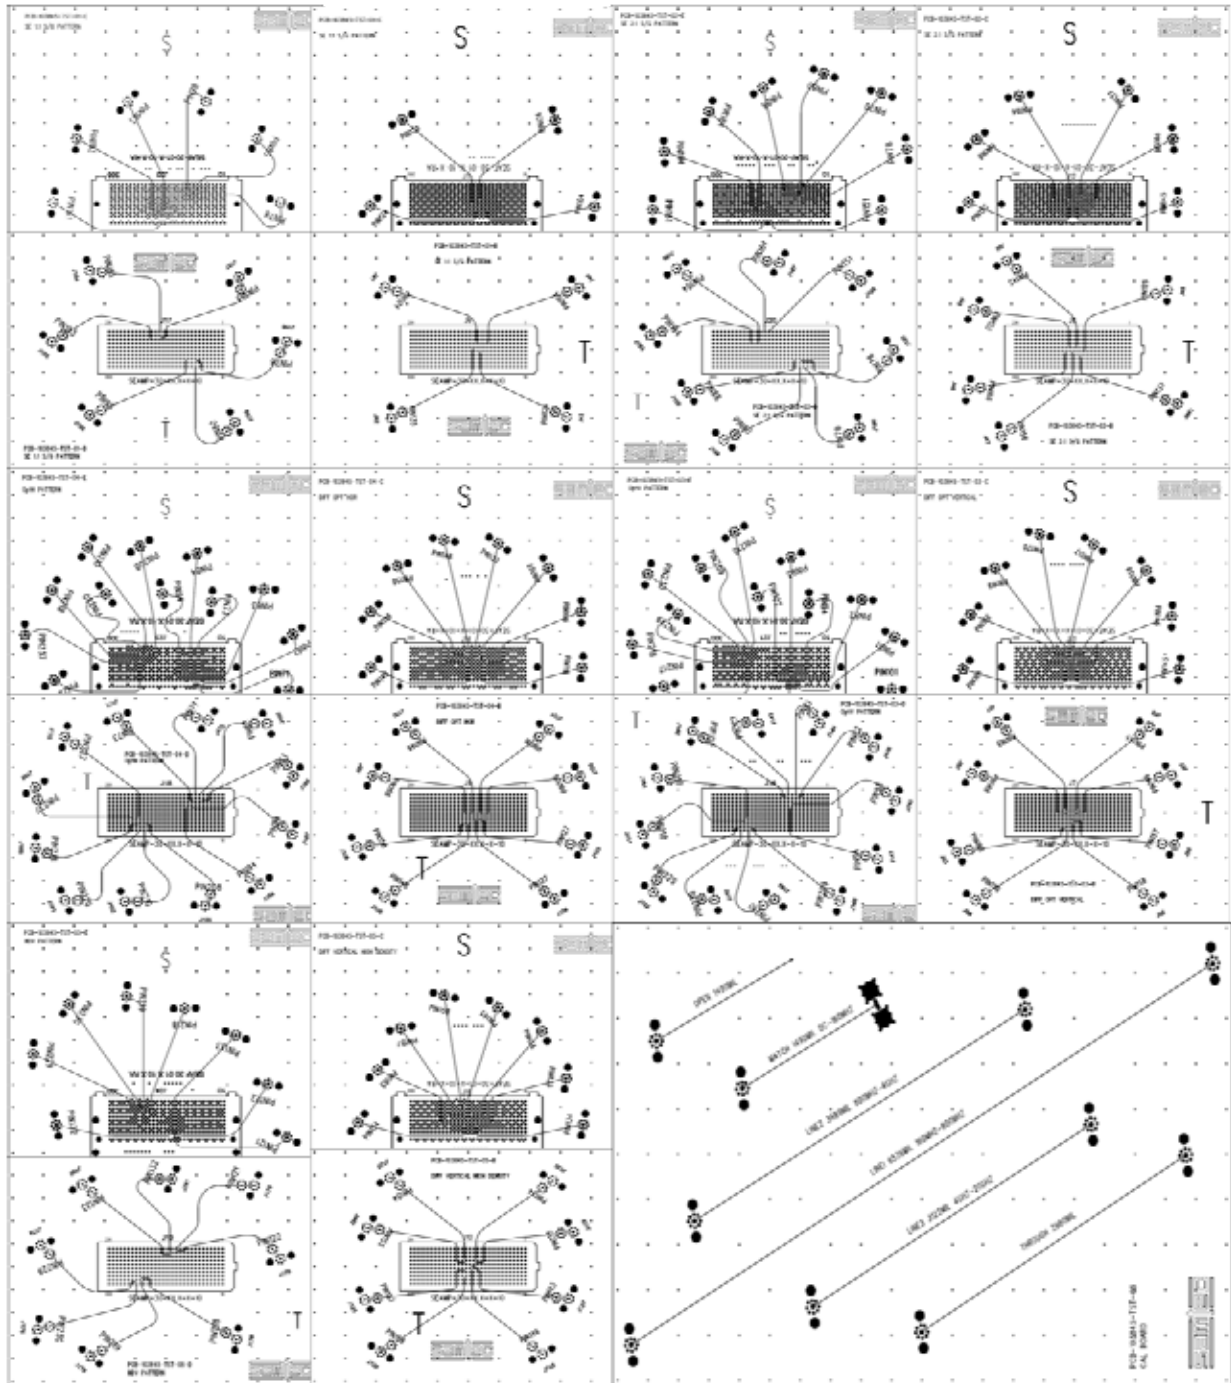

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle


PCB Fixtures

The test fixtures used are as follows:

PCB-103845 -TST-01-B – SEAMP Series Test Board for SE 1:1 S/G Pattern
PCB-103845 -TST-01-C – SEAF-RA Series Test Board for SE 1:1 S/G Pattern
PCB-103845 -TST-01-D – SEAMP Series Test Board for SE 1:1 S/G Pattern
PCB-103845 -TST-01-E – SEAF-RA Series Test Board for SE 1:1 S/G Pattern
PCB-103845 -TST-02-B – SEAMP Series Test Board for SE 2:1 S/G Pattern
PCB-103845 -TST-02-C – SEAF-RA Series Test Board for SE 2:1 S/G Pattern
PCB-103845 -TST-02-D – SEAMP Series Test Board for SE 2:1 S/G Pattern
PCB-103845 -TST-02-E – SEAF-RA Series Test Board for SE 2:1 S/G Pattern
PCB-103845 -TST-03-B – SEAMP Series Test Board for Differential Optimal Vertical
PCB-103845 -TST-03-C – SEAF-RA Series Test Board for Differential Optimal Vertical
PCB-103845 -TST-03-D – SEAMP Series Test Board for Differential Optimal Vertical
PCB-103845 -TST-03-E – SEAF-RA Series Test Board for Differential Optimal Vertical
PCB-103845-TST-04-B – SEAMP Series Test Board for Differential Optimal Horizontal
PCB-103845 -TST-04-C – SEAF-RA Series Test Board for Differential Optimal Horizontal
PCB-103845-TST-04-D – SEAMP Series Test Board for Differential Optimal Horizontal
PCB-103845 -TST-04-E – SEAF-RA Series Test Board for Differential Optimal Horizontal
PCB-103845 -TST-05-B – SEAMP Series Test Board for Differential High Density Vertical
PCB-103845 -TST-05-C – SEAF-RA Series Test Board for Differential High Density Vertical
PCB-103845 -TST-05-D – SEAMP Series Test Board for Differential High Density Vertical
PCB-103845 -TST-05-E – SEAF-RA Series Test Board for Differential High Density Vertical




Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

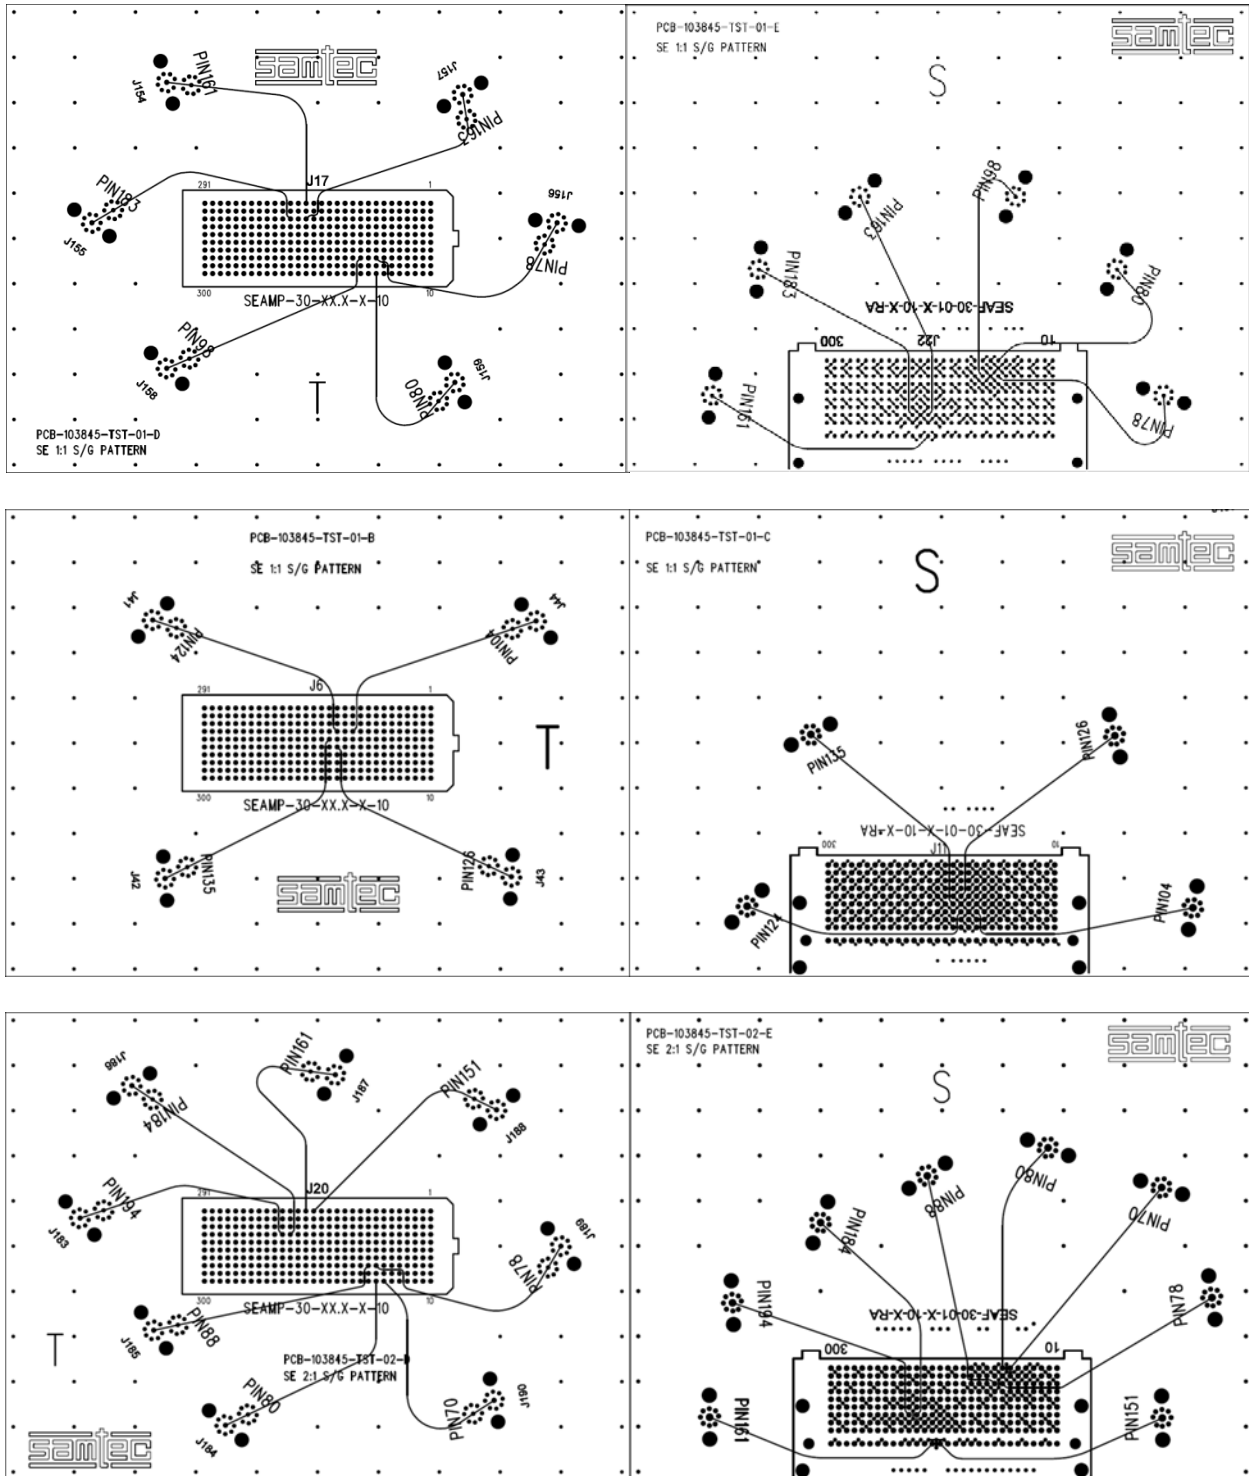


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

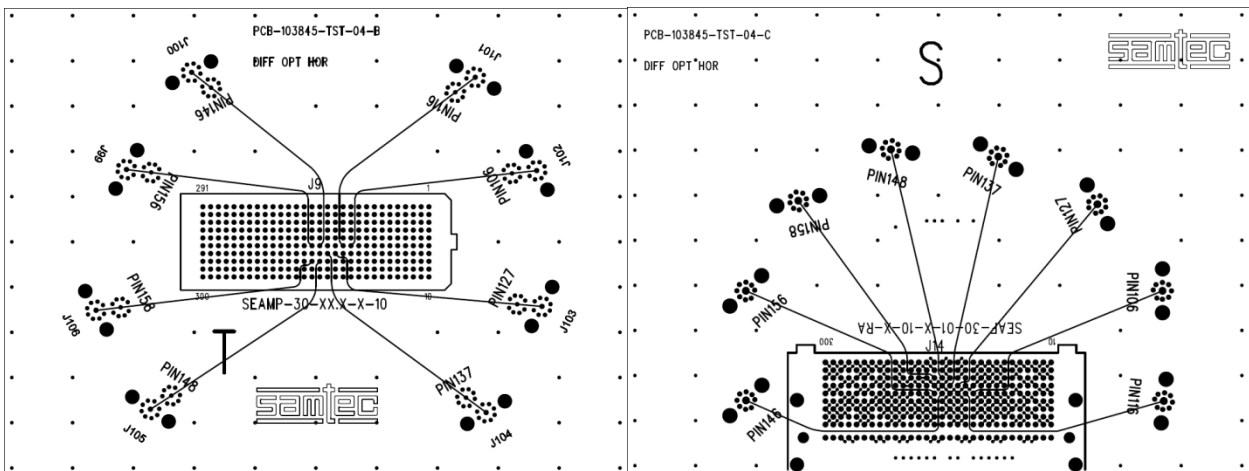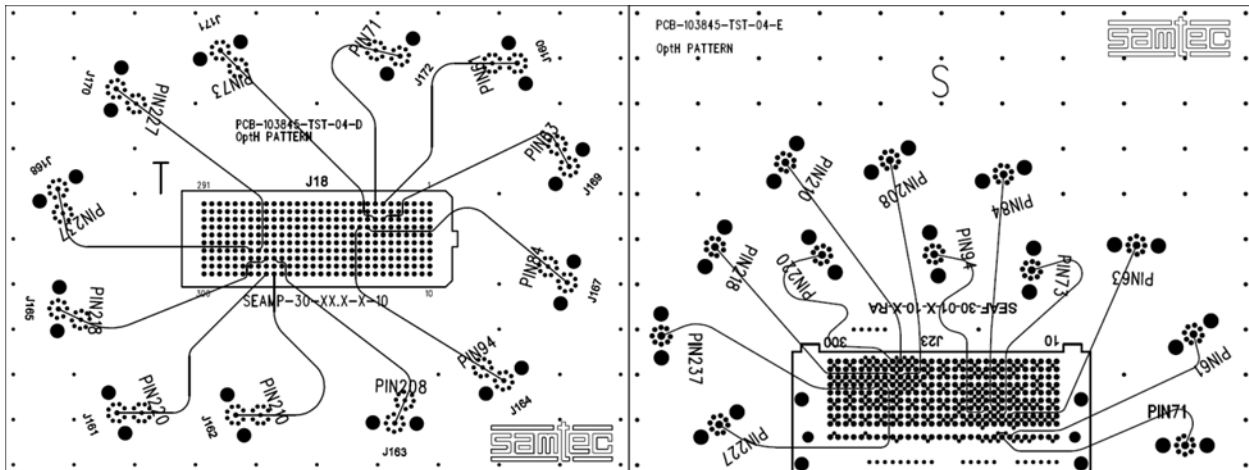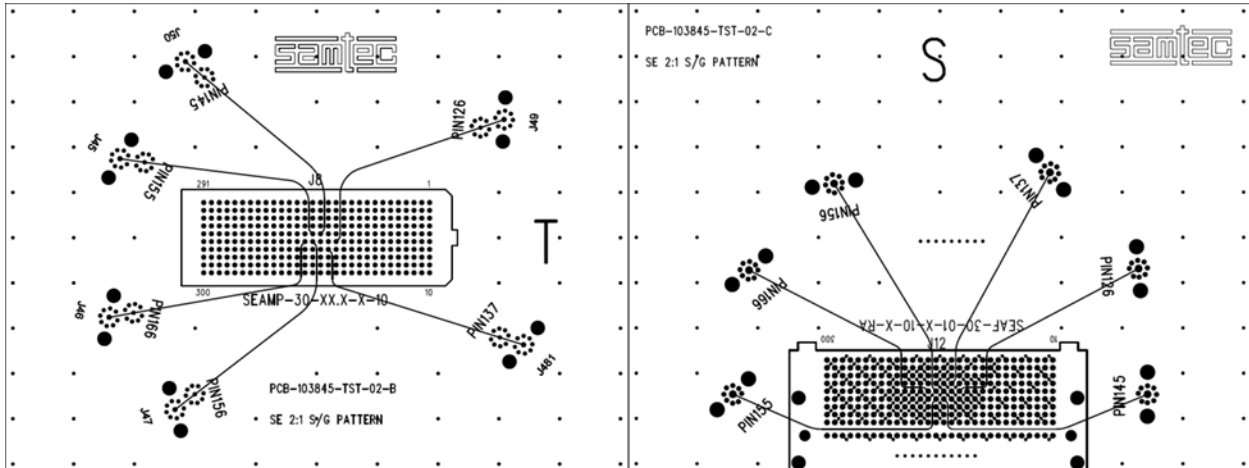


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

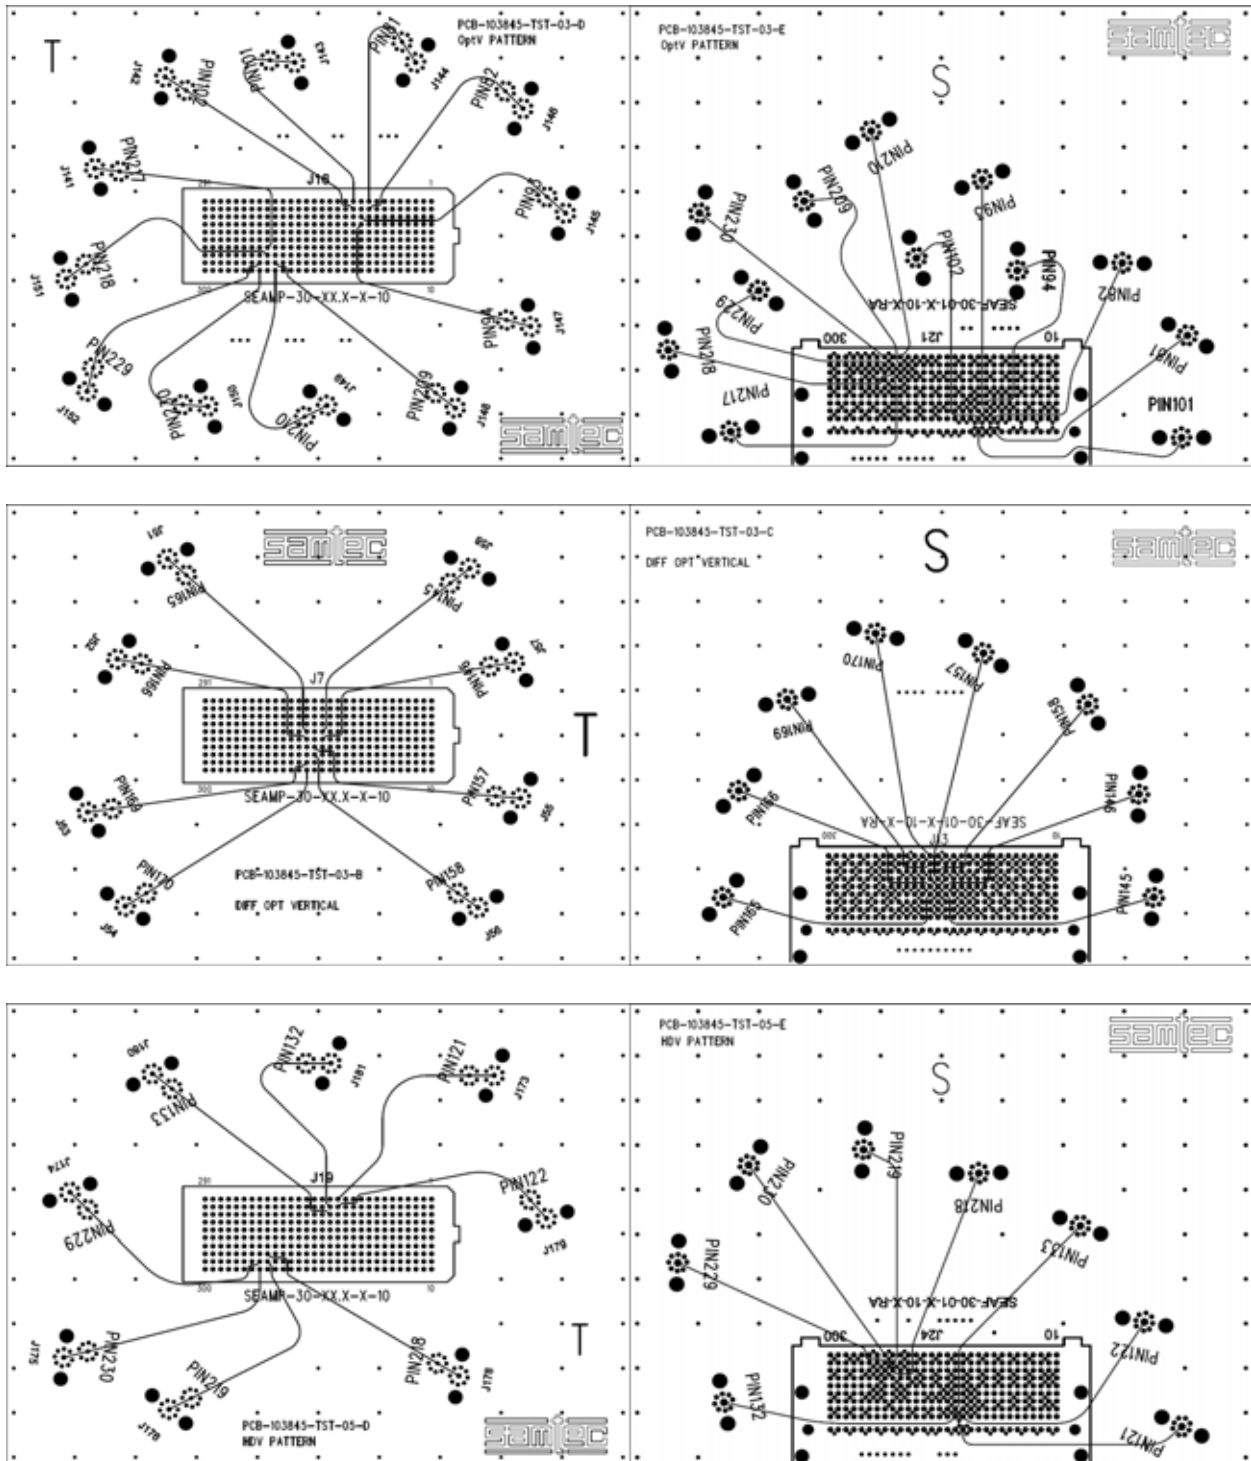

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

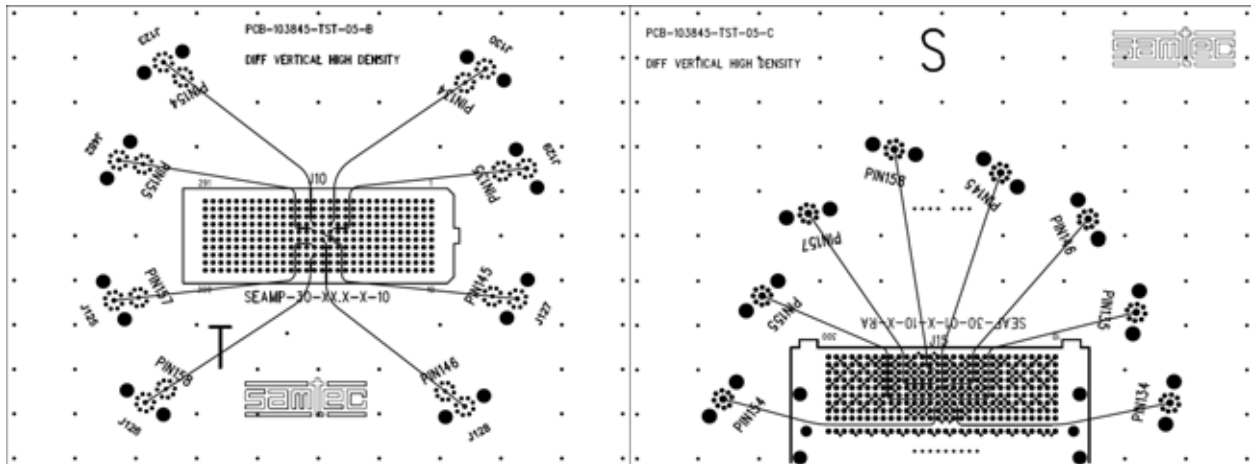


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Calibration Board

Test fixture losses and test point reflections were removed from the data by use of TRL calibration. The calibration board is shown below. Prior to making any measurements, the calibration board is characterized to obtain parameters required to define the calibration kit. Once a cal kit is defined, calibration using the standards on the calibration board can be performed. Finally, the device can be measured and the test board effects are automatically removed.

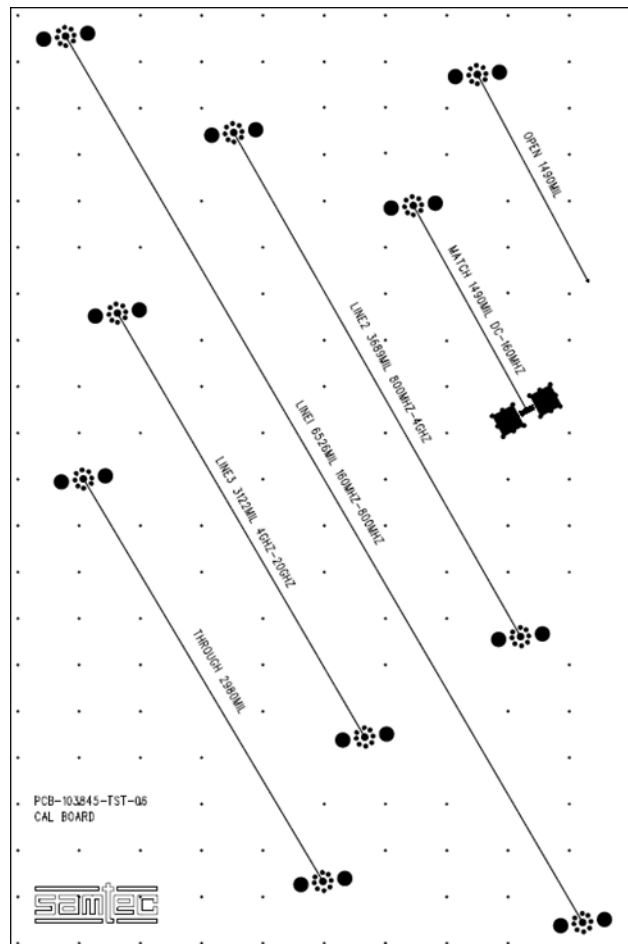

- Thru line – 2980 mils
- Open Reflect – 1490 mils
- Line 1 – 6526 mils
- Line 2 – 3689 mils
- Line 3 – 3122 mils
- Match – 1490 mils


Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

All traces on the test boards are length matched to 1.5" measured from the edge of the pad to the SMA. The TRL calibration effectively removes 1.490" of test board trace effects. This means that 10 mils of test board trace length effects are included in the measurement. The S-Parameter measurement includes:

- A- The SEAMP/SEAF-RA Series connector set
- B- Test board vias, pads (footprint effects)
- C- 10 mils of 9.5 mil wide microstrip trace

The figure below shows the location of the measurement reference plane.

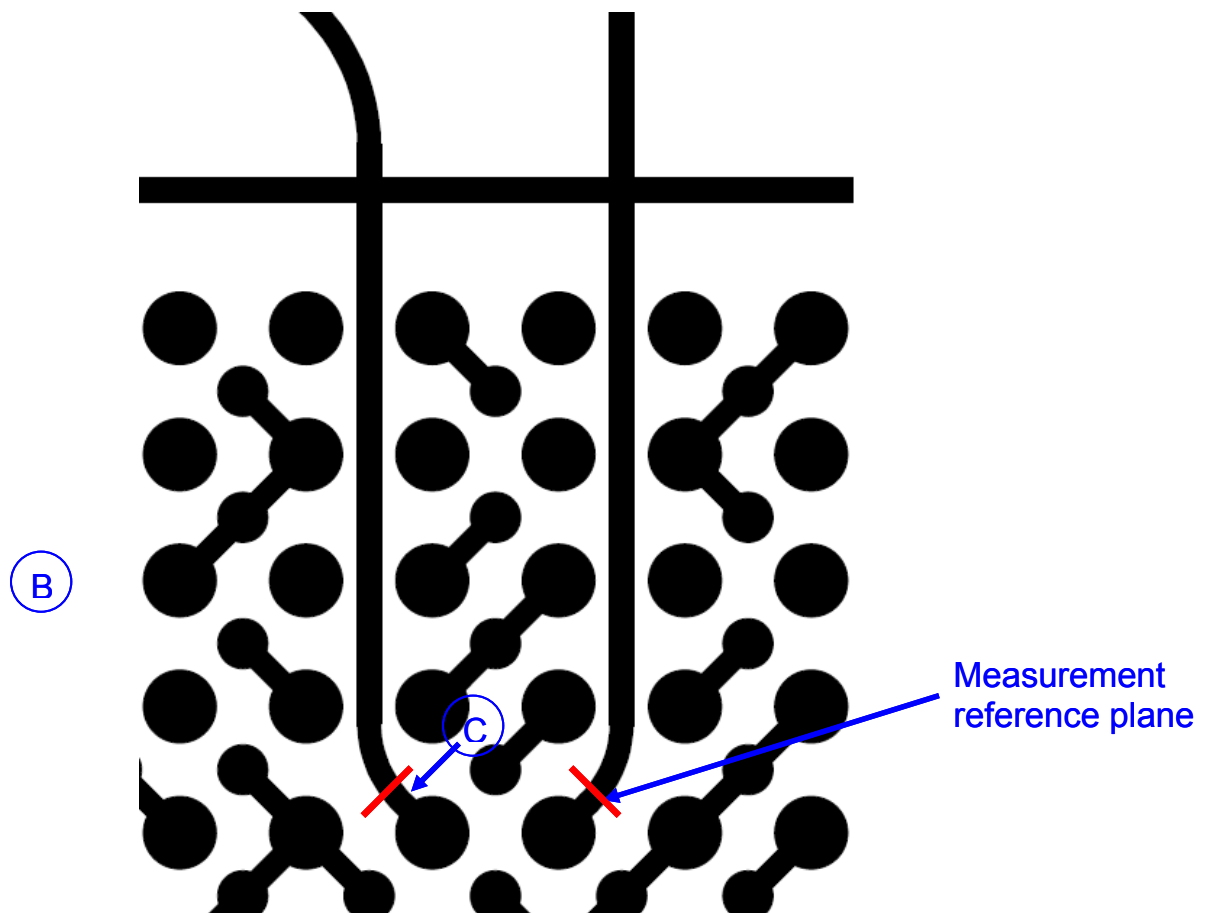

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Appendix D – Test and Measurement Setup

The test instrument is the Agilent N5230C PNA-L network analyzer. Frequency domain data and graphs are obtained directly from the instrument. Post-processed time domain data and graphs are generated using convolution algorithms within Agilent ADS. The network analyzer is configured as follows:

Start Frequency – 300 KHz

Stop Frequency – 20 GHz

Number of points -1601

IFBW – 1 KHz

With these settings, the measurement time is approximately 20 seconds.

N5230C Measurement Setup



Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Test Instruments

<u>QTY</u>	<u>Description</u>
------------	--------------------

- | | |
|---|---|
| 1 | Agilent N5230C PNA-L Network Analyzer (300 KHz to 20 GHz) |
| 1 | Agilent N4433A ecal module (300 KHz to 20 GHz) |

Test Cables & Adapters

<u>QTY</u>	<u>Description</u>
------------	--------------------

- | | |
|---|--------------------------------|
| 4 | Gore OWD01D02039-4 (DC-50 GHz) |
|---|--------------------------------|

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Appendix E - Frequency and Time Domain Measurements

Frequency (S-Parameter) Domain Procedures

The quality of any data taken with a network analyzer is directly related to the quality of the calibration standards and the use of proper test procedures. For this reason, extreme care is taken in the design of the LRM calibration standards, the SI test boards, and the selection of the PCB vendor.

The measurement process begins with a measurement of the LRM calibration standards. A coaxial SOLT calibration is performed using an N4433A ecal module. This measurement is required in order to obtain precise values of the line standard offset delay and frequency bandwidths. Measurements of the reflect and 2x through line standard can be used to determine the maximum frequency for which the calibration standards are valid. For the SEAMP/SEAF-RA Series test boards, this is greater than 20 GHz.

From the LRM calibration standard measurements, a user defined calibration kit is developed and stored in the network analyzer. Calibration is then performed on all 4 ports following the calibration wizard within the Agilent N5230C. This calibration is saved and can be recalled at any time. Calibration takes roughly 30 minutes to perform.

Time Domain Procedures

Mathematically, Frequency Domain data can be transformed to obtain a Time Domain response. Perfect transformation requires Frequency Domain data from DC to infinity Hz. Fortunately, a very accurate Time Domain response can be obtained with bandwidth-limited data, such as measured with modern network analyzer.

The Time Domain responses were generated using Agilent ADS 2011.05. This tool has a transient convolution simulator, which can generate a Time Domain response directly from measured S-Parameters. An example of a similar methodology is provided in the Samtec Technical Note on domain transformation.

http://www.samtec.com/Technical_Library/reference/articles/pdfs/tech-note_using-PLTS-for-time-domain-data_web.pdf

Impedance (TDR)

A step pulse is applied to the touchstone model of the connector and the reflected voltage is monitored. The reflected voltage is converted to a reflection coefficient and then transformed into an impedance profile. All ports of the Touchstone model are terminated in 50 ohms.

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Propagation Delay (TDT)

The Propagation Delay is a measure of the Time Domain delay through the connector and footprint. A step pulse is applied to the touchstone model of the connector and the transmitted voltage is monitored. The same pulse is also applied to a reference channel with zero loss, and the Time Domain pulses are plotted on the same graph. The difference in time, measured at the 50% point of the step voltage is the propagation delay.

Near-End Crosstalk (TDT) & Far End Crosstalk (TDT)

A step pulse is applied to the touchstone model of the connector and the coupled voltage is monitored. The amplitude of the peak-coupled voltage is recorded and reported as a percentage of the input pulse.

Series: SEAMP/SEAF-RA

Description: 1.27mm x 1.27mm grid interconnect system, Vertical (Press-Fit) to Right Angle

Appendix F – Glossary of Terms

ADS – Advanced Design Systems

BC – Best Case crosstalk configuration

DUT – Device under test, term used for TDA IConnect & Propagation Delay waveforms

FD – Frequency domain

FEXT – Far-End Crosstalk

GSG – Ground–Signal–Ground; geometric configuration

GSSG - Ground–Signal–Signal–Ground; geometric configuration

HDV – High Density Vertical

NEXT – Near-End Crosstalk

OV – Optimal Vertical

OH – Optimal Horizontal

PCB – Printed Circuit Board

PPO – Pin Population Option

SE – Single-Ended

SI – Signal Integrity

SUT – System Under Test

S – Static (independent of PCB ground)

SOLT – acronym used to define Short, Open, Load & Thru Calibration Standards

TD – Time Domain

TDA – Time Domain Analysis

TDR – Time Domain Reflectometry

TDT – Time Domain Transmission

WC – Worst Case crosstalk configuration

Z – Impedance (expressed in ohms)