




LOW-PROFILE SMT HEADER

(2.00 mm) .0787" PITCH • A-TMM SERIES

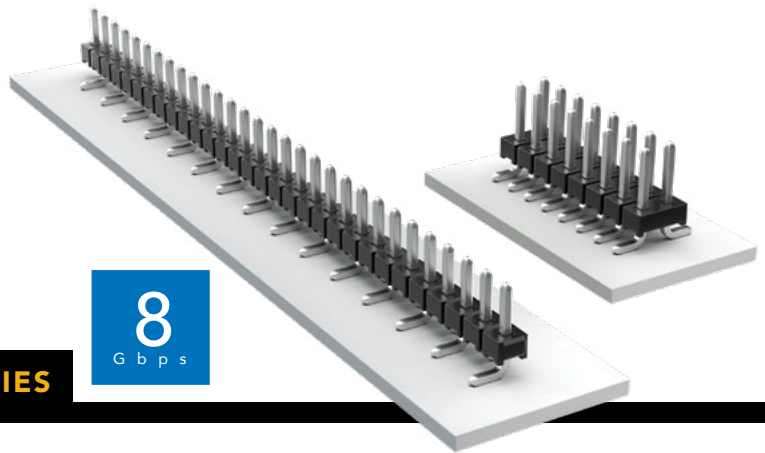

A-TMM

Board Mates:

A-CLT, A-SQT, A-SQW,
A-ESQT, A-SMM, A-MMS

SPECIFICATIONS

Insulator Material:

Black Liquid Crystal Polymer

Terminal Material:

Phosphor Bronze

Plating:

Sn or Au over
50 μ" (1.27 μm) Ni

Current Rating:

3.2 A per pin
(2 pins powered)

Operating Temp Range:

-55 °C to +105 °C with Tin;
-55 °C to +125 °C with Gold

Voltage Rating:

281 VAC mated with A-SQW;
250 VAC mated with A-SQT

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.15 mm) .006" max*
*(.004" stencil solution
may be available; contact
ipg@samtec.com)

A-TMM	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	SM	OTHER OPTION
--------------	----------	-------------------------	-------------------	-----------------------	-------------------	-----------	---------------------

02 thru 40

Specify
**LEAD
STYLE**
from
chart

-L
= 10 μ" (0.25 μm)
Gold on post,
Matte Tin on tail

-T
= Matte Tin



-S
= Single
Row

-D
= Double
Row

-A
= Alignment Pin
(Metal or plastic
at Samtec's
discretion)
(5 positions
minimum)
(-D only)




-P
= Pick &
Place Pad
(3 positions
minimum)

-TR
= Tape & Reel
(3 thru 36
positions only)

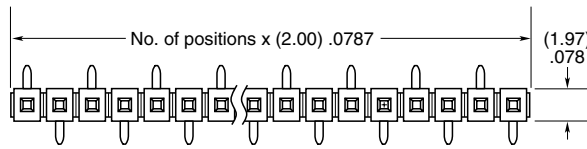

ALSO AVAILABLE

Other plating
(MOQ Required)

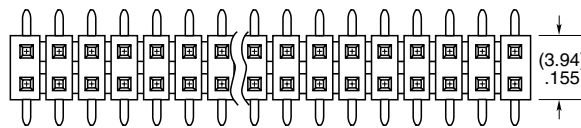

LEAD STYLE	A	MATES WITH
-01	(3.20) .126	A-SQT, A-SQW, A-ESQT, A-SMM, A-MMS
-04	(1.91) .075	A-CLT
-05	(1.65) .065	
-06	(4.27) .168	A-CLT-BE

Note:

Some lengths, styles and
options are non-standard,
non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.