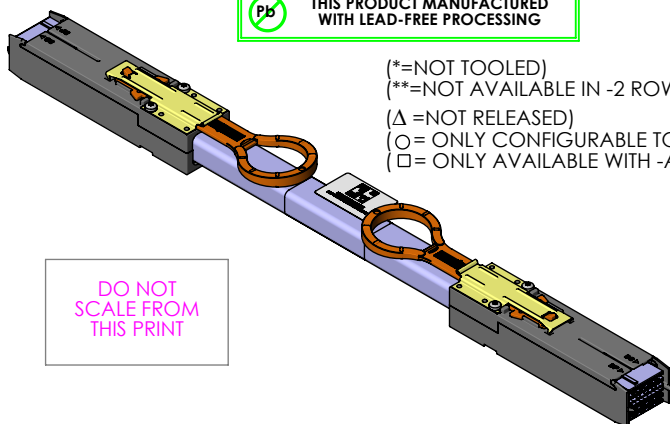


THIS PRODUCT MANUFACTURED
WITH LEAD-FREE PROCESSING

(* = NOT TOOLED)
(** = NOT AVAILABLE IN -2 ROW)
(Δ = NOT RELEASED)
(O = ONLY CONFIGURABLE TOGETHER)
(□ = ONLY AVAILABLE WITH -A: NVACE IN 8 ROW)

DO NOT
SCALE FROM
THIS PRINT

NVACE-XX-XX-X-X.X-X-X-X

SIGNAL TYPE

- DP: DIFFERENTIAL PAIRS ONLY
***-DS: MIXED DIFFERENTIAL TWINAX PAIRS
AND SINGLE ENDED COAX SIGNALS
-SE: SINGLE ENDED COAX SIGNALS ONLY

CABLE STYLE

- 1: 34100 (TwinAx)
-5: 28100 (TwinAx)
-6: 3450 (CoAx)
-9: 3450 (ThinSE)
Δ □ -10: 2892 (ThinAx)

ROWS

- *-2: 2 ROW
-4: 4 ROW
-8: 8 ROW

CABLE LENGTH

-X.X (METERS)
(0.5 METER MINIMUM)
(SEE NOTES 4 & 5)

APPLICATION SPEED



- 1: UP TO 128G PAM4
-2: (ECO)
(APPLICATION SPEED OPTIONS FOR
DIFFERENTIAL PAIR WAFERS ONLY.
LEAVE BLANK FOR -SE SIGNAL TYPE)

PIN OUT


- 1: PIN A01 TO PIN A01
(SEE PINOUT TABLE)
-4: PIN A01 TO PIN N01
(SEE PINOUT TABLE)
O -5: NVACE TO QSFP-DD
(SEE PINOUT TABLES)
O -6: NVACE TO QSFP
(SEE PINOUT TABLES)
O -7: NVACE TO OSFP
(SEE PINOUT TABLES)

END 2

- A: NVACE
O -B: QSFP-DD DAC
(AVAILABLE FOR -1:34100 CABLE STYLE)
O -C: QSFP
(AVAILABLE FOR -1:34100 CABLE STYLE)
O -D: OSFP
(AVAILABLE FOR -1:34100, Δ-5: 28100 CABLE STYLE)

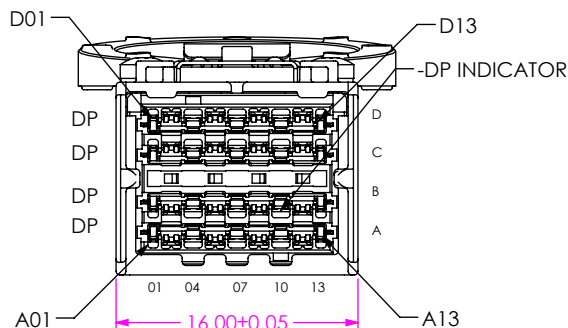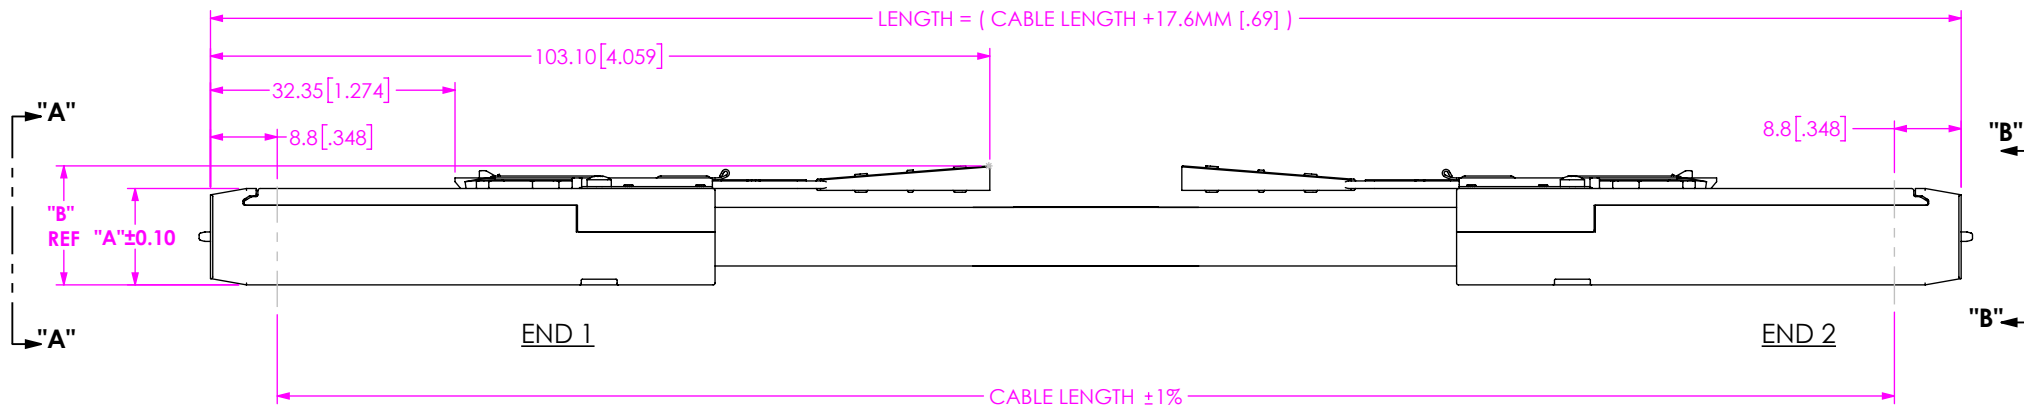

VIEW "A"- "A"

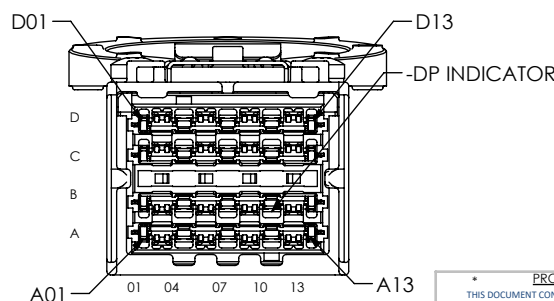

VIEW "B"- "B"

FIG 1
NVACE-DP-XX-4-X-X-A-X-1 SHOWN

NOTES:

1. ALL ASSEMBLIES TO BE 100% HI-POT TESTED AT 300V.
2. ALL ASSEMBLIES TO BE 100% ELECTRICALLY TESTED FOR SHORTS AND OPENS.
3. NOTE DELETED.
4. CABLE LENGTHS LONGER THAN 3 METERS[118 INCHES] ARE NOT SUPPORTED BY S.I. TEST DATA.
5. MAX STANDARD CABLE LENGTH IS 5 METERS. FOR LENGTHS GREATER THAN 5 METERS, CONTACT HDR@SAMTEC.COM.

F:\DWG\SW\Exisprod\Assembly\lo\NVACE-XX-XX-X-X-X-X-X.slddrw

TABLE 1

ROW	"A"	"B"
-2	8.75 [0.344]	13.00 [0.512]
-4	12.75 [0.502]	17.00 [0.669]
-8	20.75 [0.817]	25.00 [0.984]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING
SHEET SCALE: 2:1
MATERIAL:
INSULATOR: LCP, BLACK
CONTACTS: CU ALLOY
GROUND PLANE: CU ALLOY
PLATING: 30 μ" GOLD IN CONTACT AREA

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:

NVACE ASSEMBLY

DWG. NO.

NVACE-XX-XX-X-X.X-X-X-X

BY:KNOWLDEN 02/07/2020 SHEET 1 OF 8

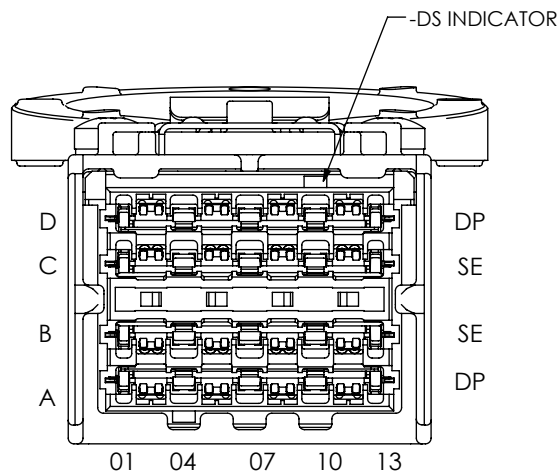
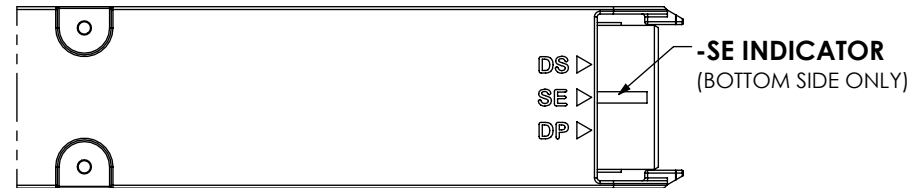
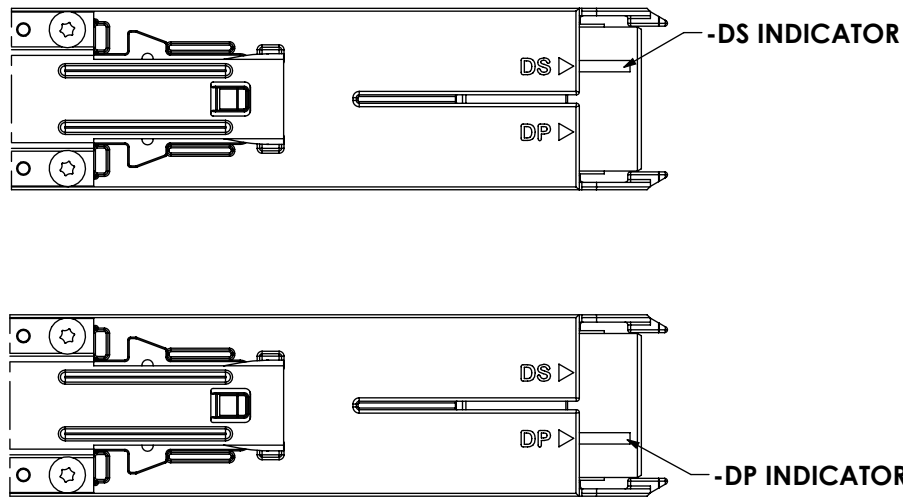


FIG 2
NVACE-DS-XX-4-X.X-A-X-1
(SAME AS FIG 1, EXCEPT AS SHOWN)



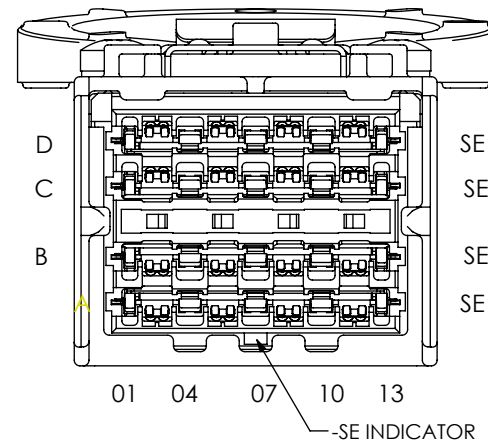


FIG 3
NVACE-SE-XX-4-X.X-A-X-1
(SAME AS FIG 1, EXCEPT AS SHOWN)

• PROPRIETARY NOTE • THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.	
DO NOT SCALE DRAWING SHEET SCALE: 2:1	 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code 55322
	DESCRIPTION: NVACE ASSEMBLY
	DWG. NO. NVACE-XX-XX-X.X-X-X-X-X
BY: KNOWLDEN 02/07/2020 SHEET 2 OF 8	

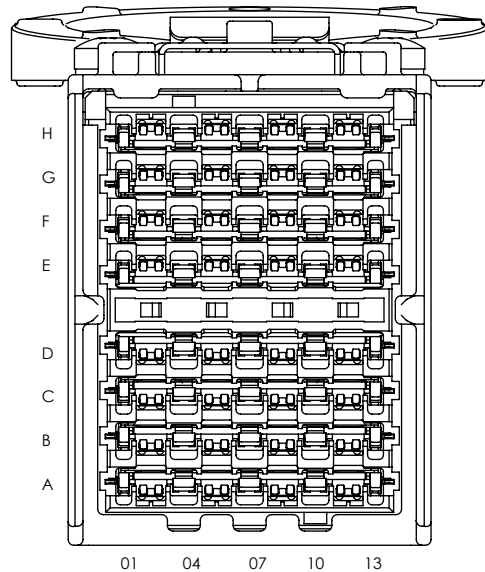

J1
(NVACE)

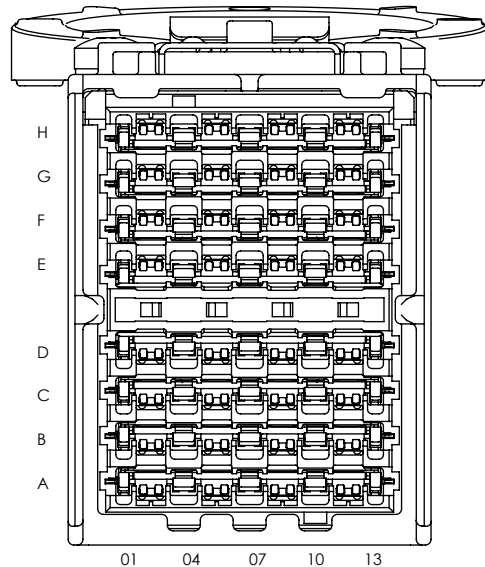

J2
(NVACE)

PINOUT TABLE - BOTTOM

SIGNAL MAPPING FOR NVACE-XX-XX-08-X.X-A-1-X

J1	SIGNAL TYPE			J2	J1	SIGNAL TYPE			J2	J1	SIGNAL TYPE			J2	J1	SIGNAL TYPE			J2
	-DP	-DS	-SE			-DP	-DS	-SE			-DP	-DS	-SE			-DP	-DS	-SE	
A 01		GND		A 01	B 01		GND		B 01	C 01		GND		C 01	D 01		GND		D 01
A 02	TX1+	TX1+	LS1	A 02	B 02	TX5+	TX5+	LS9	B 02	C 02	TX9+	LS1	LS17	C 02	D 02	TX13+	LS9	LS25	D 02
A 03	TX1-	TX1-	LS2	A 03	B 03	TX5-	TX5-	LS10	B 03	C 03	TX9-	LS2	LS18	C 03	D 03	TX13-	LS10	LS26	D 03
A 04		GND		A 04	B 04		GND		B 04	C 04		GND		C 04	D 04		GND		D 04
A 05	TX2+	TX2+	LS3	A 05	B 05	TX6+	TX6+	LS11	B 05	C 05	TX10+	LS3	LS19	C 05	D 05	TX14+	LS11	LS27	D 05
A 06	TX2-	TX2-	LS4	A 06	B 06	TX6-	TX6-	LS12	B 06	C 06	TX10-	LS4	LS20	C 06	D 06	TX14-	LS12	LS28	D 06
A 07		GND		A 07	B 07		GND		B 07	C 07		GND		C 07	D 07		GND		D 07
A 08	TX3+	TX3+	LS5	A 08	B 08	TX7+	TX7+	LS13	B 08	C 08	TX11+	LS5	LS21	C 08	D 08	TX15+	LS13	LS29	D 08
A 09	TX3-	TX3-	LS6	A 09	B 09	TX7-	TX7-	LS14	B 09	C 09	TX11-	LS6	LS22	C 09	D 09	TX15-	LS14	LS30	D 09
A 10		GND		A 10	B 10		GND		B 10	C 10		GND		C 10	D 10		GND		D 10
A 11	TX4+	TX4+	LS7	A 11	B 11	TX8+	TX8+	LS15	B 11	C 11	TX12+	LS7	LS23	C 11	D 11	TX16+	LS15	LS31	D 11
A 12	TX4-	TX4-	LS8	A 12	B 12	TX8-	TX8-	LS16	B 12	C 12	TX12-	LS8	LS24	C 12	D 12	TX16-	LS16	LS32	D 12
A 13		GND		A 13	B 13		GND		B 13	C 13		GND		C 13	D 13		GND		D 13

ALL GROUNDS ARE COMMON AND CONNECTED TO CABLE SHIELD

PINOUT TABLE - TOP

SIGNAL MAPPING FOR NVACE-XX-XX-08-X.X-A-1-X

J1	SIGNAL TYPE			J2	J1	SIGNAL TYPE			J2	J1	SIGNAL TYPE			J2	J1	SIGNAL TYPE			J2
	-DP	-DS	-SE			-DP	-DS	-SE			-DP	-DS	-SE			-DP	-DS	-SE	
E 01		GND		E 01	F 01		GND		F 01	G 01		GND		G 01	H 01		GND		H 01
E 02	RX1+	LS17	LS33	E 02	F 02	RX5+	LS25	LS41	F 02	G 02	RX9+	RX1+	LS49	G 02	H 02	RX13+	RX5+	LS57	H 02
E 03	RX1-	LS18	LS34	E 03	F 03	RX5-	LS26	LS42	F 03	G 03	RX9-	RX1-	LS50	G 03	H 03	RX13-	RX5-	LS58	H 03
E 04		GND		E 04	F 04		GND		F 04	G 04		GND		G 04	H 04		GND		H 04
E 05	RX2+	LS19	LS35	E 05	F 05	RX6+	LS27	LS43	F 05	G 05	RX10+	RX2+	LS51	G 05	H 05	RX14+	RX6+	LS59	H 05
E 06	RX2-	LS20	LS36	E 06	F 06	RX6-	LS28	LS44	F 06	G 06	RX10-	RX2-	LS52	G 06	H 06	RX14-	RX6-	LS60	H 06
E 07		GND		E 07	F 07		GND		F 07	G 07		GND		G 07	H 07		GND		H 07
E 08	RX3+	LS21	LS37	E 08	F 08	RX7+	LS29	LS45	F 08	G 08	RX11+	RX3+	LS53	G 08	H 08	RX15+	RX7+	LS61	H 08
E 09	RX3-	LS22	LS38	E 09	F 09	RX7-	LS30	LS46	F 09	G 09	RX11-	RX3-	LS54	G 09	H 09	RX15-	RX7-	LS62	H 09
E 10		GND		E 10	F 10		GND		F 10	G 10		GND		G 10	H 10		GND		H 10
E 11	RX4+	LS23	LS39	E 11	F 11	RX8+	LS31	LS47	F 11	G 11	RX12+	RX4+	LS55	G 11	H 11	RX16+	RX8+	LS63	H 11
E 12	RX4-	LS24	LS40	E 12	F 12	RX8-	LS32	LS48	F 12	G 12	RX12-	RX4-	LS56	G 12	H 12	RX16-	RX8-	LS64	H 12
E 13		GND		E 13	F 13		GND		F 13	G 13		GND		G 13	H 13		GND		H 13

ALL GROUNDS ARE COMMON AND CONNECTED TO CABLE SHIELD

* PROPRIETARY NOTE *

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:

NVACE ASSEMBLY


DWG. NO.

NVACE-XX-XX-X.X-X-X-X

BY: KNOWLDEN02/07/2020

SHEET 4 OF 8

PINOUT TABLE - BOTTOM																							
SIGNAL MAPPING FOR NVACE-XX-XX-08-X.X-A-4-X																							
J1		SIGNAL TYPE			J2	J1		SIGNAL TYPE			J2	J1		SIGNAL TYPE			J2	J1		SIGNAL TYPE			J2
		-DP	-DS	-SE				-DP	-DS	-SE				-DP	-DS	-SE				-DP	-DS	-SE	
A 01		GND			H 01	B 01		GND			G 01	C 01		GND			F 01	D 01		GND			E 01
A 02		TX1+	TX1+	LS1	H 02	B 02		TX5+	TX5+	LS9	G 02	C 02		TX9+	LS1	LS17	F 02	D 02		TX13+	LS9	LS25	E 02
A 03		TX1-	TX1-	LS2	H 03	B 03		TX5-	TX5-	LS10	G 03	C 03		TX9-	LS2	LS18	F 03	D 03		TX13-	LS10	LS26	E 03
A 04		GND			H 04	B 04		GND			G 04	C 04		GND			F 04	D 04		GND			E 04
A 05		TX2+	TX2+	LS3	H 05	B 05		TX6+	TX6+	LS11	G 05	C 05		TX10+	LS3	LS19	F 05	D 05		TX14+	LS11	LS27	E 05
A 06		TX2-	TX2-	LS4	H 06	B 06		TX6-	TX6-	LS12	G 06	C 06		TX10-	LS4	LS20	F 06	D 06		TX14-	LS12	LS28	E 06
A 07		GND			H 07	B 07		GND			G 07	C 07		GND			F 07	D 07		GND			E 07
A 08		TX3+	TX3+	LS5	H 08	B 08		TX7+	TX7+	LS13	G 08	C 08		TX11+	LS5	LS21	F 08	D 08		TX15+	LS13	LS29	E 08
A 09		TX3-	TX3-	LS6	H 09	B 09		TX7-	TX7-	LS14	G 09	C 09		TX11-	LS6	LS22	F 09	D 09		TX15-	LS14	LS30	E 09
A 10		GND			H 10	B 10		GND			G 10	C 10		GND			F 10	D 10		GND			E 10
A 11		TX4+	TX4+	LS7	H 11	B 11		TX8+	TX8+	LS15	G 11	C 11		TX12+	LS7	LS23	F 11	D 11		TX16+	LS15	LS31	E 11
A 12		TX4-	TX4-	LS8	H 12	B 12		TX8-	TX8-	LS16	G 12	C 12		TX12-	LS8	LS24	F 12	D 12		TX16-	LS16	LS32	E 12
A 13		GND			H 13	B 13		GND			G 13	C 13		GND			F 13	D 13		GND			E 13
ALL GROUNDS ARE COMMON AND CONNECTED TO CABLE SHIELD																							

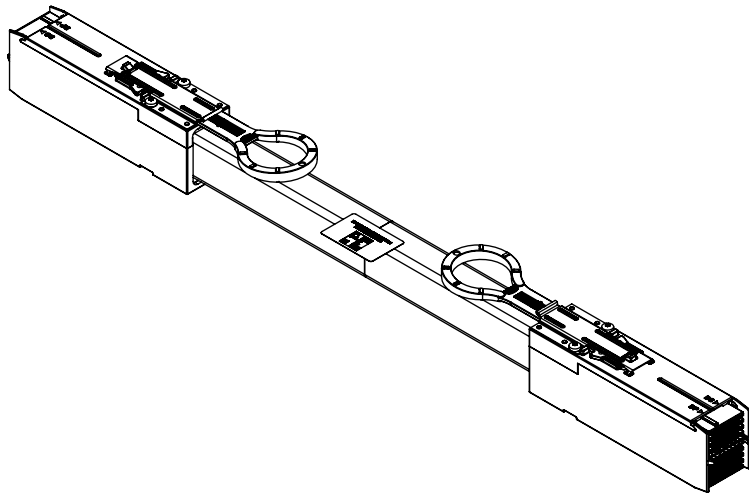

PINOUT TABLE - TOP																							
SIGNAL MAPPING FOR NVACE-XX-XX-08-X.X-A-4-X																							
J1		SIGNAL TYPE			J2	J1		SIGNAL TYPE			J2	J1		SIGNAL TYPE			J2	J1		SIGNAL TYPE			J2
		-DP	-DS	-SE				-DP	-DS	-SE				-DP	-DS	-SE				-DP	-DS	-SE	
E 01		GND			D 01	F 01		GND			C 01	G 01		GND			B 01	H 01		GND			A 01
E 02		RX1+	LS17	LS33	D 02	F 02		RX5+	LS25	LS41	C 02	G 02		RX9+	RX1+	LS49	B 02	H 02		RX13+	RX5+	LS57	A 02
E 03		RX1-	LS18	LS34	D 03	F 03		RX5-	LS26	LS42	C 03	G 03		RX9-	RX1-	LS50	B 03	H 03		RX13-	RX5-	LS58	A 03
E 04		GND			D 04	F 04		GND			C 04	G 04		GND			B 04	H 04		GND			A 04
E 05		RX2+	LS19	LS35	D 05	F 05		RX6+	LS27	LS43	C 05	G 05		RX10+	RX2+	LS51	B 05	H 05		RX14+	RX6+	LS59	A 05
E 06		RX2-	LS20	LS36	D 06	F 06		RX6-	LS28	LS44	C 06	G 06		RX10-	RX2-	LS52	B 06	H 06		RX14-	RX6-	LS60	A 06
E 07		GND			D 07	F 07		GND			C 07	G 07		GND			B 07	H 07		GND			A 07
E 08		RX3+	LS21	LS37	D 08	F 08		RX7+	LS29	LS45	C 08	G 08		RX11+	RX3+	LS53	B 08	H 08		RX15+	RX7+	LS61	A 08
E 09		RX3-	LS22	LS38	D 09	F 09		RX7-	LS30	LS46	C 09	G 09		RX11-	RX3-	LS54	B 09	H 09		RX15-	RX7-	LS62	A 09
E 10		GND			D 10	F 10		GND			C 10	G 10		GND			B 10	H 10		GND			A 10
E 11		RX4+	LS23	LS39	D 11	F 11		RX8+	LS31	LS47	C 11	G 11		RX12+	RX4+	LS55	B 11	H 11		RX16+	RX8+	LS63	A 11
E 12		RX4-	LS24	LS40	D 12	F 12		RX8-	LS32	LS48	C 12	G 12		RX12-	RX4-	LS56	B 12	H 12		RX16-	RX8-	LS64	A 12
E 13		GND			D 13	F 13		GND			C 13	G 13		GND			B 13	H 13		GND			A 13
ALL GROUNDS ARE COMMON AND CONNECTED TO CABLE SHIELD																							

* PROPRIETARY NOTE *
 THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

samtec
 520 PARK EAST BLVD, NEW ALBANY, IN 47150
 PHONE: 812-944-6733 FAX: 812-948-5047
 e-Mail: info@SAMTEC.com code 55322

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

DESCRIPTION:



NVACE ASSEMBLY

DWG. NO.


NVACE-XX-XX-X.X-X-X-X

BY: KNOWLDEN02/07/2020


SHEET 5 OF 8

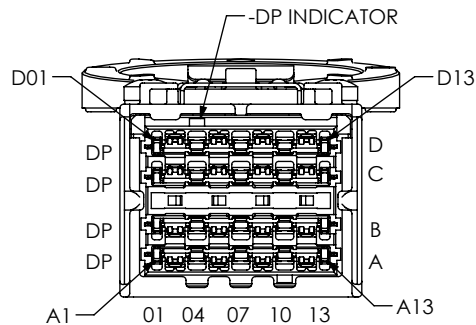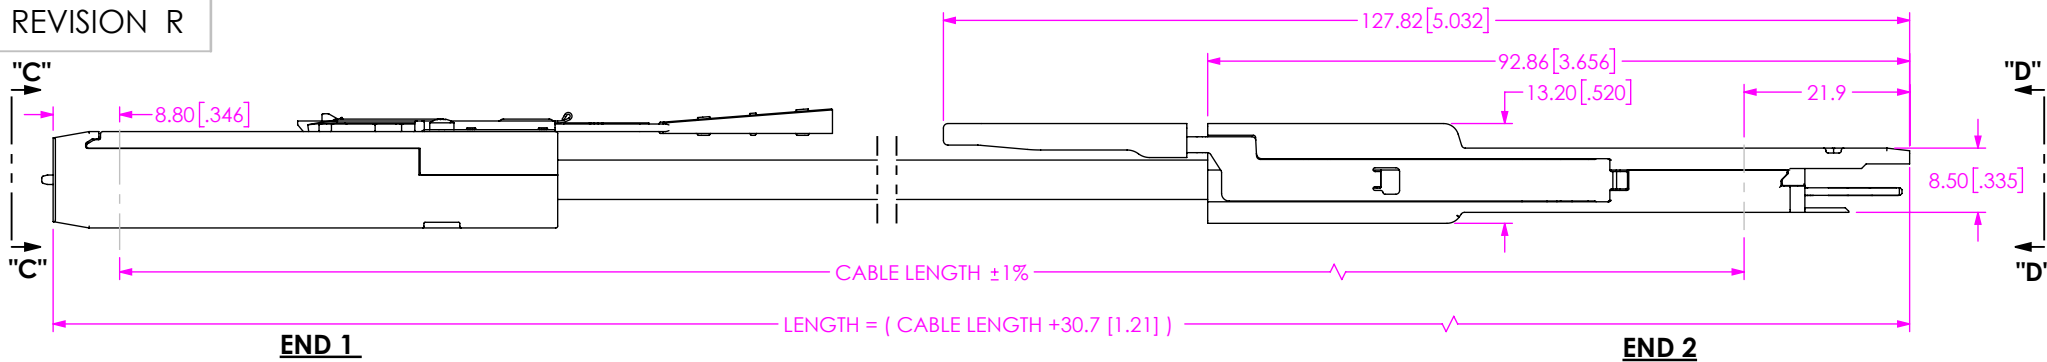

END 2 NOT SHOWN FOR CLARITY
VIEW "C"-"C"

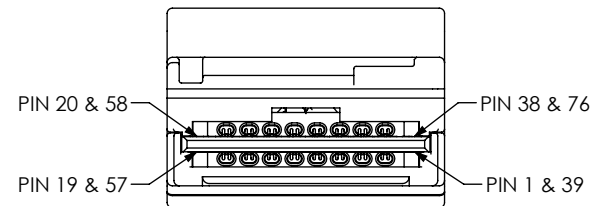

END 1 NOT SHOWN FOR CLARITY
VIEW "D"-"D"

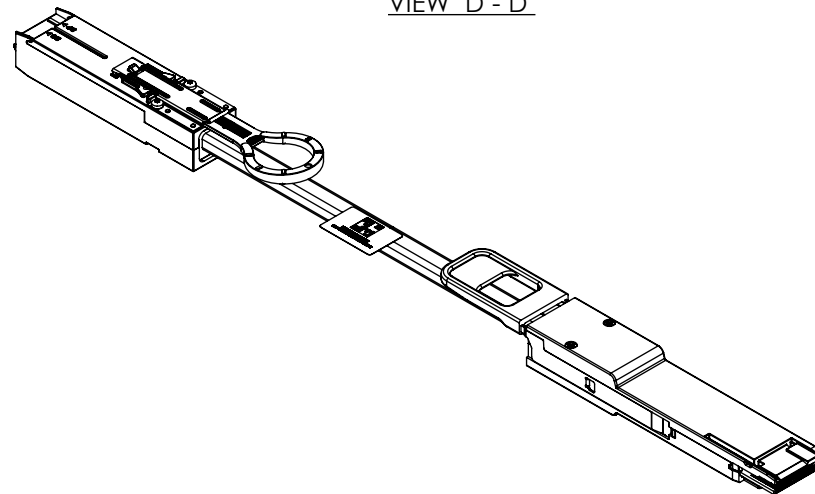

PINOUT TABLE

SIGNAL MAPPING FOR NVACE-DP-XX-4-X-X-B-5-X

J1	SIGNAL TYPE -DP	J2	J1	SIGNAL TYPE -DP	J2	J1	SIGNAL TYPE -DP	J2	J1	SIGNAL TYPE -DP	J2
A 01	GND	*2	B 01	GND	*2	C 01	GND	*2	D 01	GND	*2
A 02	TX1+	P36	B 02	TX5+	P74	C 02	RX1+	P17	D 02	RX5+	P55
A 03	TX1-	P37	B 03	TX5-	P75	C 03	RX1-	P18	D 03	RX5-	P56
A 04	GND	*2	B 04	GND	*2	C 04	GND	*2	D 04	GND	*2
A 05	TX2+	P03	B 05	TX6+	P41	C 05	RX2+	P22	D 05	RX6+	P60
A 06	TX2-	P02	B 06	TX6-	P40	C 06	RX2-	P21	D 06	RX6-	P59
A 07	GND	*2	B 07	GND	*2	C 07	GND	*2	D 07	GND	*2
A 08	TX3+	P33	B 08	TX7+	P71	C 08	RX3+	P14	D 08	RX7+	P52
A 09	TX3-	P34	B 09	TX7-	P72	C 09	RX3-	P15	D 09	RX7-	P53
A 10	GND	*2	B 10	GND	*2	C 10	GND	*2	D 10	GND	*2
A 11	TX4+	P06	B 11	TX8+	P44	C 11	RX4+	P25	D 11	RX8+	P63
A 12	TX4-	P05	B 12	TX8-	P43	C 12	RX4-	P24	D 12	RX8-	P62
A 13	GND	*2	B 13	GND	*2	C 13	GND	*2	D 13	GND	*2

1: ALL LIKE NEMED GROUNDS ARE COMMON AND TIED TO CABLE SHIELD.

* 2: GROUND PIN @J2 ARE: P1, 4, 7, 13, 16, 19, 20, 23, 26, 32, 35, 38, 39, 42, 48, 51, 54, 57, 58, 61, 64, 70, 73, 76.

3: @J2,P8~12 / P27~31 / P46~50 / P65~69 ARE NC TO J1.

4: ALL NC NETS DO NOT TRANSMIT THROUGH CABLE, THEY WILL ROUTE THROUGH CUSTOMER PCB.

5: ON THE MATING BOARD ASSEMBLY, SAMTEC RECOMMENDS IMPLEMENTING A GND REFERENCE TYPING ALL GND'S TOGETHER.

F:\DWG\SW\Exisprod\Assembly\lo\NVACE-XX-XX-X-X-X-X-X-X.slddrw

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

DESCRIPTION:



NVACE ASSEMBLY

DWG. NO.

NVACE-XX-XX-X-X-X-X-X-X


BY: KNOWLDEN02/07/2020

SHEET 6 OF 8

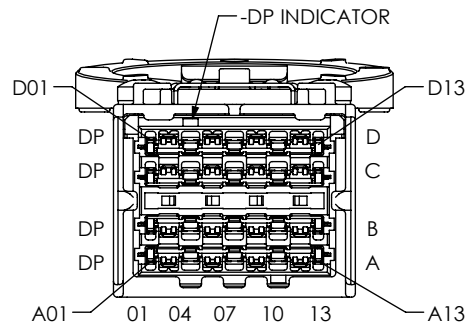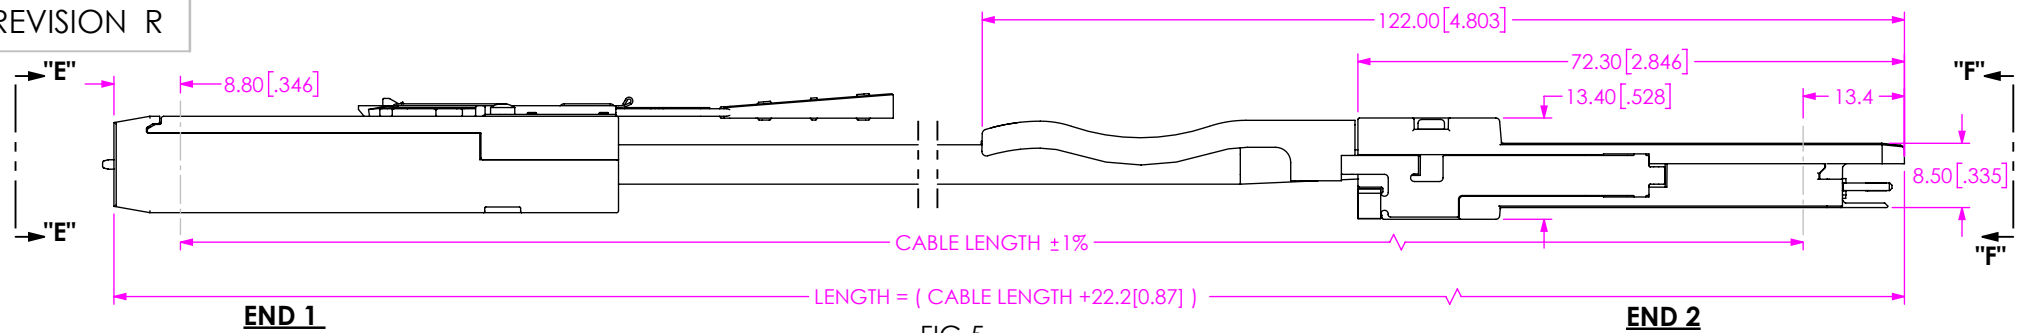


END 2 NOT SHOWN FOR CLARITY

VIEW "E"-"E"

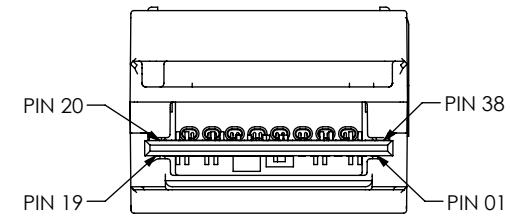

END 1 NOT SHOWN FOR CLARITY

VIEW "F"-"F"

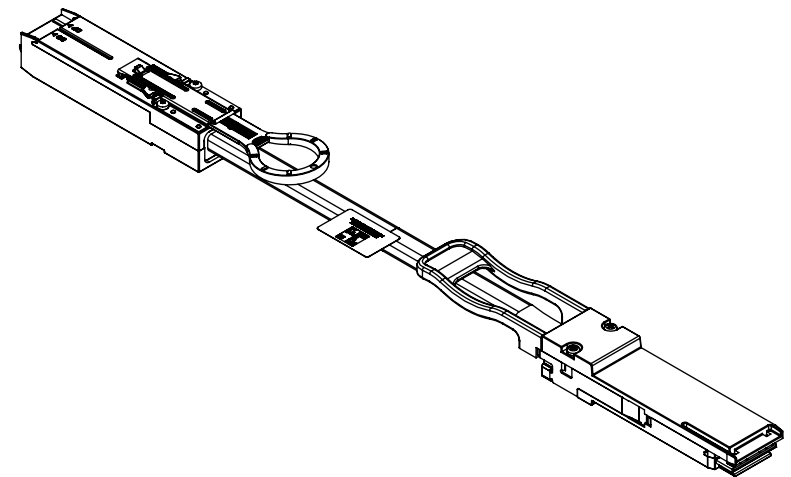

F:\DWG\SW\Exisprod\Assembly\lo\NVACE-XX-XX-X.X-X-X-X.slddrw

PINOUT TABLE

SIGNAL MAPPING FOR NVACE-DP-XX-4-X.X-C-6-X

J1	SIGNAL TYPE -DP	J2	J1	SIGNAL TYPE -DP	J2	J1	SIGNAL TYPE -DP	J2	J1	SIGNAL TYPE -DP	J2
A 01	GND	*2	B 01	GND	*2	C 01	GND	*2	D 01	GND	*2
A 02	TX1+	P36	B 02	TX5+	NC	C 02	RX1+	P17	D 02	RX5+	NC
A 03	TX1-	P37	B 03	TX5-	NC	C 03	RX1-	P18	D 03	RX5-	NC
A 04	GND	*2	B 04	GND	*2	C 04	GND	*2	D 04	GND	*2
A 05	TX2+	P03	B 05	TX6+	NC	C 05	RX2+	P22	D 05	RX6+	NC
A 06	TX2-	P02	B 06	TX6-	NC	C 06	RX2-	P21	D 06	RX6-	NC
A 07	GND	*2	B 07	GND	*2	C 07	GND	*2	D 07	GND	*2
A 08	TX3+	P33	B 08	TX7+	NC	C 08	RX3+	P14	D 08	RX7+	NC
A 09	TX3-	P34	B 09	TX7-	NC	C 09	RX3-	P15	D 09	RX7-	NC
A 10	GND	*2	B 10	GND	*2	C 10	GND	*2	D 10	GND	*2
A 11	TX4+	P06	B 11	TX8+	NC	C 11	RX4+	P25	D 11	RX8+	NC
A 12	TX4-	P05	B 12	TX8-	NC	C 12	RX4-	P24	D 12	RX8-	NC
A 13	GND	*2	B 13	GND	*2	C 13	GND	*2	D 13	GND	*2

1: ALL LIKE NEMED GROUNDS ARE COMMON AND TIED TO CABLE SHIELD.

* 2: GROUND PIN @J2 ARE: P1, 4, 7, 13, 16, 19, 20, 23, 26, 32, 35, 38

3: @J2,P8~P12, P27~P31 ARE NC TO J1.

4: ALL NC NETS DO NOT TRANSMIT THROUGH CABLE, THEY WILL ROUTE THROUGH CUSTOMER PCB.

5: ON THE MATING BOARD ASSEMBLY, SAMTEC RECOMMENDS IMPLEMENTING A GND REFERENCE TYING ALL GND'S TOGETHER.

* PROPRIETARY NOTE *

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING



SHEET SCALE: 2:1

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION: NVACE ASSEMBLY


DWG. NO. NVACE-XX-XX-X.X-X-X-X-X

BY: KNOWLDEN02/07/2020 SHEET 7 OF 8

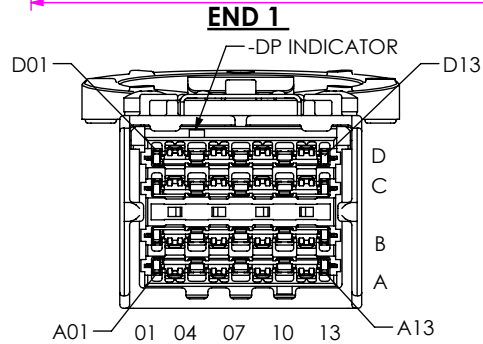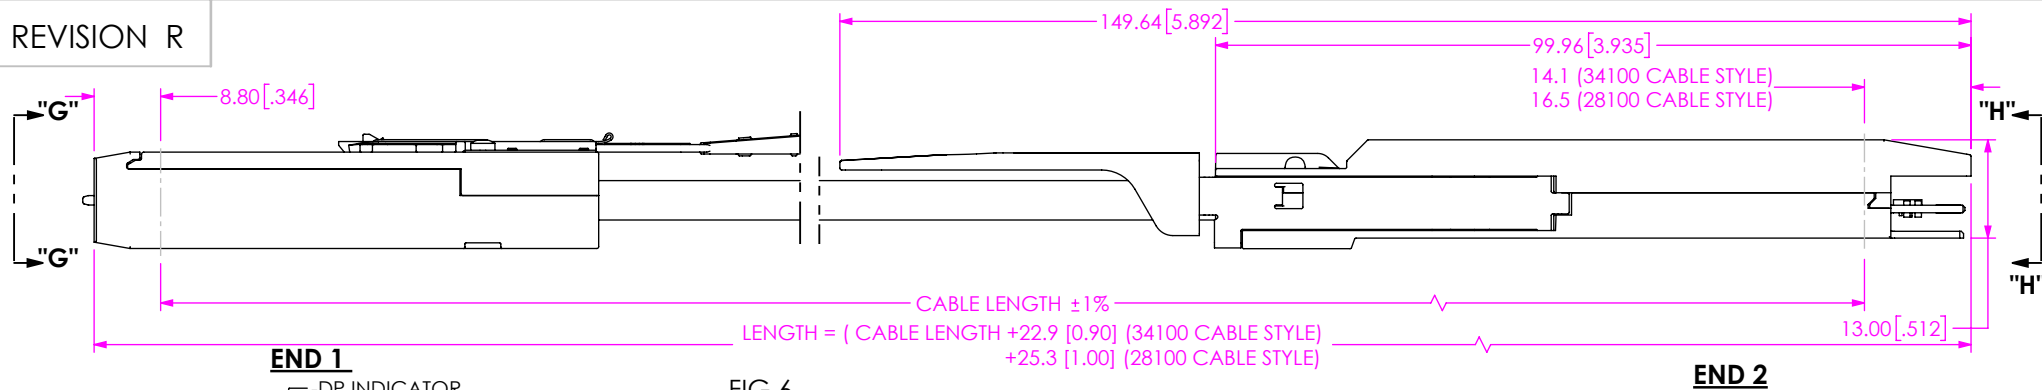


END 2 NOT SHOWN FOR CLARITY
VIEW "G"-"G"


FIG 6
NVACE-DP-XX-4-X-X-D-7-X SHOWN
(SAME AS FIG 1, EXCEPT AS SHOWN)

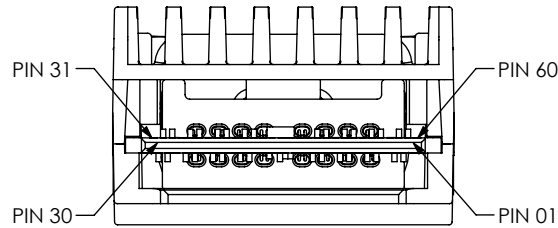

END 1 NOT SHOWN FOR CLARITY
VIEW "H"-"H"
(FOR -1: 34100 CABLE STYLE)

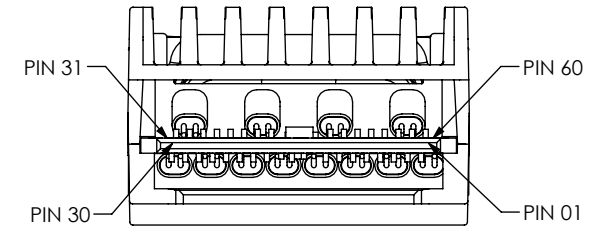

END 1 NOT SHOWN FOR CLARITY
VIEW "H"-"H"
(FOR -5: 28100 CABLE STYLE)

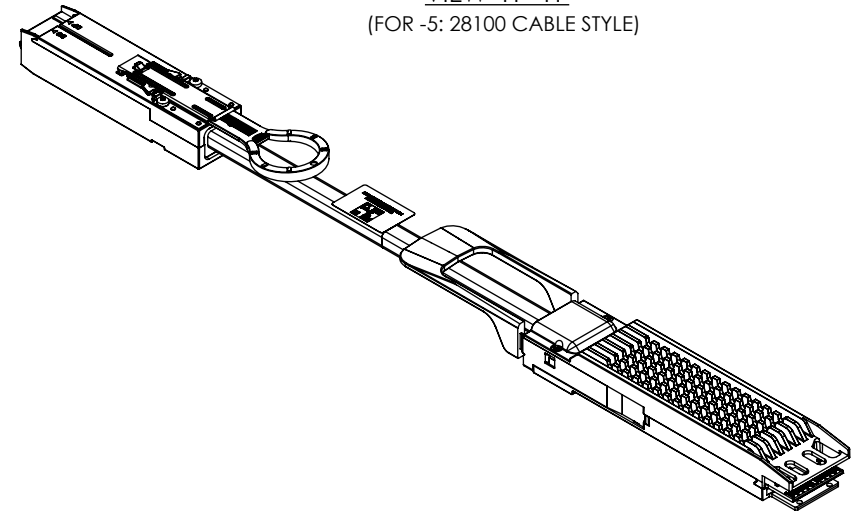

F:\DWG\SW\Exisprod\Assembly\lo\NVACE-XX-XX-X-X-X-X-X.sldrw

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

DESCRIPTION:

NVACE ASSEMBLY

DWG. NO.

NVACE-XX-XX-X-X-X-X-X-X

BY: KNOWLDEN02/07/2020

SHEET 8 OF 8

PINOUT TABLE

SIGNAL MAPPING FOR NVACE-DP-XX-4-X-X-D-7-X

J1	SIGNAL TYPE	J2	J1	SIGNAL TYPE	J2	J1	SIGNAL TYPE	J2	J1	SIGNAL TYPE	J2
	-DP			-DP			-DP			-DP	
A 01	GND	*2	B 01	GND	*2	C 01	GND	*2	D 01	GND	*2
A 02	TX1+	P59	B 02	TX5+	P53	C 02	RX1+	P29	D 02	RX5+	P23
A 03	TX1-	P58	B 03	TX5-	P52	C 03	RX1-	P28	D 03	RX5-	P22
A 04	GND	*2	B 04	GND	*2	C 04	GND	*2	D 04	GND	*2
A 05	TX2+	P02	B 05	TX6+	P08	C 05	RX2+	P32	D 05	RX6+	P38
A 06	TX2-	P03	B 06	TX6-	P09	C 06	RX2-	P33	D 06	RX6-	P39
A 07	GND	*2	B 07	GND	*2	C 07	GND	*2	D 07	GND	*2
A 08	TX3+	P56	B 08	TX7+	P50	C 08	RX3+	P26	D 08	RX7+	P20
A 09	TX3-	P55	B 09	TX7-	P49	C 09	RX3-	P25	D 09	RX7-	P19
A 10	GND	*2	B 10	GND	*2	C 10	GND	*2	D 10	GND	*2
A 11	TX4+	P05	B 11	TX8+	P11	C 11	RX4+	P35	D 11	RX8+	P41
A 12	TX4-	P06	B 12	TX8-	P12	C 12	RX4-	P36	D 12	RX8-	P42
A 13	GND	*2	B 13	GND	*2	C 13	GND	*2	D 13	GND	*2

1: ALL LIKE NEMED GROUNDS ARE COMMON AND TIED TO CABLE SHIELD.

* 2: GROUND PIN @J2 ARE P1, 4, 7, 10, 13, 18, 21, 24, 27, 30, 31, 34, 37, 40, 43, 48, 51, 54, 57, 60

3: @J2, P14~P17 / P44~P47 ARE NC TO J1.

4: ALL NC NETS DO NOT TRANSMIT THROUGH CABLE, THEY WILL ROUTE THROUGH CUSTOMER PCB.

5: ON THE MATING BOARD ASSEMBLY, SAMTEC RECOMMENDS IMPLEMENTING A GND REFERENCE TYPING ALL GND'S TOGETHER.