




# PCI EXPRESS®-OVER-FIBER ADAPTOR CARD

## ADAPTOR CARD WITH FIREFLY™ OPTICAL SYSTEM

PCI Express®-Over-Fiber Adaptor Card features Samtec's PCI Express®-Over-Fiber FireFly™ optical cable solution with key features to enable clear signal transmission with increased reach and cost optimization. By supporting the PCIe® 3.0/4.0 protocol, the adaptor card delivers high data transfer rates with low latency, power management and guaranteed transmission.

- PCIe® x16 edge card connector
- Supports PCIe® 3.0/4.0 platform
- Scalable configurations for cost optimized performance
  - x4: single, dual or quad
  - x8: single or dual
  - x16: single
- Transparent or non-transparent bridging for system flexibility and multi-processor support
- Easy migration into existing and new architectures with a half-height PCIe® card
- Reconfigurable host or target operation
- Enables computer-to-computer or computer-to-endpoint over long distances
- Features PCI Express®-Over-Fiber FireFly™ optical cable assemblies (PCUO Series)
  - Enables lengths to 100 meters
  - Bidirectional sidebands for reset and cable present
  - Miniature footprint enables smaller endpoints
  - Galvanic isolation for high voltage systems
- Ideal for high-performance and data quality applications: AI and HPC, rugged embedded computing, video broadcast, machine vision, optical inspection, data acquisition and factory automation

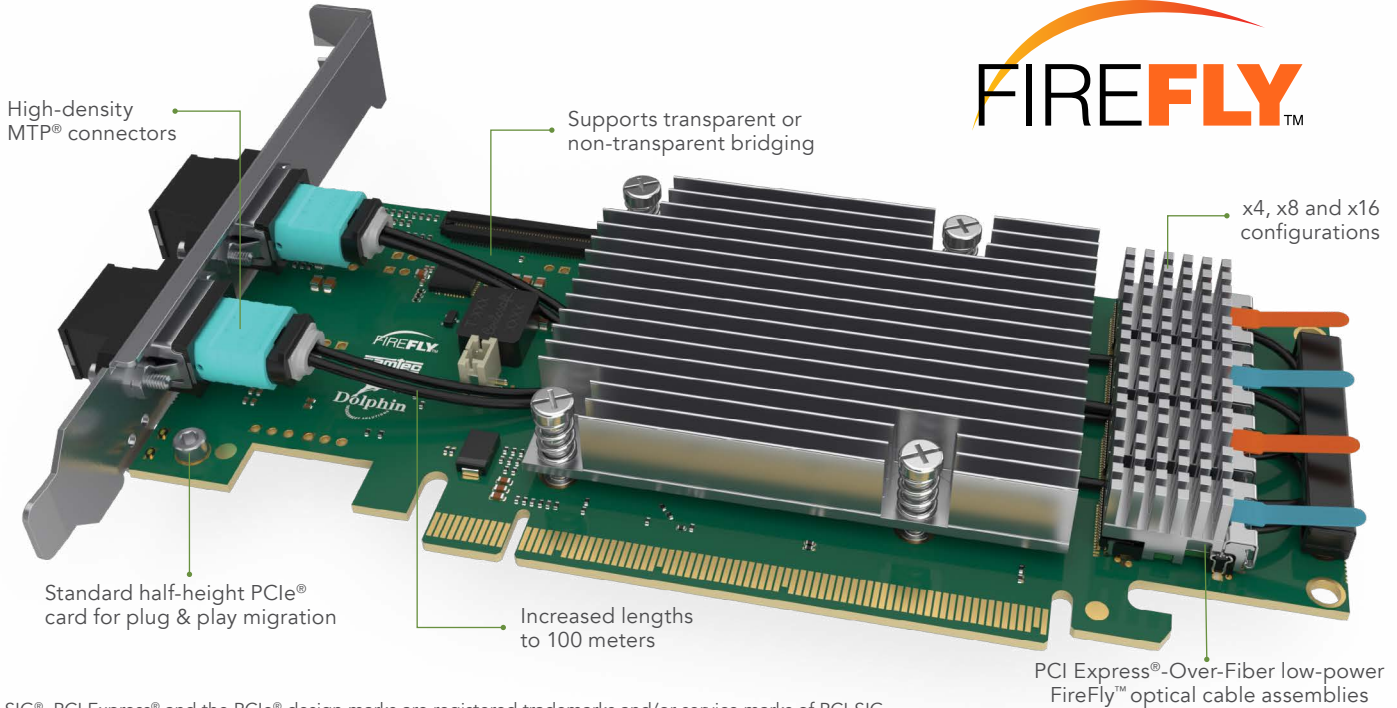

PCI-SIG®, PCI Express® and the PCIe® design marks are registered trademarks and/or service marks of PCI-SIG. MTP® is a registered trademark of US Conec Ltd.

### System

- PCOA Series - PCI Express®-Over-Fiber Adaptor Card
- Includes: PCUO Series - PCI Express®-Over-Fiber FireFly™ Optical Cable System

For more information on Samtec's PCI Express®-Over-Fiber FireFly™ Solutions, please visit [samtec.com/firefly](http://samtec.com/firefly) or contact [firefly@samtec.com](mailto:firefly@samtec.com).