

DO NOT SCALE FROM THIS PRINT

TABLE 1			
ITEM	COMPONENT	-HN	-GN
1	SUB-ASSEMBLY	SUB-BNC5-P-C-N-ST-CA1	SUB-BNC5-P-C-N-ST-CA1
2	PIN	BNC5-PIN-001-H	BNC5-PIN-001-G
3	OUTER FERRULE	BNC-FER-002-N	BNC-FER-002-N
4	INSULATOR	BNC5-INS-001	BNC5-INS-001
5	INNER FERRULE	BNC5-FER-001-N	BNC5-FER-001-N

BNC5-P-C-XX-ST-CA1-X

GENDER
-P: PLUG


TYPE
-C: CABLE

PACKAGING
-BLANK: INDIVIDUALLY BAGGED
-B: BULK PACKAGED (QTY=100 MAX)

TERMINATION
-CA1: CABLE (RG174 OR RG316)

ORIENTATION
-ST: STRAIGHT

PLATING SPECIFICATION
-HN: 30µ" GOLD CENTER CONTACT, 100µ" NICKEL OUTER CONTACT
-GN: 10µ" GOLD CENTER CONTACT, 100µ" NICKEL OUTER CONTACT (SEE TABLE 1)

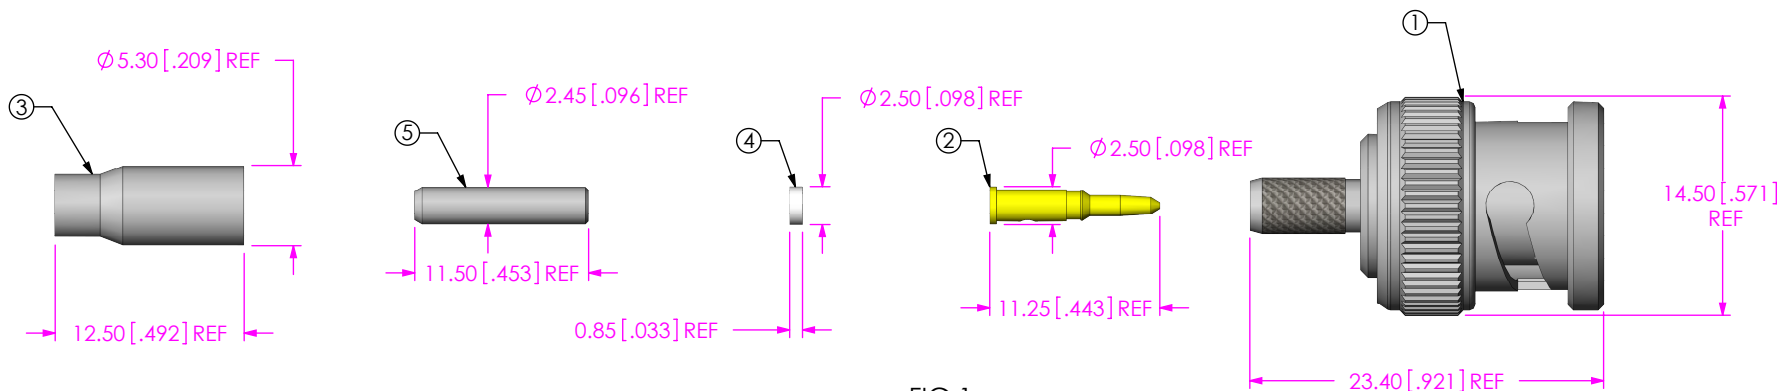

NOTES:

1. REPRESENTS A CRITICAL DIMENSION.
2. CENTER CONTACT PUSHOUT FORCE: 26.69 N [6 LB] MIN.
3. NOTE DELETED.
4. NOTE DELETED.
5. PRODUCT TO BE PACKAGED PER PRECISION RF SECTION OF PACKAGING MANUAL.
6. NOTE DELETED.
7. NOTE DELETED.
8. NOTE DELETED.

F:\DWG\MISC\MKTG\BNC5-P-C-XX-ST-CA1-X-MKT.slddrw

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. TOLERANCES ARE:

DECIMALS ANGLES
.X: ±0.3 [.01] 5°
.XX: ±0.13 [.005]
.XXX: ±0.051 [.0020]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2:1

SHELL, FERRULE: BRASS
CONTACT: BRASS
DIELECTRIC: PTFE




520 PARK EAST BLVD., NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322


DESCRIPTION:
BNC STRAIGHT CABLE PLUG, RG174 & RG316 - 50 OHM

DWG. NO.
BNC5-P-C-XX-ST-CA1-X


BY: R MUSSER 12/19/2007 SHEET 1 OF 3

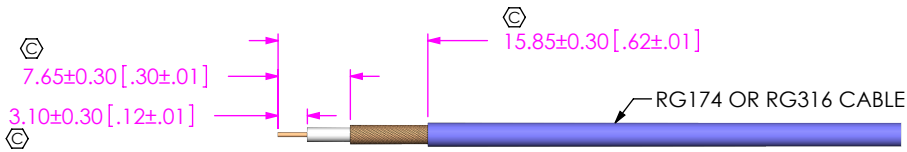


IN-PROCESS 1
STRIP AND TIN INNER CONDUCTOR

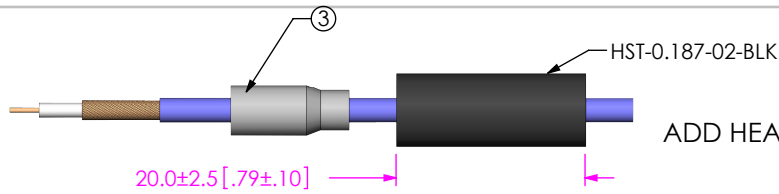


IN-PROCESS 2
ADD HEAT SHRINK TUBE AND FERRULE

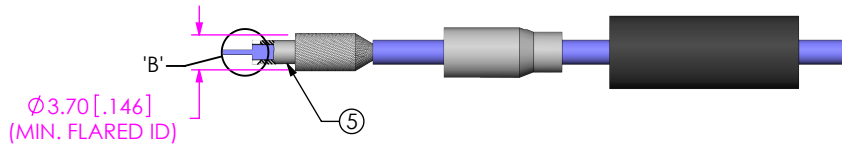


IN-PROCESS 3
FLARE SHIELD
ADD INNER FERRULE AND INSULATOR

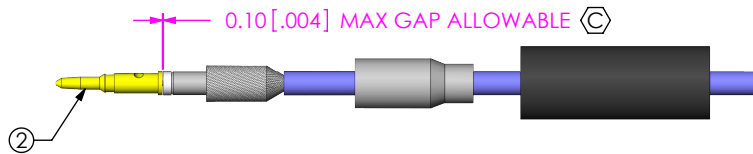


IN-PROCESS 4
SOLDER SIGNAL PIN

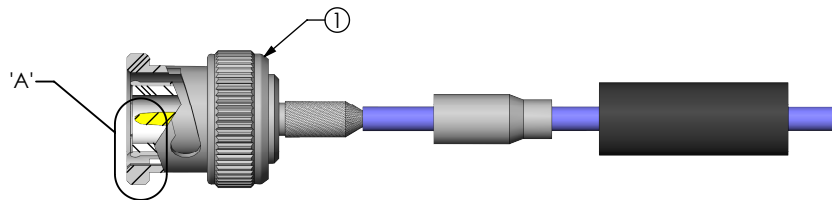



IN-PROCESS 5
ADD SUB ASSEMBLY

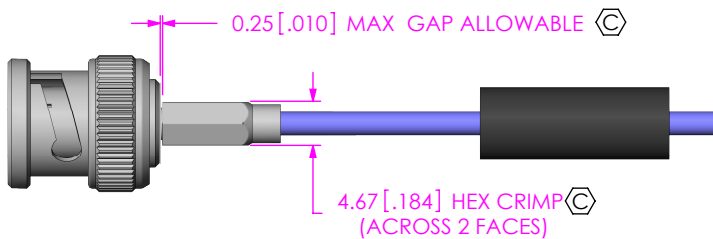

IN-PROCESS 6
CRIMP FERRULE
(USE RF CRIMP HAND TOOL
#CAT-HT-126667-21 OR EQUIVALENT)

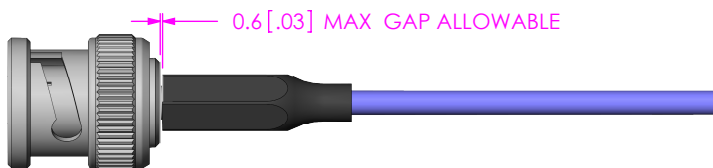

IN-PROCESS 7
APPLY HEAT SHRINK TUBE

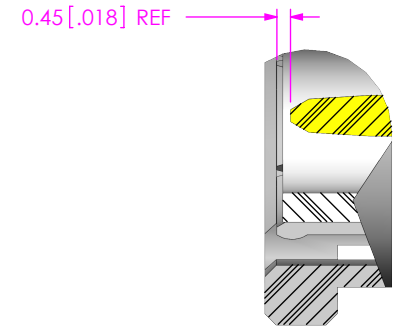

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:0.8

samtec
520 PARK EAST BLVD., NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:
BNC STRAIGHT CABLE PLUG, RG174 & RG316 - 50 OHM

DWG. NO.
BNC5-P-C-XX-ST-CA1-X

BY: R MUSSER 12/19/2007 SHEET 2 OF 3

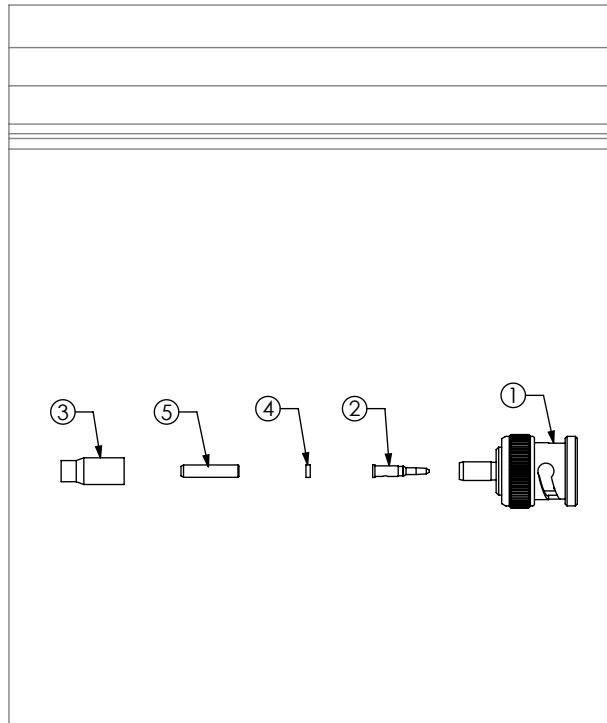


FIG 2
BNC5-P-C-XX-ST-CA1 SHOWN

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:0.8

samtec

520 PARK EAST BLVD., NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:
BNC STRAIGHT CABLE PLUG, RG174 & RG316 - 50 OHM

DWG. NO.
BNC5-P-C-XX-ST-CA1-X

BY: R MUSSER 12/19/2007 SHEET 3 OF 3