

FIG. 1
FOR -10, -20, -30 POS (THREADED)
OR -05 THRU -50 (NON-THREADED)

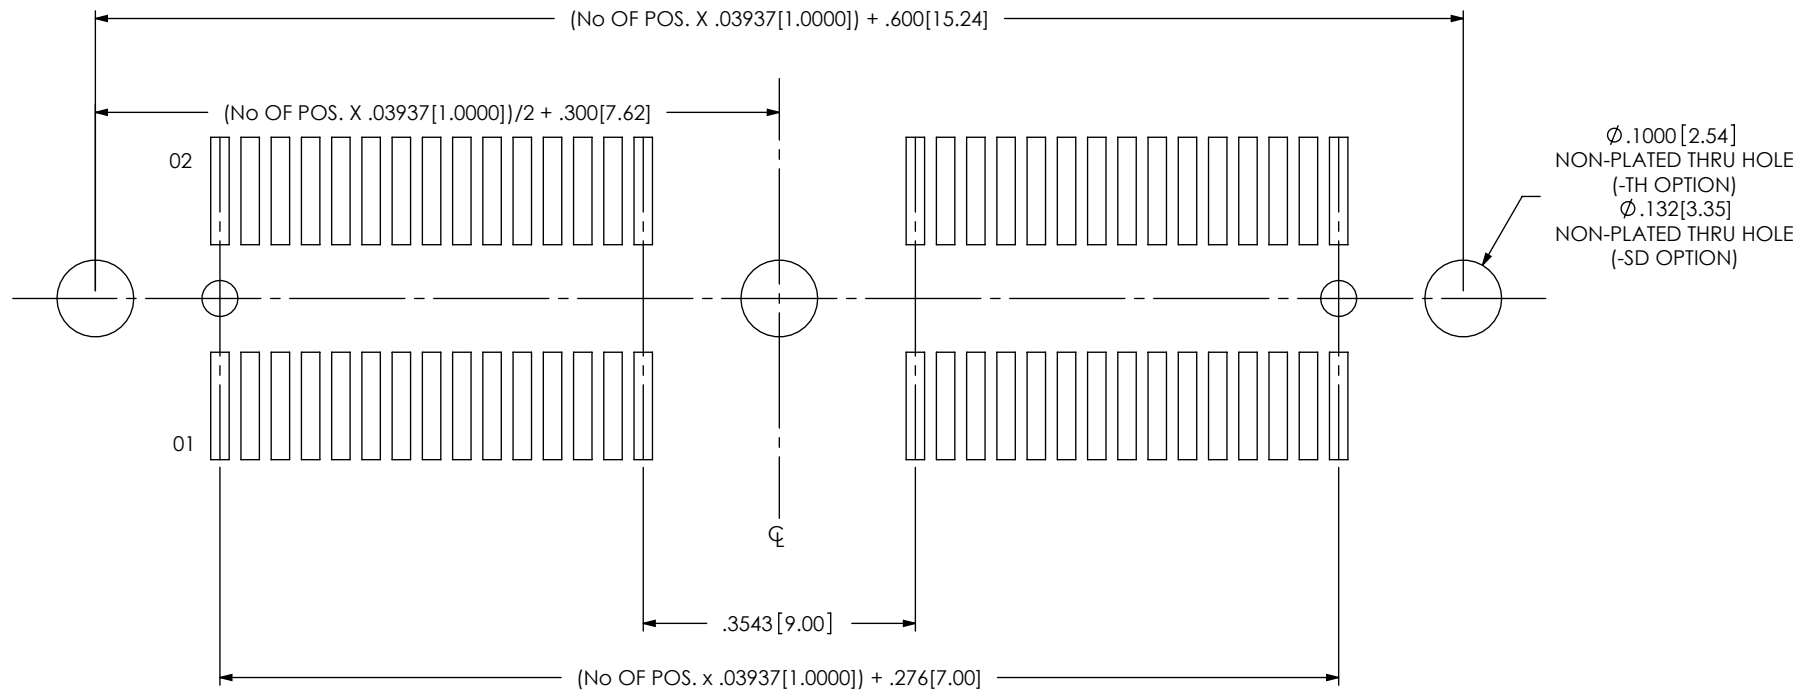


FIG. 2
FOR -40 AND -50 POS (THREADED)
ALL OTHER DIMENSION ARE THE SAME AS ABOVE

- NOTES:
1. PLATING TO BE .000030 INCHES GOLD WITH HARDNESS OF 120-200 KNOOP PER ASTM B 488 TYPE 2, GRADE C
 2. IT IS RECOMMENDED THAT A STIFFENER BE USED TO MAINTAIN FLATNESS OF BOARD.

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322