

RECOMMENDED PCB LAYOUT FOR DOUBLE ROW FW-XX-XX-XX-D-XX D

REV. D

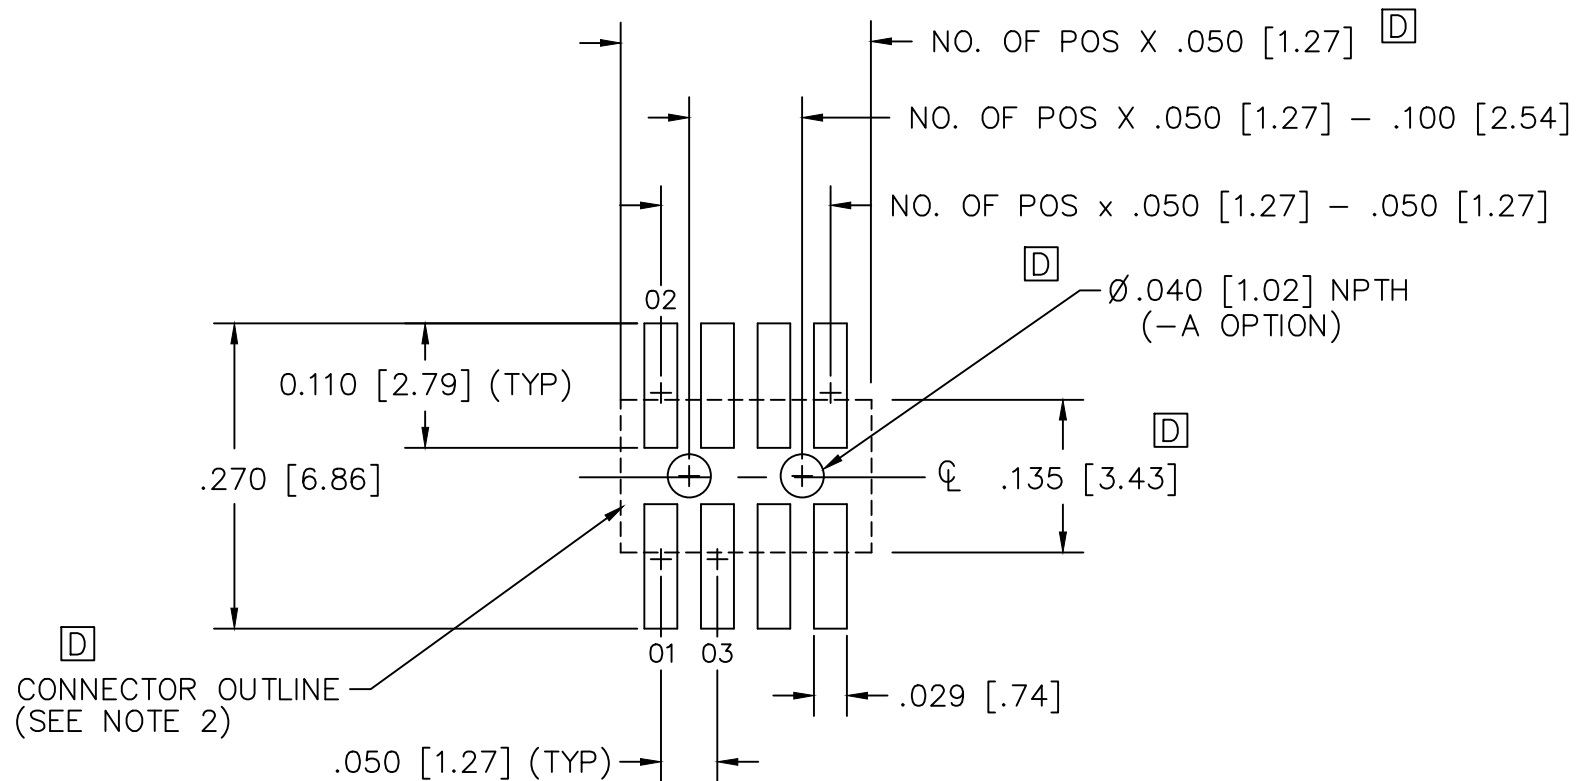


FIG 1

FW-04-XX-XX-D-SM

NOTES: D

1. ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINES.
2. OTHER COMPONENTS PLACED ON PCB SHALL AVOID THIS ZONE.
3. FOR ADDED MECHANICAL STABILITY, SAMTEC RECOMMENDS MECHANICAL BOARD SPACERS BE USED IN APPLICATIONS WITH GOLD OR SELECTIVE GOLD PLATED CONNECTORS. CONTACT IPG@SAMTEC.COM FOR MORE INFORMATION.

samtec

MISC\MKTG\FOOTPRINT
FW-D-SM

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147