

FIG 1
SEMX MATED WITH TEMX

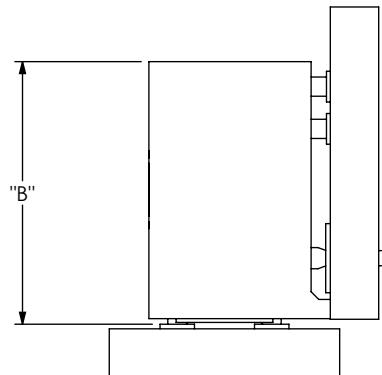


FIG 2
SEMX MATED WITH TEMX-DH1

NOTES:

1. ALL DIMENSIONS BASED ON NOMINAL VALUES FOR SAMTEC RECOMMENDED PCB LAYOUTS.
2. ALTHOUGH MAX DIMENSION ARE LISTED SAMTEC RECOMMENDS FULLY MATING COMPONENTS.

		SEM		WIPE	
		"A" FULLY MATED	"A" MAX	FULLY MATED	MIN @ "A" MAX
TEM	-03.0	5.76 [.227]	6.15 [.242]	0.77 [.030]	0.38 [.015]
	-04.0	6.76 [.266]	7.15 [.281]		
	-07.0	9.76 [.384]	10.15 [.400]		

		SEM		WIPE	
		"B" FULLY MATED	"B" MAX	FULLY MATED	MIN @ "B" MAX
TEM	-DH1	8.68 [.342]	9.08 [.357]	0.78 [.031]	0.38 [.015]

* PROPRIETARY NOTE *
THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR
REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTEC, INC.

Samtec
520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322