

**Instruction Sheet** 


Mini Mate <sup>®</sup> Connector Series: MMTS, MMTD, MMTST, MMTDT,

SMSS and SMSD Series

CAT-EX-74-01 - Extraction Tool

STS-N-005 Rev. A

Date: 5/16/2014

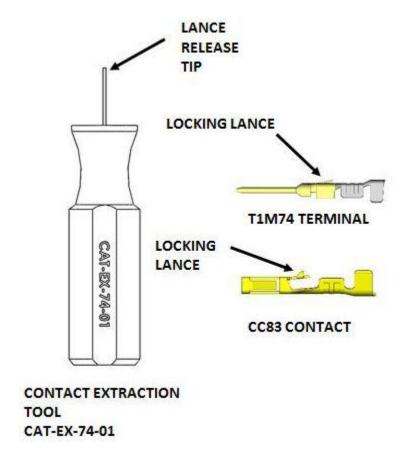

## FIGURE 1

#### 1. INTRODUCTION

Terminals and Contacts can be safely removed from a housing cavity by using the extraction tool shown in **Figure 1**. This instruction sheet covers the use of the SAMTEC Extraction Tool CAT-EX-74-01. These tools are intended to aid in the removal of the T1M74 and CC83, Mini Mate  $^{\otimes}$  terminals and contacts from the housings.

#### 2. CUSTOMER SERVICE

Further tooling and product application assistance is available by contacting the **Samtec Application Service Line - (+1-800-726-8329 (+1-812-944-6733))** 8:00 AM to 5:00 PM eastern time. To expedite your inquiry, have the pertinent part numbers for the product and tooling.

## 3. DESCRIPTION

Each tool handle is marked with the tooling number. Make sure it matches the tooling number specified in this document.

The T1M74 Mini Mate® terminal has a retaining lance that can be released through an access window located inside the housing as shown in **Figure 2**. The Extraction Tool has a tip that is inserted into the window to depress the lance the correct amount for contact removal.



## **Instruction Sheet**

Mini Mate <sup>®</sup> Connector Series: MMTS, MMTD, MMTST, MMTDT,

SMSS and SMSD Series

CAT-EX-74-01 - Extraction Tool

STS-N-005 Rev. A

Date: 5/16/2014

The CC83 Mini Mate<sup>®</sup> contact has a retaining lance that can be released through an access window located on the outside of the housing as shown in **Figure 3**. The Extraction tool has a tip that is inserted into the window to depress the lance the correct amount for contact removal.

**CAUTION -** Do not use any unintended tools to release the lance. This can cause damage to the lance and weaken its ability to retain the reinserted contact in the housing.

#### 4. EXTRACTION PROCEDURE

The following steps are recommended:

- 1. Push the desired lead forward to the bottom of its cavity. This will provide clearance for the lance to be depressed.
- 2. Engage the tip of the Extraction Tool in the lance window as shown in **Figure 2** and **Figure 3**. With downward pressure, push the tool toward the back of the window to release the lance.
- 3. Maintain downward pressure on the tool tip then grip the lead and pull the contact from its cavity.

# INSERT TOOL TIP BETWEEN TERMINAL AND HOUSING HERE

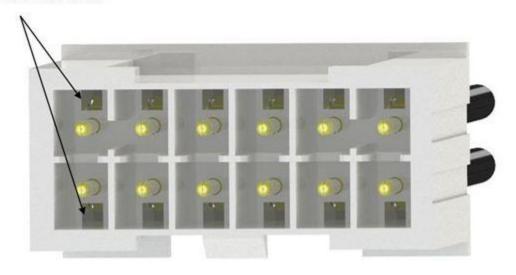


FIGURE 2



**Instruction Sheet** 

Mini Mate <sup>®</sup> Connector Series: MMTS, MMTD, MMTST, MMTDT,

**SMSS and SMSD Series** 

CAT-EX-74-01 - Extraction Tool

STS-N-005 Rev. A Date: 5/16/2014

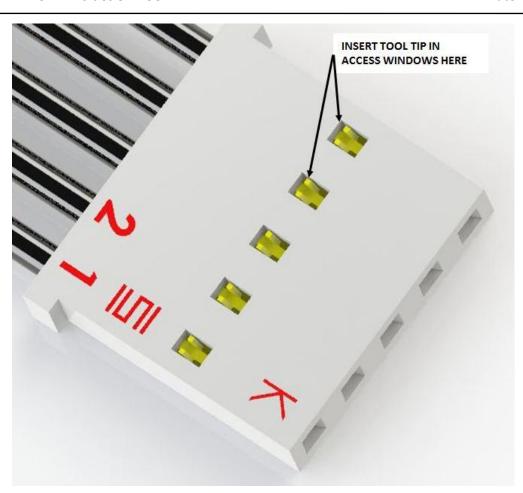


FIGURE 3