




Project Number: Extended Life Test Report	Tracking Code: 2123966_Report_Rev_1
Requested by: Chad Humphres	Date: 9/29/2020
Part #: ARF6-16-S-D-A-K-TR/ARC6-16-XX-X-LU-LU-3-1	
Part description: ARF6/ARC6	Tech: Keney Chen
Test Start: 7/3/2019	Test Completed: 8/9/2019

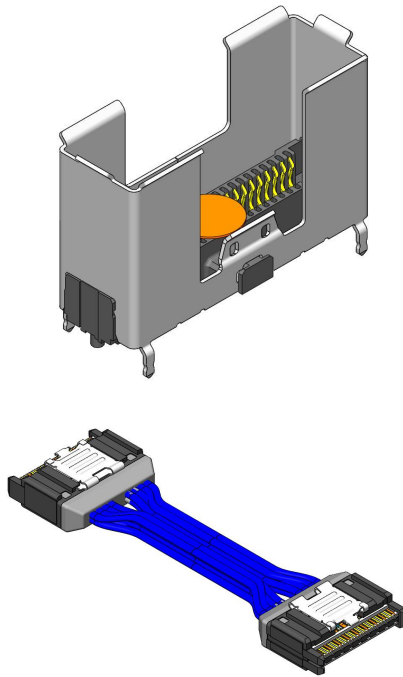

**EXTENDED LIFE TEST REPORT**  
**ARF6/ARC6**  
**ARF6-16-S-D-A-K-TR/ARC6-16-XX-X-LU-LU-3-1**

Tracking Code: 2123966_Report_Rev_1	Part #: ARF6-16-S-D-A-K-TR/ARC6-16-XX-X-LU-LU-3-1
Part description: ARF6/ARC6	

**REVISION HISTORY**

<b>DATA</b>	<b>REV.NUM.</b>	<b>DESCRIPTION</b>	<b>ENG</b>
4/2/2020	1	Initial Issue	KH

## CERTIFICATION

All instruments and measuring equipment were calibrated to National Institute for Standards and Technology (NIST) traceable standards according to ISO 10012-1 and ANSI/NCSL 2540-1, as applicable.

All contents contained herein are the property of Samtec. No portion of this report, in part or in full shall be reproduced without prior written approval of Samtec.

### SCOPE

To perform the following tests: Extended Life test. Please see test plan.

### APPLICABLE DOCUMENTS

Standards: EIA Publication 364

### TEST SAMPLES AND PREPARATION

- 1) All materials were manufactured in accordance with the applicable product specification.
- 2) All test samples were identified and encoded to maintain traceability throughout the test sequences.
- 3) After soldering, the parts to be used for LLCR testing were cleaned according to CO-SC-WI-3029.
- 4) Either an automated cleaning procedure or an ultrasonic cleaning procedure may be used.
- 5) The automated procedure is used with aqueous compatible soldering materials.
- 6) Parts not intended for testing LLCR are visually inspected and cleaned if necessary.
- 7) Any additional preparation will be noted in the individual test sequences.
- 8) Solder Information: Lead Free
- 9) Samtec Test PCBs used: PCB-110078-TST-XX

## FLOWCHARTS

### Extended Life

Group 1 ARF6-16-S-D-A-K-TR ARC6-16-XX-X-LU-LU-3-1 8 Assemblies 100 Cycles		Group 2 ARF6-16-S-D-A-K-TR ARC6-16-XX-X-LU-LU-3-1 8 Assemblies 250 Cycles		Group 3 ARF6-16-S-D-A-K-TR ARC6-16-XX-X-LU-LU-3-1 8 Assemblies 500 Cycles		Group 4 ARF6-16-S-D-A-K-TR ARC6-16-XX-X-LU-LU-3-1 8 Assemblies 1000 Cycles		Group 5 ARF6-16-S-D-A-K-TR ARC6-16-XX-X-LU-LU-3-1 8 Assemblies 2500 Cycles	
Step	Description	Step	Description	Step	Description	Step	Description	Step	Description
1.	Plating Thickness Verification (4)	1.	Plating Thickness Verification (4)	1.	Plating Thickness Verification (4)	1.	Plating Thickness Verification (4)	1.	Plating Thickness Verification (4)
2.	LLCR (2)	2.	LLCR (2)	2.	LLCR (2)	2.	LLCR (2)	2.	LLCR (2)
3.	Cycles Quantity = 100 Cycles	3.	Cycles Quantity = 250 Cycles	3.	Cycles Quantity = 500 Cycles	3.	Cycles Quantity = 1000 Cycles	3.	Cycles Quantity = 2500 Cycles
4.	LLCR (2) Max Delta = 15 mOhm	4.	LLCR (2) Max Delta = 15 mOhm	4.	LLCR (2) Max Delta = 15 mOhm	4.	LLCR (2) Max Delta = 15 mOhm	4.	LLCR (2) Max Delta = 15 mOhm
5.	Thermal Shock (5)	5.	Thermal Shock (5)	5.	Thermal Shock (5)	5.	Thermal Shock (5)	5.	Thermal Shock (5)
6.	LLCR (2) Max Delta = 15 mOhm	6.	LLCR (2) Max Delta = 15 mOhm	6.	LLCR (2) Max Delta = 15 mOhm	6.	LLCR (2) Max Delta = 15 mOhm	6.	LLCR (2) Max Delta = 15 mOhm
7.	Humidity (1)	7.	Humidity (1)	7.	Humidity (1)	7.	Humidity (1)	7.	Humidity (1)
8.	LLCR (2) Max Delta = 15 mOhm	8.	LLCR (2) Max Delta = 15 mOhm	8.	LLCR (2) Max Delta = 15 mOhm	8.	LLCR (2) Max Delta = 15 mOhm	8.	LLCR (2) Max Delta = 15 mOhm
9.	Photos (3)	9.	Photos (3)	9.	Photos (3)	9.	Photos (3)	9.	Photos (3)

(1) Humidity = EIA-364-31

Test Condition = B (240 Hours)

Test Method = III (+25°C to +65°C @ 90% RH to 98% RH)

Test Exceptions: ambient pre-condition and delete steps 7a and 7b

(2) LLCR = EIA-364-23

Open Circuit Voltage = 20 mV Max

Test Current = 100 mA Max

(3) Photos

Attach 2-3 photos of contact area

(4) Plating Thickness Verification

Measure, verify, and document plating thickness on both male and female (one group only)

Plating thickness to be measured on loose pins used during assembly

(5) Thermal Shock = EIA-364-32

Exposure Time at Temperature Extremes = 1/2 Hour

Method A, Test Condition = I (-55°C to +85°C)

Test Duration = A-3 (100 Cycles)

## ATTRIBUTE DEFINITIONS

The following is a brief, simplified description of attributes.

### THERMAL SHOCK:

- 1) EIA-364-32, *Thermal Shock (Temperature Cycling) Test Procedure for Electrical Connectors*.
- 2) Test Condition: -55°C to +85°C
- 3) Test Time: ½ hour dwell at each temperature extreme
- 4) Number of Cycles: 100
- 5) All test samples are pre-conditioned at ambient.
- 6) All test samples are exposed to environmental stressing in the mated condition.

### HUMIDITY:

- 1) Reference document: EIA-364-31, *Humidity Test Procedure for Electrical Connectors*.
- 2) Test Condition B, 240 Hours.
- 3) Method III, +25° C to + 65° C, 90% to 98% Relative Humidity excluding sub-cycles 7a and 7b.
- 4) All samples are pre-conditioned at ambient.
- 5) All test samples are exposed to environmental stressing in the mated condition.

### MATING/UNMATING:

- 1) Reference document: EIA-364-13, *Mating and Unmating Forces Test Procedure for Electrical Connectors*.
- 2) The full insertion position was to within 0.003” to 0.004” of the plug bottoming out in the receptacle to prevent damage to the system under test.
- 3) One of the mating parts is secured to a floating X-Y table to prevent damage during cycling.

### LLCR:

- 1) EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 2) A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 3) The following guidelines are used to categorize the changes in LLCR as a result from stressing
  - a.  $\leq +5.0$  mOhms: -----Stable
  - b. +5.1 to +10.0 mOhms:-----Minor
  - c. +10.1 to +15.0 mOhms: -----Acceptable
  - d. +15.1 to +50.0 mOhms: -----Marginal
  - e. +50.1 to +1000 mOhms: -----Unstable
  - f.  $>+1000$  mOhms:-----Open Failure

**RESULTS****LLCR Durability (160 signal and 32 ground LLCR test points)****Group 1 100 cycles****Signal pin**

- **Initial** ----- 171.28 mOhms Max
- **Durability, 100 Cycles**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 159 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 1 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**Ground pin**

- **Initial** ----- 37.42 mOhms Max
- **Durability, 100 Cycles**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**RESULTS Continued****Group 2 250 cycles****Signal pin**

- **Initial** ----- 171.06 mOhms Max
- **Durability, 250 Cycles**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 158 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 2 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 158 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 2 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**Ground pin**

- **Initial** ----- 37.44 mOhms Max
- **Durability, 250 Cycles**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**RESULTS Continued****Group 3 500 cycles****Signal pin**

- **Initial** ----- 172.15 mOhms Max
- **Durability, 500 Cycles**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 158 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 2 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**Ground pin**

- **Initial** ----- 39.35 mOhms Max
- **Durability, 500 Cycles**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 31 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 1 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**RESULTS Continued****Group 4 1000 cycles****Signal pin**

- **Initial** ----- 173.34 mOhms Max
- **Durability, 1000 Cycles**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**Ground pin**

- **Initial** ----- 38.94 mOhms Max
- **Durability, 1000 Cycles**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**RESULTS Continued****Group 5 2500 cycles****Signal pin**

- **Initial** ----- 171.70 mOhms Max
- **Durability, 2500 Cycles**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 158 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 2 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 160 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**Ground pin**

- **Initial** ----- 37.95 mOhms Max
- **Durability, 2500 Cycles**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Thermal**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 32 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +1000 mOhms ----- 0 Points ----- Unstable
  - >+1000 mOhms ----- 0 Points ----- Open Failure

**DATA SUMMARIES**

**LLCR Durability:**

- 1) A total of 192 points were measured.
- 2) EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3) A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4) The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms: -----Stable
  - b.  $+5.1$  to  $+10.0$  mOhms: -----Minor
  - c.  $+10.1$  to  $+15.0$  mOhms: -----Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms: -----Marginal
  - e.  $+50.1$  to  $+1000$  mOhms: -----Unstable
  - f.  $>+1000$  mOhms: -----Open Failure

**Group 1 100 cycles**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	10/9/2019	10/10/2019	10/18/2019	10/31/2019
Room Temp (Deg C)	23	23	23	23
Rel Humidity (%)	51	51	52	52
Technician	Keney Chen	Keney Chen	Keney Chen	Keney Chen
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 100 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	168.75	0.79	0.84	0.95
St. Dev.	0.85	0.57	0.67	0.82
Min	167.19	0.01	0.00	0.02
Max	171.28	2.78	2.89	6.53
Summary Count	160	160	160	160
Total Count	160	160	160	160
<b>Pin Type 2: Ground</b>				
Average	35.42	0.70	0.83	1.18
St. Dev.	0.91	0.49	0.75	0.84
Min	33.62	0.01	0.04	0.01
Max	37.42	1.93	4.02	3.34
Summary Count	32	32	32	32
Total Count	32	32	32	32

<b>LLCR Delta Count by Category</b>						
	Stable	Minor	Acceptable	Marginal	Unstable	Open
mOhms	$\leq 5$	$>5$ & $\leq 10$	$>10$ & $\leq 15$	$>15$ & $\leq 50$	$>50$ & $\leq 1000$	$>1000$
<b>100 Cycles</b>	192	0	0	0	0	0
<b>Therm Shck</b>	192	0	0	0	0	0
<b>Humidity</b>	191	1	0	0	0	0

**DATA SUMMARIES Continued****Group 2 250 cycles**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	10/9/2019	10/10/2019	10/18/2019	10/31/2019
Room Temp (Deg C)	23	23	23	23
Rel Humidity (%)	50	51	50	52
Technician	Keney Chen	Keney Chen	Keney Chen	Keney Chen
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 250 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	168.82	0.52	1.06	1.10
St. Dev.	0.94	0.44	1.07	1.11
Min	166.41	0.00	0.01	0.00
Max	171.06	2.53	6.79	6.66
Summary Count	160	160	160	160
Total Count	160	160	160	160
<b>Pin Type 2: Ground</b>				
Average	35.58	0.40	0.79	0.99
St. Dev.	0.86	0.26	0.61	0.76
Min	33.77	0.05	0.08	0.08
Max	37.44	0.93	3.16	3.71
Summary Count	32	32	32	32
Total Count	32	32	32	32

<b>LLCR Delta Count by Category</b>						
	Stable	Minor	Acceptable	Marginal	Unstable	Open
mOhms	<=5	>5 & <=10	>10 & <=15	>15 & <=50	>50 & <=1000	>1000
<b>250 Cycles</b>	<b>192</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
<b>Therm Shck</b>	<b>190</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
<b>Humidity</b>	<b>190</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

**DATA SUMMARIES Continued****Group 3 500 cycles**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	10/9/2019	10/10/2019	10/18/2019	10/31/2019
Room Temp (Deg C)	23	23	23	23
Rel Humidity (%)	51	50	50	52
Technician	Keney Chen	Keney Chen	Keney Chen	Keney Chen
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 500 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	169.09	0.58	0.63	1.01
St. Dev.	1.00	0.55	0.57	1.11
Min	167.18	0.00	0.00	0.00
Max	172.15	2.79	2.84	8.38
Summary Count	160	160	160	160
Total Count	160	160	160	160
<b>Pin Type 2: Ground</b>				
Average	35.73	0.90	0.67	0.87
St. Dev.	1.11	0.77	0.42	0.95
Min	33.83	0.01	0.03	0.02
Max	39.35	4.08	1.74	5.08
Summary Count	32	32	32	32
Total Count	32	32	32	32

<b>LLCR Delta Count by Category</b>						
	Stable	Minor	Acceptable	Marginal	Unstable	Open
mOhms	<=5	>5 & <=10	>10 & <=15	>15 & <=50	>50 & <=1000	>1000
<b>500 Cycles</b>	192	0	0	0	0	0
<b>Therm Shck</b>	192	0	0	0	0	0
<b>Humidity</b>	189	3	0	0	0	0

**DATA SUMMARIES Continued****Group 4 1000 cycles**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	10/10/2019	10/16/2019	10/31/2019	11/7/2019
Room Temp (Deg C)	23	23	23	23
Rel Humidity (%)	50	51	51	51
Technician	Keney Chen	Keney Chen	Keney Chen	Keney Chen
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 1000 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	168.81	0.52	1.00	1.58
St. Dev.	1.16	0.45	0.74	0.65
Min	166.13	0.00	0.02	0.01
Max	173.34	2.12	4.49	3.73
Summary Count	160	160	160	160
Total Count	160	160	160	160
<b>Pin Type 2: Ground</b>				
Average	35.79	0.59	1.54	1.06
St. Dev.	1.42	0.42	0.75	0.82
Min	33.67	0.00	0.02	0.05
Max	38.94	1.65	2.91	2.63
Summary Count	32	32	32	32
Total Count	32	32	32	32

<b>LLCR Delta Count by Category</b>						
	Stable	Minor	Acceptable	Marginal	Unstable	Open
mOhms	<=5	>5 & <=10	>10 & <=15	>15 & <=50	>50 & <=1000	>1000
<b>1000 Cycles</b>	<b>192</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
<b>Therm Shck</b>	<b>192</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>
<b>Humidity</b>	<b>192</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

**DATA SUMMARIES Continued****Group 5 2500 cycles**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	10/10/2019	10/22/2019	10/31/2019	11/7/2019
Room Temp (Deg C)	23	23	23	23
Rel Humidity (%)	51	51	51	51
Technician	Keney Chen	Keney Chen	Keney Chen	Keney Chen
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 2500 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	168.80	0.64	1.12	0.57
St. Dev.	1.01	0.50	0.93	0.53
Min	166.07	0.02	0.01	0.01
Max	171.70	2.15	5.45	3.95
Summary Count	160	160	160	160
Total Count	160	160	160	160
<b>Pin Type 2: Ground</b>				
Average	35.81	0.55	1.04	0.61
St. Dev.	1.07	0.41	0.88	0.47
Min	33.98	0.01	0.01	0.04
Max	37.95	1.58	3.02	2.09
Summary Count	32	32	32	32
Total Count	32	32	32	32

<b>LLCR Delta Count by Category</b>						
	Stable	Minor	Acceptable	Marginal	Unstable	Open
mOhms	<=5	>5 & <=10	>10 & <=15	>15 & <=50	>50 & <=1000	>1000
<b>2500 Cycles</b>	192	0	0	0	0	0
<b>Therm Shck</b>	190	2	0	0	0	0
<b>Humidity</b>	192	0	0	0	0	0

**EQUIPMENT AND CALIBRATION SCHEDULES****Equipment #:** HZ-TCT-01**Description:** Normal force analyzer**Manufacturer:** Mecmesin Multitester**Model:** Mecmesin Multitester 2.5-i**Serial #:** 08-1049-04**Accuracy:** Last Cal: 3/7/2019, Next Cal: 3/6/2020**Equipment #:** HZ-MO-05**Description:** Micro-ohmmeter**Manufacturer:** Keithley**Model:** 3706**Serial #:** 1285188**Accuracy:** Last Cal: 9/25/2019, Next Cal: 9/24/2020