



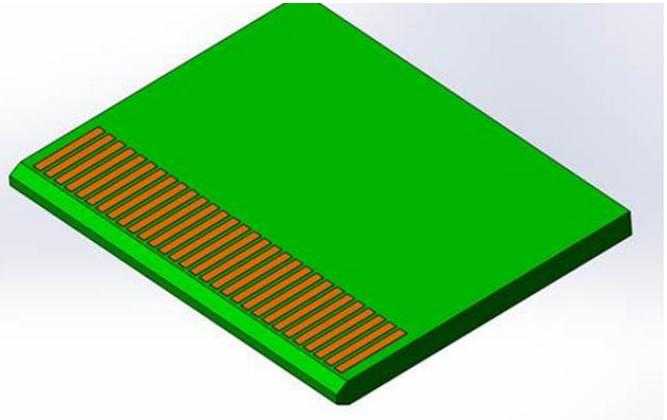

Project Number: Design Qualification Test Report	Tracking Code: 293628_Report_Rev_1
Requested by: Catie Eichhorn	Date: 10/13/2014
Part #: MB1-130-01-L-S-02-SL/EDGE CARD	
Part description: MB1/CARD	Tech: Kason He
Test Start: 03/12/2014	Test Completed: 05/28/2014

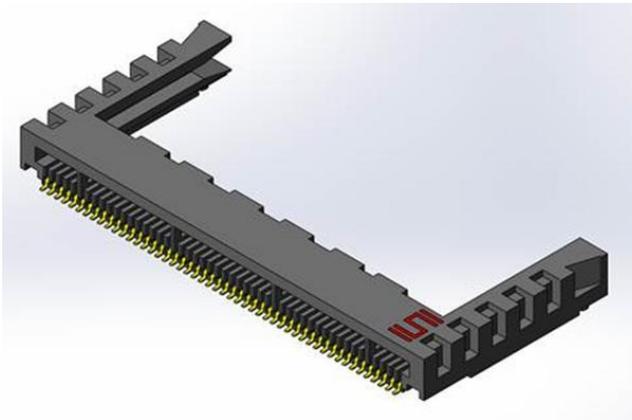

**DESIGN QUALIFICATION TEST REPORT**

**MB1/CARD  
MB1-130-01-L-S-02-SL/EDGE CARD**

**REVISION HISTORY**

<b>DATA</b>	<b>REV.NUM.</b>	<b>DESCRIPTION</b>	<b>ENG</b>
<b>10/13/2014</b>	<b>1</b>	<b>Initial Issue</b>	<b>KH</b>

## CERTIFICATION

All instruments and measuring equipment were calibrated to National Institute for Standards and Technology (NIST) traceable standards according to ISO 10012-1 and ANSI/NCSL 2540-1, as applicable.

All contents contained herein are the property of Samtec. No portion of this report, in part or in full shall be reproduced without prior written approval of Samtec.

### SCOPE


To perform the following tests: Design Qualification test. Please see test plan.

### APPLICABLE DOCUMENTS

Standards: EIA Publication 364

### TEST SAMPLES AND PREPARATION

- 1) All materials were manufactured in accordance with the applicable product specification.
- 2) All test samples were identified and encoded to maintain traceability throughout the test sequences.
- 3) After soldering, the parts to be used for LLCR testing were cleaned according to TLWI-0001.
- 4) Either an automated cleaning procedure or an ultrasonic cleaning procedure may be used.
- 5) The automated procedure is used with aqueous compatible soldering materials.
- 6) Parts not intended for testing LLCR are visually inspected and cleaned if necessary.
- 7) Any additional preparation will be noted in the individual test sequences.
- 8) Solder Information: Lead Free
- 9) Re-Flow Time/Temp: See accompanying profile.
- 10) Samtec Test PCBs used: PCB-106080-TST/PCB-106081-TST/PCB-106082-TST

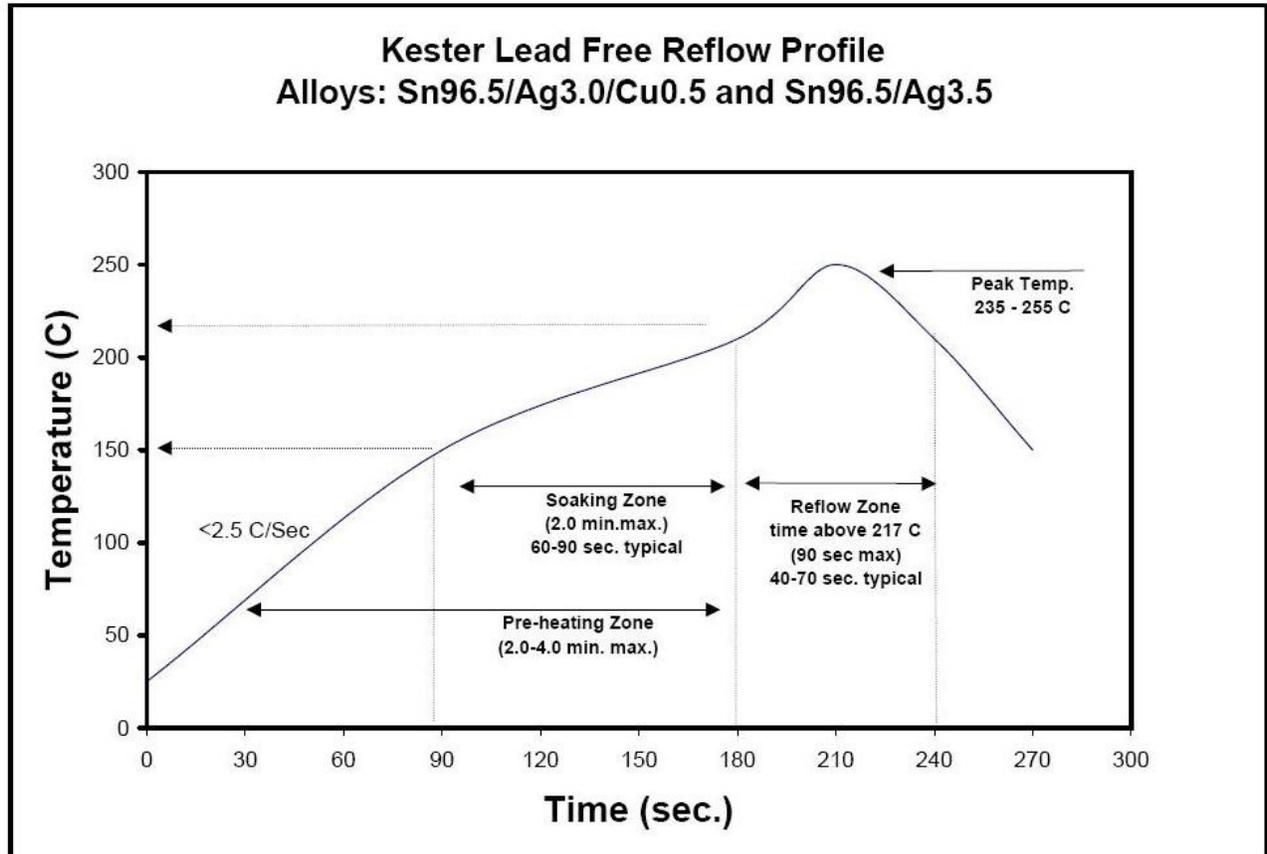**TYPICAL OVEN PROFILE (Soldering Parts to Test Boards)**

**FLOWCHARTS****Gas Tight**Group 1

MB1-130-01-L-S-02-SL  
 0.056" EDGE CARD  
 8 Assemblies  
 Lower Board Thickness

**Step Description**

1. LLCR (2)  
Max Delta = 15 mOhm
2. Gas Tight (1)
3. LLCR (2)  
Max Delta = 15 mOhm

(1) Gas Tight = EIA-364-36

(2) LLCR = EIA-364-23  
 Open Circuit Voltage = 20 mV Max  
 Test Current = 100 mA Max

**Normal Force**Group 1

MB1-130-01-L-S-02-SL

8 Contacts Minimum  
 Signal Without Thermals

**Step Description**

1. Contact Gaps
2. Normal Force (1)  
Deflection = 0.025 "  
Expected Force at Max Deflection = 70 g

**Upper Board Thickness**Group 2

MB1-130-01-L-S-02-SL

0.068" EDGE CARD  
 8 Contacts Minimum  
 Signal With Thermals

**Step Description**

1. Contact Gaps
2. Thermal Age (2)
3. Contact Gaps
4. Normal Force (1)  
Deflection = 0.025 "  
Expected Force at Max Deflection = 70 g

(1) Normal Force = EIA-364-04

(2) Thermal Age = EIA-364-17  
 Test Condition = 4 (105°C)  
 Time Condition = B (250 Hours)

**FLOWCHARTS Continued****Thermal Aging****Group 1**

MB1-130-01-L-S-02-SL  
 0.056" EDGE CARD  
 8 Assemblies  
 Lower Board Thickness

Step	Description
1.	Contact Gaps
2.	Mating/Unmating Force (2)
3.	LLCR (1) Max Delta = 15 mOhm
4.	Thermal Age (3)
5.	LLCR (1) Max Delta = 15 mOhm
6.	Mating/Unmating Force (2)
7.	Contact Gaps

**Group 2**

MB1-130-01-L-S-02-SL  
 0.068" EDGE CARD  
 8 Assemblies  
 Upper Board Thickness

Step	Description
1.	Contact Gaps
2.	Mating/Unmating Force (2)
3.	LLCR (1) Max Delta = 15 mOhm
4.	Thermal Age (3)
5.	LLCR (1) Max Delta = 15 mOhm
6.	Mating/Unmating Force (2)
7.	Contact Gaps

(1) LLCR = EIA-364-23

Open Circuit Voltage = 20 mV Max  
 Test Current = 100 mA Max

(2) Mating/Unmating Force = EIA-364-13

(3) Thermal Age = EIA-364-17

Test Condition = 4 (105°C)  
 Time Condition = B (250 Hours)

## FLOWCHARTS Continued

### Mating/Unmating/Durability

Group 1	Group 2	Group 3	Group 4
MB1-130-01-L-S-02-SL 0.056" EDGE CARD 8 Assemblies Lower Board Thickness	MB1-120-01-L-S-02-SL 0.068" EDGE CARD 8 Assemblies Upper Board Thickness	MB1-150-01-L-S-02-SL 0.068" EDGE CARD 8 Assemblies Upper Board Thickness	MB1-130-01-L-S-02-SL 0.068" EDGE CARD 8 Assemblies Upper Board Thickness
Step	Step	Step	Step
Description	Description	Description	Description
1. Contact Gaps	1. Contact Gaps	1. Contact Gaps	1. Contact Gaps
2. LLCR (2) Max Delta = 15 mOhm	2. Mating/Unmating Force (3)	2. Mating/Unmating Force (3)	2. LLCR (2) Max Delta = 15 mOhm
3. Mating/Unmating Force (3)	3. Cycles Quantity = 25 Cycles	3. Cycles Quantity = 25 Cycles	3. Mating/Unmating Force (3)
4. Cycles Quantity = 25 Cycles	4. Mating/Unmating Force (3)	4. Mating/Unmating Force (3)	4. Cycles Quantity = 25 Cycles
5. Mating/Unmating Force (3)	5. Cycles Quantity = 25 Cycles	5. Cycles Quantity = 25 Cycles	5. Mating/Unmating Force (3)
6. Cycles Quantity = 25 Cycles	6. Mating/Unmating Force (3)	6. Mating/Unmating Force (3)	6. Cycles Quantity = 25 Cycles
7. Mating/Unmating Force (3)	7. Cycles Quantity = 25 Cycles	7. Cycles Quantity = 25 Cycles	7. Mating/Unmating Force (3)
8. Cycles Quantity = 25 Cycles	8. Mating/Unmating Force (3)	8. Mating/Unmating Force (3)	8. Cycles Quantity = 25 Cycles
9. Mating/Unmating Force (3)	9. Cycles Quantity = 25 Cycles	9. Cycles Quantity = 25 Cycles	9. Mating/Unmating Force (3)
10. Cycles Quantity = 25 Cycles	10. Mating/Unmating Force (3)	10. Mating/Unmating Force (3)	10. Cycles Quantity = 25 Cycles
11. Mating/Unmating Force (3)			11. Mating/Unmating Force (3)
12. Contact Gaps			12. Contact Gaps
13. LLCR (2) Max Delta = 15 mOhm			13. LLCR (2) Max Delta = 15 mOhm
14. Thermal Shock (4)			14. Thermal Shock (4)
15. LLCR (2) Max Delta = 15 mOhm			15. LLCR (2) Max Delta = 15 mOhm
16. Humidity (1)			16. Humidity (1)
17. LLCR (2) Max Delta = 15 mOhm			17. LLCR (2) Max Delta = 15 mOhm
18. Mating/Unmating Force (3)			18. Mating/Unmating Force (3)

(1) Humidity = EIA-364-31

Test Condition = B (240 Hours)

Test Method = III (+25oC to +65tC @ 90% RH to 98% RH)

Test Exceptions: ambient pre-condition and delete steps 7a and 7b

(2) LLCR = EIA-364-23

Open Circuit Voltage = 20 mV Max

Test Current = 100 mA Max

(3) Mating/Unmating Force = EIA-364-13

(4) Thermal Shock = EIA-364-32

Exposure Time at Temperature Extremes = 1/2 Hour

Method A, Test Condition = I (-55oC to +85tC)

Test Duration = A-3 (100 Cycles)

**FLOWCHARTS Continued****IR/DWV****Pin-to-Pin****Group 1**

MB1-130-01-L-S-02-SL  
0.056" EDGE CARD  
2 Assemblies  
Lower Card Thickness

Step	Description
1.	DWV Breakdown (2)

**Group 2**

MB1-130-01-L-S-02-SL  
2 Assemblies

Step	Description
1.	DWV Breakdown (2)

**Group 3**

MB1-130-01-L-S-02-SL  
0.056" EDGE CARD  
2 Assemblies  
Lower Card Thickness

Step	Description
1.	IR (4)
2.	DWV at Test Voltage (1)
3.	Thermal Shock (5)
4.	IR (4)
5.	DWV at Test Voltage (1)
6.	Humidity (3)
7.	IR (4)
8.	DWV at Test Voltage (1)

- 
- (1) DWV at Test Voltage = EIA-364-20  
Test Condition = 1 (Sea Level)  
DWV test voltage is equal to 75% of the lowest breakdown voltage  
Test voltage applied for 60 seconds
- (2) DWV Breakdown = EIA-364-20  
Test Condition = 1 (Sea Level)  
DWV test voltage is equal to 75% of the lowest breakdown voltage  
Test voltage applied for 60 seconds
- (3) Humidity = EIA-364-31  
Test Condition = B (240 Hours)  
Test Method = III (+25°C to +65°C @ 90% RH to 98% RH)  
Test Exceptions: ambient pre-condition and delete steps 7a and 7b
- (4) IR = EIA-364-21  
Test Condition = 500 Vdc, 2 Minutes Max
- (5) Thermal Shock = EIA-364-32  
Exposure Time at Temperature Extremes = 1/2 Hour  
Method A, Test Condition = I (-55°C to +85°C)  
Test Duration = A-3 (100 Cycles)

**FLOWCHARTS Continued****Current Carrying Capacity****Lower Board Thickness**Group 1

MB1-150-01-L-S-02-SL  
0.056" EDGE CARD  
1 Pins Powered  
Signal

**Step Description**

- | Step | Description   |
|------|---|
| 1.   | CCC <sup>(1)</sup><br>Rows = 1<br>Number of Positions = 1 |

Group 2

MB1-150-01-L-S-02-SL  
0.056" EDGE CARD  
2 Pins Powered  
Signal

**Step Description**

- | Step | Description   |
|------|---|
| 1.   | CCC <sup>(1)</sup><br>Rows = 1<br>Number of Positions = 2 |

Group 3

MB1-150-01-L-S-02-SL  
0.056" EDGE CARD  
3 Pins Powered  
Signal

**Step Description**

- | Step | Description   |
|------|---|
| 1.   | CCC <sup>(1)</sup><br>Rows = 1<br>Number of Positions = 3 |

Group 4

MB1-150-01-L-S-02-SL  
0.056" EDGE CARD  
4 Pins Powered  
Signal

**Step Description**

- | Step | Description   |
|------|---|
| 1.   | CCC <sup>(1)</sup><br>Rows = 1<br>Number of Positions = 4 |

Group 5

MB1-150-01-L-S-02-SL  
0.056" EDGE CARD  
50 Pins Powered  
Signal

**Step Description**

- | Step | Description  |
|------|--|
| 1.   | CCC <sup>(1)</sup><br>Rows = 1<br>Number of Positions = 50 |

(1) CCC = EIA-364-70

Method 2, Temperature Rise Versus Current Curve

(TIN PLATING) - Tabulate calculated current at RT, 65°C, 75°C and 95°C after derating 20% and based on 105°C

(GOLD PLATING) - Tabulate calculated current at RT, 85°C, 95°C and 115°C after derating 20% and based on 125°C

**FLOWCHARTS Continued****Mechanical Shock/Random Vibration/LLCR**Group 1

MB1-130-01-L-S-02-SL  
0.056" EDGE CARD  
8 Assemblies  
Lower Board Thickness

**Step Description**

1. LLCR <sup>(1)</sup>  
Max Delta = 15 mOhm
2. Mechanical Shock <sup>(2)</sup>
3. Random Vibration <sup>(3)</sup>
4. LLCR <sup>(1)</sup>  
Max Delta = 15 mOhm

Group 2

MB1-130-01-L-S-02-SL  
0.068" EDGE CARD  
8 Assemblies  
Upper Board Thickness

**Step Description**

1. LLCR <sup>(1)</sup>  
Max Delta = 15 mOhm
2. Mechanical Shock <sup>(2)</sup>
3. Random Vibration <sup>(3)</sup>
4. LLCR <sup>(1)</sup>  
Max Delta = 15 mOhm

(1) LLCR = EIA-364-23

Open Circuit Voltage = 20 mV Max  
Test Current = 100 mA Max

(2) Mechanical Shock = EIA-364-27

Test Condition = C (100 G Peak, 6 milliseconds, Half Sine)  
Number of Shocks = 3 Per Direction, Per Axis, 18 Total

(3) Random Vibration = EIA-364-28

Condition = VB (7.56 gRMS Average, 2 Hours/Axis)

**Mechanical Shock/Random Vibration/Event Detection**Group 1

MB1-130-01-L-S-02-SL  
0.056" EDGE CARD  
60 Points  
Lower Board Thickness

**Step Description**

1. Nanosecond Event Detection  
(Mechanical Shock) <sup>(1)</sup>
2. Nanosecond Event Detection  
(Random Vibration) <sup>(2)</sup>

(1) Nanosecond Event Detection (Mechanical Shock)

Use EIA-364-87 for Nanosecond Event Detection:

Test Condition = F (50 nanoseconds at 10 ohms)

Use EIA-364-27 for Mechanical Shock:

Test Condition = C (100 G Peak, 6 milliseconds, Half Sine)

Number of Shocks = 3 Per Direction, Per Axis, 18 Total

(2) Nanosecond Event Detection (Random Vibration)

Use EIA-364-87 for Nanosecond Event Detection:

Test Condition = F (50 nanoseconds at 10 ohms)

Use EIA-364-28 for Random Vibration:

Condition = VB (7.56 gRMS Average, 2 Hours/Axis)

**FLOWCHARTS Continued****Extended Life***Note: Use 100 cycle group from Mate/Unmate Durability lower board thickness***Lower Board Thickness**

<u>Group 1</u>		<u>Group 2</u>		<u>Group 3</u>		<u>Group 4</u>	
MB1-130-01-S-S-02-SL		MB1-130-01-S-S-02-SL		MB1-130-01-S-S-02-SL		MB1-130-01-S-S-02-SL	
0.056" EDGE CARD		0.056" EDGE CARD		0.056" EDGE CARD		0.056" EDGE CARD	
8 Assemblies		8 Assemblies		8 Assemblies		8 Assemblies	
250 Cycles		500 Cycles		1000 Cycles		2500 Cycles	
Step	Description	Step	Description	Step	Description	Step	Description
1.	Plating Thickness Verification (4)						
2.	LLCR (2) Max Delta = 15 mOhm	2.	LLCR (2) Max Delta = 15 mOhm	2.	LLCR (2) Max Delta = 15 mOhm	2.	LLCR (2) Max Delta = 15 mOhm
3.	Cycles Quantity = 250 Cycles	3.	Cycles Quantity = 500 Cycles	3.	Cycles Quantity = 1000 Cycles	3.	Cycles Quantity = 2500 Cycles
4.	LLCR (2) Max Delta = 15 mOhm	4.	LLCR (2) Max Delta = 15 mOhm	4.	LLCR (2) Max Delta = 15 mOhm	4.	LLCR (2) Max Delta = 15 mOhm
5.	Thermal Shock (5)						
6.	LLCR (2) Max Delta = 15 mOhm	6.	LLCR (2) Max Delta = 15 mOhm	6.	LLCR (2) Max Delta = 15 mOhm	6.	LLCR (2) Max Delta = 15 mOhm
7.	Humidity (1)						
8.	LLCR (2) Max Delta = 15 mOhm	8.	LLCR (2) Max Delta = 15 mOhm	8.	LLCR (2) Max Delta = 15 mOhm	8.	LLCR (2) Max Delta = 15 mOhm
9.	Photos (3)						

**(1) Humidity = EIA-364-31**

Test Condition = B (240 Hours)

Test Method = III (+25°C to +65°C @ 90% RH to 98% RH)

Test Exceptions: ambient pre-condition and delete steps 7a and 7b

**(2) LLCR = EIA-364-23**

Open Circuit Voltage = 20 mV Max

Test Current = 100 mA Max

**(3) Photos**

Attach 2-3 photos of contact area

**(4) Plating Thickness Verification**

Measure, verify, and document plating thickness on both male and female (one group only)

Plating thickness to be measured on loose pins used during assembly

**(5) Thermal Shock = EIA-364-32**

Exposure Time at Temperature Extremes = 1/2 Hour

Method A, Test Condition = I (-55°C to +85°C)

Test Duration = A-3 (100 Cycles)

## ATTRIBUTE DEFINITIONS

The following is a brief, simplified description of attributes.

### THERMAL SHOCK:

- 1) EIA-364-32, *Thermal Shock (Temperature Cycling) Test Procedure for Electrical Connectors*.
- 2) Test Condition 1: -55°C to +85°C
- 3) Test Time: ½ hour dwell at each temperature extreme
- 4) Number of Cycles: 100
- 5) All test samples are pre-conditioned at ambient.
- 6) All test samples are exposed to environmental stressing in the mated condition.

### THERMAL:

- 1) EIA-364-17, *Temperature Life with or without Electrical Load Test Procedure for Electrical Connectors*.
- 2) Test Condition 4 at 105° C
- 3) Test Time Condition B for 250 hours.
- 4) All test samples are pre-conditioned at ambient.
- 5) All test samples are exposed to environmental stressing in the mated condition.

### HUMIDITY:

- 1) Reference document: EIA-364-31, *Humidity Test Procedure for Electrical Connectors*.
- 2) Test Condition B, 240 Hours.
- 3) Method III, +25° C to + 65° C, 90% to 98% Relative Humidity excluding sub-cycles 7a and 7b.
- 4) All samples are pre-conditioned at ambient.
- 5) All test samples are exposed to environmental stressing in the mated condition.

### MECHANICAL SHOCK (Specified Pulse):

- 1) Reference document: EIA-364-27, *Mechanical Shock Test Procedure for Electrical Connectors*
- 2) Test Condition C
- 3) Peak Value: 100 G
- 4) Duration: 6 Milliseconds
- 5) Wave Form: Half Sine
- 6) Velocity: 12.3 ft/s
- 7) Number of Shocks: 3 Shocks / Direction, 3 Axis (18 Total)

### VIBRATION:

- 1) Reference document: EIA-364-28, *Vibration Test Procedure for Electrical Connectors*
- 2) Test Condition V, Letter B
- 3) Power Spectral Density: 0.04 G<sup>2</sup> / Hz
- 4) G 'RMS': 7.56
- 5) Frequency: 50 to 2000 Hz
- 6) Duration: 2.0 Hours per axis (3 axis total)

### NANOSECOND-EVENT DETECTION:

- 1) Reference document: EIA-364-87, *Nanosecond-Event Detection for Electrical Connectors*
- 2) Prior to test, the samples were characterized to assure the low nanosecond event being monitored will trigger the detector.
- 3) After characterization it was determined the test samples could be monitored for 50 nanosecond events

### MATING/UNMATING:

- 1) Reference document: EIA-364-13, *Mating and Unmating Forces Test Procedure for Electrical Connectors*.
- 2) The full insertion position was to within 0.003" to 0.004" of the plug bottoming out in the receptacle to prevent damage to the system under test.
- 3) One of the mating parts is secured to a floating X-Y table to prevent damage during cycling.

**ATTRIBUTE DEFINITIONS Continued**

The following is a brief, simplified description of attributes.

**TEMPERATURE RISE (Current Carrying Capacity, CCC):**

- 1) EIA-364-70, *Temperature Rise versus Current Test Procedure for Electrical Connectors and Sockets*.
- 2) When current passes through a contact, the temperature of the contact increases as a result of  $I^2R$  (resistive) heating.
- 3) The number of contacts being investigated plays a significant part in power dissipation and therefore temperature rise.
- 4) The size of the temperature probe can affect the measured temperature.
- 5) Copper traces on PC boards will contribute to temperature rise:
  - a. Self heating (resistive)
  - b. Reduction in heat sink capacity affecting the heated contacts
- 6) A de-rating curve, usually 20%, is calculated.
- 7) Calculated de-rated currents at three temperature points are reported:
  - a. Ambient
  - b. 85° C
  - c. 95° C
  - d. 115° C
- 8) Typically, neighboring contacts (in close proximity to maximize heat build up) are energized.
- 9) The thermocouple (or temperature measuring probe) will be positioned at a location to sense the maximum temperature in the vicinity of the heat generation area.
- 10) A computer program, *TR 803.exe*, ensures accurate stability for data acquisition.
- 11) Hook-up wire cross section is larger than the cross section of any connector leads/PC board traces, jumpers, etc.
- 12) Hook-up wire length is longer than the minimum specified in the referencing standard.

**LLCR:**

- 1) EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 2) A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 3) The following guidelines are used to categorize the changes in LLCR as a result from stressing
  - a.  $\leq +5.0$  mOhms:----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms:----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms:----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms:----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms:----- Unstable
  - f.  $>+2000$  mOhms:----- Open Failure

**ATTRIBUTE DEFINITIONS Continued**

The following is a brief, simplified description of attributes.

**GAS TIGHT:**

To provide method for evaluating the ability of the contacting surfaces in preventing penetration of harsh vapors which might lead to oxide formation that may degrade the electrical performance of the contact system.

- 1) EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 2) A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 3) The following guidelines are used to categorize the changes in LLCR as a result from stressing
  - a.  $\leq +5.0$  mOhms:----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms:----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms:----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms:----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms:----- Unstable
  - f.  $>+2000$  mOhms:----- Open Failure
- 4) Procedure:
  - a. Reference document: EIA-364-36, *Test Procedure for Determination of Gas-Tight Characteristics for Electrical Connectors, Sockets and/or Contact Systems*.
  - b. Test Conditions:
    - i. Class II--- Mated pairs of contacts assembled to their plastic housings.
    - ii. Reagent grade Nitric Acid shall be used of sufficient volume to saturate the test chamber
    - iii. The ratio of the volume of the test chamber to the surface area of the acid shall be 10:1.
    - iv. The chamber shall be saturated with the vapor for at least 15 minutes before samples are added.
    - v. Exposure time, 55 to 65 minutes.
    - vi. The samples shall be no closer to the chamber walls than 1 inches and no closer to the surface of the acid than 3 inches.
    - vii. The samples shall be dried after exposure for a minimum of 1 hour.
    - viii. Drying temperature  $50^{\circ}$  C
    - ix. The final LLCR shall be conducted within 1 hour after drying.

**ATTRIBUTE DEFINITIONS Continued**

The following is a brief, simplified description of attributes

**NORMAL FORCE (FOR CONTACTS TESTED IN THE HOUSING):**

- 1) Reference document: EIA-364-04, *Normal Force Test Procedure for Electrical Connectors*.
- 2) The contacts shall be tested in the connector housing.
- 3) If necessary, a "window" shall be made in the connector body to allow a probe to engage and deflect the contact at the same attitude and distance (plus 0.05 mm [0.002"]) as would occur in actual use.
- 4) The connector housing shall be placed in a holding fixture that does not interfere with or otherwise influence the contact force or deflection.
- 5) Said holding fixture shall be mounted on a floating, adjustable, X-Y table on the base of the Dillon TC<sup>2</sup>, computer controlled test stand with a deflection measurement system accuracy of 5.0 μm (0.0002").
- 6) The nominal deflection rate shall be 5 mm (0.2")/minute.
- 7) Unless otherwise noted a minimum of five contacts shall be tested.
- 8) The force/deflection characteristic to load and unload each contact shall be repeated five times.
- 9) The system shall utilize the TC<sup>2</sup> software in order to acquire and record the test data.
- 10) The permanent set of each contact shall be measured within the TC<sup>2</sup> software.
- 11) The acquired data shall be graphed with the deflection data on the X-axis and the force data on the Y-axis and a print out will be stored with the Tracking Code paperwork.

**ATTRIBUTE DEFINITIONS Continued**

The following is a brief, simplified description of attributes

**INSULATION RESISTANCE (IR):**

To determine the resistance of insulation materials to leakage of current through or on the surface of these materials when a DC potential is applied.

- 1) PROCEDURE:
  - a. Reference document: EIA-364-21, *Insulation Resistance Test Procedure for Electrical Connectors*.
  - b. Test Conditions:
    - i. Between Adjacent Contacts or Signal-to-Ground
    - ii. Electrification Time 2.0 minutes
    - iii. Test Voltage (500 VDC) corresponds to calibration settings for measuring resistances.
- 2) MEASUREMENTS:
- 3) When the specified test voltage is applied (VDC), the insulation resistance shall not be less than 5000 megohms.

**DIELECTRIC WITHSTANDING VOLTAGE (DWV):**

To determine if the sockets can operate at its rated voltage and withstand momentary over potentials due to switching, surges, and other similar phenomenon. Separate samples are used to evaluate the effect of environmental stresses so not to influence the readings from arcing that occurs during the measurement process.

- 1) PROCEDURE:
  - a. Reference document: EIA-364-20, *Withstanding Voltage Test Procedure for Electrical Connectors*.
  - b. Test Conditions:
    - i. Between Adjacent Contacts or Signal-to-Ground
    - ii. Barometric Test Condition 1
    - iii. Rate of Application 500 V/Sec
    - iv. Test Voltage (VAC) until breakdown occurs
- 2) MEASUREMENTS/CALCULATIONS
  - a. The breakdown voltage shall be measured and recorded.
  - b. The dielectric withstanding voltage shall be recorded as 75% of the minimum breakdown voltage.
  - c. The working voltage shall be recorded as one-third (1/3) of the dielectric withstanding voltage (one-fourth of the breakdown voltage).

## RESULTS

### Temperature Rise, CCC at a 20% de-rating

- CCC for a 30°C Temperature Rise -----2.4 A per contact with 1 contacts (1 x 1) powered
- CCC for a 30°C Temperature Rise -----1.8 A per contact with 2 contacts (1 x 2) powered
- CCC for a 30°C Temperature Rise -----1.6 A per contact with 3 contacts (1 x 3) powered
- CCC for a 30°C Temperature Rise -----1.5 A per contact with 4 contacts (1 x 4) powered
- CCC for a 30°C Temperature Rise -----0.8 A per contact with 50 contacts (1 x 50) powered

### Mating/Unmating Forces

#### Thermal Aging Group

#### MB1-130-01-L-S-02-SL/EDGE CARD 0.056"

- **Initial**
  - **Mating**
    - Min ----- 1.16 Lbs
    - Max----- 1.49 Lbs
  - **Unmating**
    - Min ----- 0.96 Lbs
    - Max----- 1.16 Lbs
- **After Thermal**
  - **Mating**
    - Min ----- 0.94 Lbs
    - Max----- 1.30 Lbs
  - **Unmating**
    - Min ----- 0.78 Lbs
    - Max----- 1.23 Lbs

#### MB1-130-01-L-S-02-SL/EDGE CARD 0.068"

- **Initial**
  - **Mating**
    - Min ----- 1.67 Lbs
    - Max----- 2.17 Lbs
  - **Unmating**
    - Min ----- 1.44 Lbs
    - Max----- 1.84 Lbs
- **After Thermal**
  - **Mating**
    - Min ----- 1.47 Lbs
    - Max----- 1.94 Lbs
  - **Unmating**
    - Min ----- 1.11 Lbs
    - Max----- 1.80 Lbs

**RESULTS Continued****Mating/Unmating Forces**

Mating-Unmating Durability Group (MB1-130-01-L-S-02-SL/EDGE CARD 0.056")

- **Initial**
  - **Mating**
    - **Min** ----- 0.98 Lbs
    - **Max** ----- 1.27 Lbs
  - **Unmating**
    - **Min** ----- 0.83 Lbs
    - **Max** ----- 1.20 Lbs
- **After 25 Cycles**
  - **Mating**
    - **Min** ----- 1.08 Lbs
    - **Max** ----- 1.50 Lbs
  - **Unmating**
    - **Min** ----- 1.04 Lbs
    - **Max** ----- 1.57 Lbs
- **After 50 Cycles**
  - **Mating**
    - **Min** ----- 1.33 Lbs
    - **Max** ----- 1.68 Lbs
  - **Unmating**
    - **Min** ----- 1.25 Lbs
    - **Max** ----- 1.77 Lbs
- **After 75 Cycles**
  - **Mating**
    - **Min** ----- 1.24 Lbs
    - **Max** ----- 1.78 Lbs
  - **Unmating**
    - **Min** ----- 1.31 Lbs
    - **Max** ----- 1.91 Lbs
- **After 100 Cycles**
  - **Mating**
    - **Min** ----- 1.29 Lbs
    - **Max** ----- 1.85 Lbs
  - **Unmating**
    - **Min** ----- 1.48 Lbs
    - **Max** ----- 2.01 Lbs
- **Humidity**
  - **Mating**
    - **Min** ----- 0.95 Lbs
    - **Max** ----- 1.21 Lbs
  - **Unmating**
    - **Min** ----- 0.81 Lbs
    - **Max** ----- 1.07 Lbs

**RESULTS Continued****Mating/Unmating Forces**

Mating-Unmating Durability Group (MB1-130-01-L-S-02-SL/EDGE CARD 0.068")

- **Initial**
  - **Mating**
    - **Min** ----- 1.59 Lbs
    - **Max** ----- 1.79 Lbs
  - **Unmating**
    - **Min** ----- 1.33 Lbs
    - **Max** ----- 1.67 Lbs
- **After 25 Cycles**
  - **Mating**
    - **Min** ----- 1.85 Lbs
    - **Max** ----- 2.53 Lbs
  - **Unmating**
    - **Min** ----- 1.72 Lbs
    - **Max** ----- 2.22 Lbs
- **After 50 Cycles**
  - **Mating**
    - **Min** ----- 2.03 Lbs
    - **Max** ----- 2.52 Lbs
  - **Unmating**
    - **Min** ----- 2.06 Lbs
    - **Max** ----- 2.69 Lbs
- **After 75 Cycles**
  - **Mating**
    - **Min** ----- 2.19 Lbs
    - **Max** ----- 2.60 Lbs
  - **Unmating**
    - **Min** ----- 2.20 Lbs
    - **Max** ----- 2.97 Lbs
- **After 100 Cycles**
  - **Mating**
    - **Min** ----- 2.30 Lbs
    - **Max** ----- 2.68 Lbs
  - **Unmating**
    - **Min** ----- 2.45 Lbs
    - **Max** ----- 3.18 Lbs
- **Humidity**
  - **Mating**
    - **Min** ----- 1.39 Lbs
    - **Max** ----- 1.59 Lbs
  - **Unmating**
    - **Min** ----- 1.22 Lbs
    - **Max** ----- 1.41 Lbs

**RESULTS Continued****Mating/Unmating Forces**

Mating-Unmating Durability Group (MB1-120-01-L-S-02-SL/EDGE CARD 0.068")

- **Initial**
  - **Mating**
    - **Min** ----- 1.23 Lbs
    - **Max** ----- 1.69 Lbs
  - **Unmating**
    - **Min** ----- 0.88 Lbs
    - **Max** ----- 1.26 Lbs
- **After 25 Cycles**
  - **Mating**
    - **Min** ----- 1.30 Lbs
    - **Max** ----- 1.87 Lbs
  - **Unmating**
    - **Min** ----- 1.09 Lbs
    - **Max** ----- 1.72 Lbs
- **After 50 Cycles**
  - **Mating**
    - **Min** ----- 1.22 Lbs
    - **Max** ----- 1.97 Lbs
  - **Unmating**
    - **Min** ----- 1.08 Lbs
    - **Max** ----- 1.87 Lbs
- **After 75 Cycles**
  - **Mating**
    - **Min** ----- 1.30 Lbs
    - **Max** ----- 2.01 Lbs
  - **Unmating**
    - **Min** ----- 1.05 Lbs
    - **Max** ----- 1.95 Lbs
- **After 100 Cycles**
  - **Mating**
    - **Min** ----- 1.34 Lbs
    - **Max** ----- 2.13 Lbs
  - **Unmating**
    - **Min** ----- 1.09 Lbs
    - **Max** ----- 2.04 Lbs

**RESULTS Continued****Mating/Unmating Forces**

Mating-Unmating Durability Group (MB1-150-01-L-S-02-SL/EDGE CARD 0.068")

- **Initial**
  - **Mating**
    - **Min** ----- 2.55 Lbs
    - **Max** ----- 3.31 Lbs
  - **Unmating**
    - **Min** ----- 1.98 Lbs
    - **Max** ----- 3.37 Lbs
- **After 25 Cycles**
  - **Mating**
    - **Min** ----- 3.02 Lbs
    - **Max** ----- 3.76 Lbs
  - **Unmating**
    - **Min** ----- 2.57 Lbs
    - **Max** ----- 3.42 Lbs
- **After 50 Cycles**
  - **Mating**
    - **Min** ----- 3.29 Lbs
    - **Max** ----- 4.03 Lbs
  - **Unmating**
    - **Min** ----- 2.96 Lbs
    - **Max** ----- 3.82 Lbs
- **After 75 Cycles**
  - **Mating**
    - **Min** ----- 3.49 Lbs
    - **Max** ----- 4.08 Lbs
  - **Unmating**
    - **Min** ----- 3.18 Lbs
    - **Max** ----- 4.08 Lbs
- **After 100 Cycles**
  - **Mating**
    - **Min** ----- 3.14 Lbs
    - **Max** ----- 4.20 Lbs
  - **Unmating**
    - **Min** ----- 3.47 Lbs
    - **Max** ----- 4.25 Lbs

**Normal Force at 0.0274 inches deflection**

- **Initial**
  - **Min** ----- 66.70 gf      **Set** ---- 0.0000 in
  - **Max** ----- 72.00 gf      **Set** ---- 0.0003 in
- **Thermal**
  - **Min** ----- 52.00 gf      **Set** ---- 0.0036 in
  - **Max** ----- 63.40 gf      **Set** ---- 0.0067 in

**RESULTS Continued****Insulation Resistance minimums, IR**

- **Initial**
  - Mated-----10000 Meg  $\Omega$  ----- Passed
  - Unmated ----- 10000 Meg  $\Omega$  ----- Passed
- **Thermal Shock**
  - Mated----- 10000 Meg  $\Omega$  ----- Passed
  - Unmated ----- 10000 Meg  $\Omega$  ----- Passed
- **Humidity**
  - Mated-----10000 Meg  $\Omega$  ----- Passed
  - Unmated -----10000 Meg  $\Omega$  ----- Passed

**Dielectric Withstanding Voltage minimums, DWV**

- **Minimums**
  - Breakdown Voltage----- 1000 VAC
  - Test Voltage -----750 VAC
  - Working Voltage ----- 250 VAC
- **Initial DWV -----Passed**
- **Thermal DWV-----Passed**
- **Humidity DWV-----Passed**

**RESULTS Continued****LLCR Thermal Aging Group (192 LLCR test points)**

MB1-130-01-L-S-02-SL/EDGE CARD 0.056"

- Initial ----- 22.90 mOhms Max
- Thermal
  - <= +5.0 mOhms ----- 165 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 24 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 3 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure

MB1-130-01-L-S-02-SL/EDGE CARD 0.068"

- Initial ----- 21.47 mOhms Max
- Thermal
  - <= +5.0 mOhms ----- 182 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 10 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure

**LLCR Gas Tight Group (192 LLCR test points)**

MB1-130-01-L-S-02-SL/EDGE CARD 0.056"

- Initial ----- 24.02 mOhms Max
- Gas-Tight
  - <= +5.0 mOhms ----- 188 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 4 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure

**RESULTS Continued****LLCR Mating/Unmating Durability Group (192 LLCR test points)****MB1-130-01-L-S-02-SL/EDGE CARD 0.056"**

- **Initial** ----- 24.71 mOhms Max
- **Durability, 100 Cycles**
  - <= +5.0 mOhms ----- 181 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 11 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Thermal Shock**
  - <= +5.0 mOhms ----- 161 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 31 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 175 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 17 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure

**MB1-130-01-L-S-02-SL/EDGE CARD 0.068"**

- **Initial** ----- 23.30 mOhms Max
- **Durability, 100 Cycles**
  - <= +5.0 mOhms ----- 186 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 6 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Thermal Shock**
  - <= +5.0 mOhms ----- 152 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 40 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 170 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 22 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure

**RESULTS Continued****LLCR Shock & Vibration Group (192 LLCR test points)**

MB1-130-01-L-S-02-SL/EDGE CARD 0.056"

- **Initial** ----- 27.85 mOhms Max
- **Shock & Vibration**
  - **<= +5.0 mOhms** ----- 189 Points ----- Stable
  - **+5.1 to +10.0 mOhms** ----- 3 Points ----- Minor
  - **+10.1 to +15.0 mOhms** ----- 0 Points ----- Acceptable
  - **+15.1 to +50.0 mOhms** ----- 0 Points ----- Marginal
  - **+50.1 to +2000 mOhms** ----- 0 Points ----- Unstable
  - **>+2000 mOhms** ----- 0 Points ----- Open Failure

**Mechanical Shock & Random Vibration:**

- **Shock**
  - **No Damage**----- Pass
  - **50 Nanoseconds**----- Pass
- **Vibration**
  - **No Damage**----- Pass
  - **50 Nanoseconds**----- Pass

MB1-130-01-L-S-02-SL/EDGE CARD 0.068"

- **Initial** ----- 21.26 mOhms Max
- **Shock & Vibration**
  - **<= +5.0 mOhms** ----- 190 Points ----- Stable
  - **+5.1 to +10.0 mOhms** ----- 2 Points ----- Minor
  - **+10.1 to +15.0 mOhms** ----- 0 Points ----- Acceptable
  - **+15.1 to +50.0 mOhms** ----- 0 Points ----- Marginal
  - **+50.1 to +2000 mOhms** ----- 0 Points ----- Unstable
  - **>+2000 mOhms** ----- 0 Points ----- Open Failure

**RESULTS Continued****LLCR Mating/Unmating Durability 250 Cycles Group (192 LLCR test points)**

MB1-130-01-S-S-02-SL/EDGE CARD 0.056"

- **Initial** ----- 23.38 mOhms Max
- **Durability, 250 Cycles**
  - <= +5.0 mOhms ----- 182 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 10 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Thermal Shock**
  - <= +5.0 mOhms ----- 179 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 13 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 184 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 8 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure

**LLCR Mating/Unmating Durability 500 Cycles Group (192 LLCR test points)**

MB1-130-01-S-S-02-SL/EDGE CARD 0.056"

- **Initial** ----- 23.07 mOhms Max
- **Durability, 500 Cycles**
  - <= +5.0 mOhms ----- 189 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 3 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Thermal Shock**
  - <= +5.0 mOhms ----- 187 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 5 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 188 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 4 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure

**RESULTS Continued****LLCR Mating/Unmating Durability 1000 Cycles Group (192 LLCR test points)**

MB1-130-01-S-S-02-SL/EDGE CARD 0.056"

- **Initial** ----- 23.30 mOhms Max
- **Durability, 1000 Cycles**
  - <= +5.0 mOhms ----- 189 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 3 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Thermal Shock**
  - <= +5.0 mOhms ----- 188 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 4 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 188 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 4 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure

**LLCR Mating/Unmating Durability 2500 Cycles Group (192 LLCR test points)**

MB1-130-01-S-S-02-SL/EDGE CARD 0.056"

- **Initial** ----- 23.52 mOhms Max
- **Durability, 2500 Cycles**
  - <= +5.0 mOhms ----- 192 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 0 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Thermal Shock**
  - <= +5.0 mOhms ----- 189 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 2 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 1 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure
- **Humidity**
  - <= +5.0 mOhms ----- 180 Points ----- Stable
  - +5.1 to +10.0 mOhms ----- 12 Points ----- Minor
  - +10.1 to +15.0 mOhms ----- 0 Points ----- Acceptable
  - +15.1 to +50.0 mOhms ----- 0 Points ----- Marginal
  - +50.1 to +2000 mOhms ----- 0 Points ----- Unstable
  - >+2000 mOhms ----- 0 Points ----- Open Failure


## DATA SUMMARIES


### TEMPERATURE RISE (Current Carrying Capacity, CCC):

- 1) High quality thermocouples whose temperature slopes track one another were used for temperature monitoring.
- 2) The thermocouples were placed at a location to sense the maximum temperature generated during testing.
- 3) Temperature readings recorded are those for which three successive readings, 15 minutes apart, differ less than 1° C (computer controlled data acquisition).
- 4) Adjacent contacts were powered:
  - a. Linear configuration with 1 adjacent conductors/contacts powered

**293628**  
**1(1X1) Contacts in Linear series**  
**Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD**

*Current Rating per Contact (30 Deg. Rise, 20% Derated) = 2.4 Amps*

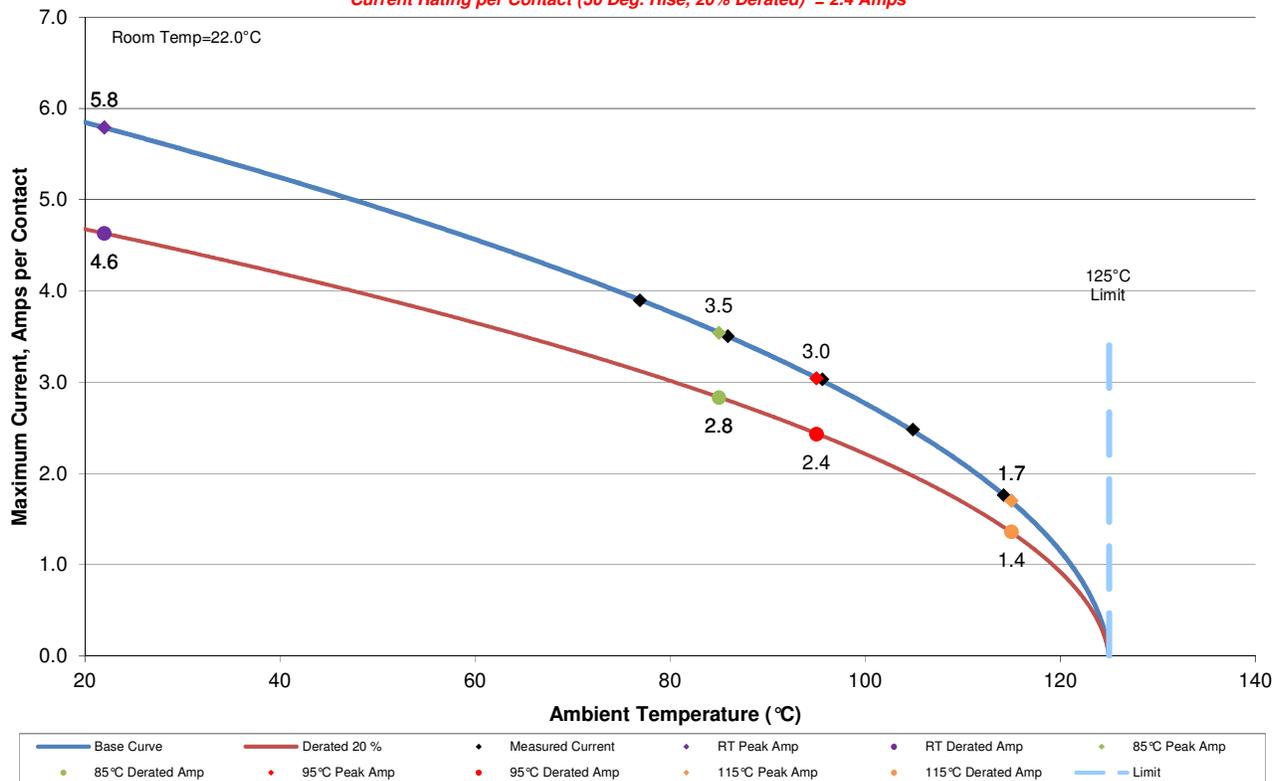

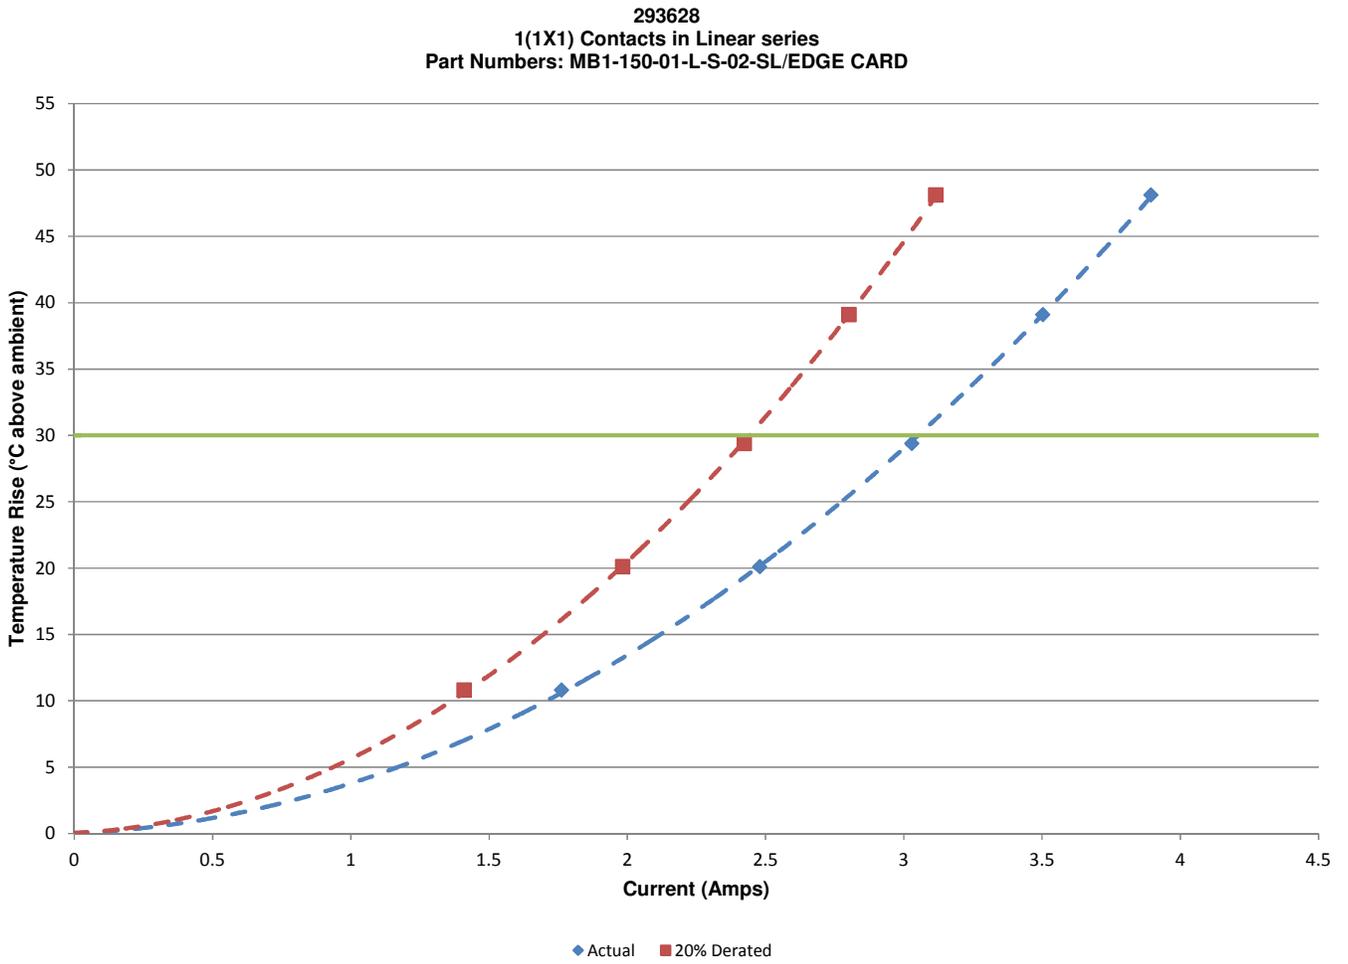


### DATA SUMMARIES Continued


b. Linear configuration with 2 adjacent conductors/contacts powered

293628  
 2(1X2) Contacts in Linear series  
 Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD

Current Rating per Contact (30 Deg. Rise, 20% Derated) = 1.8 Amps

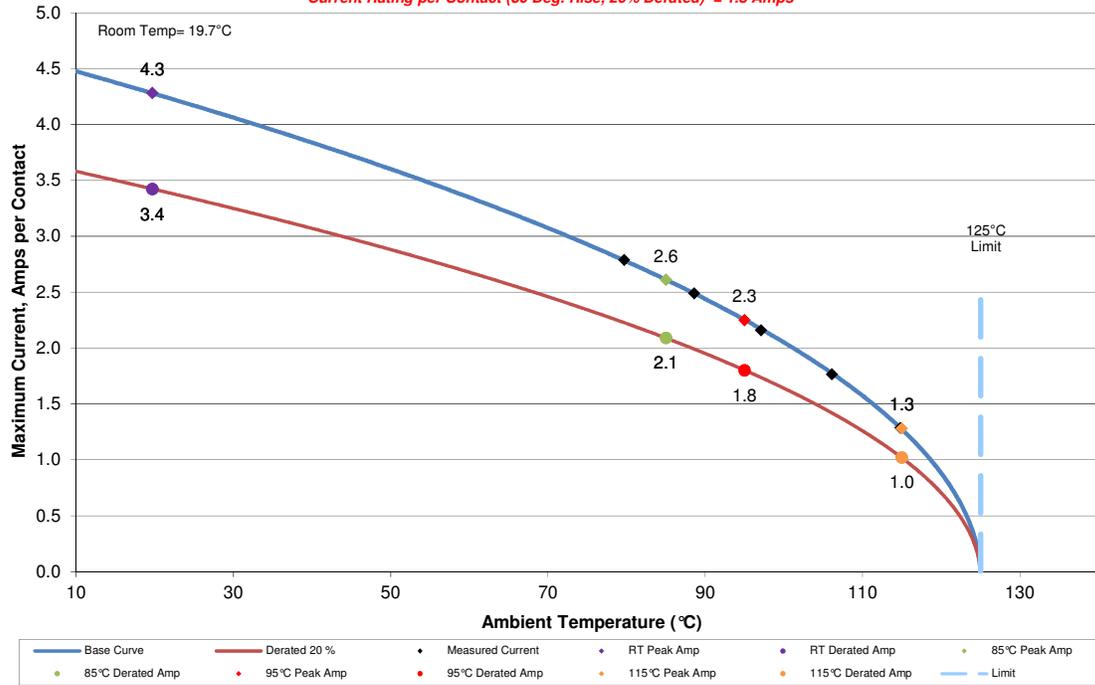

293628  
 2(1X2) Contacts in Linear series  
 Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD

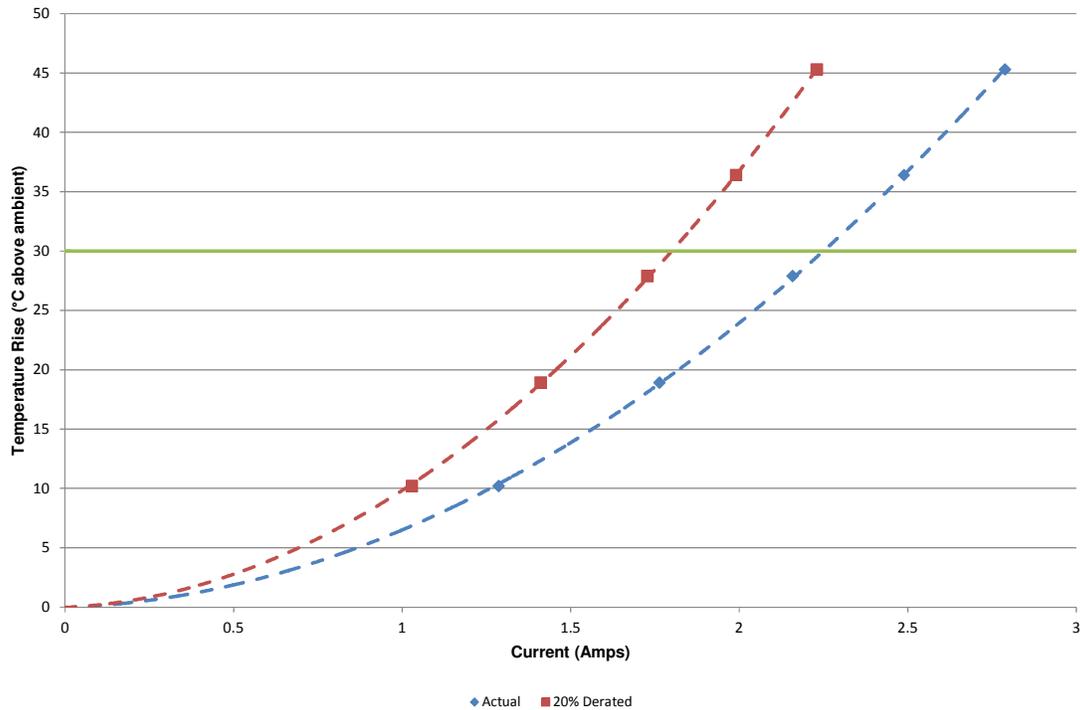


### DATA SUMMARIES Continued


c. Linear configuration with 3 adjacent conductors/contacts powered

293628  
3(1X3) Contacts in Linear series  
Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD

Current Rating per Contact (30 Deg. Rise, 20% Derated) = 1.6 Amps

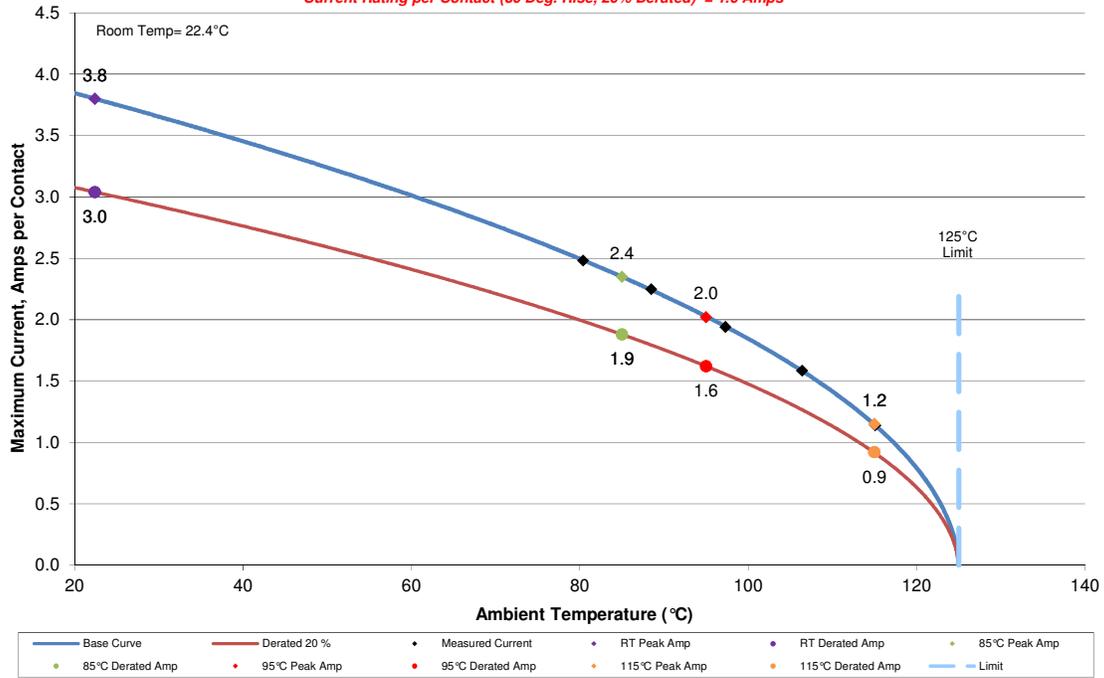


293628  
3(1X3) Contacts in Linear series  
Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD

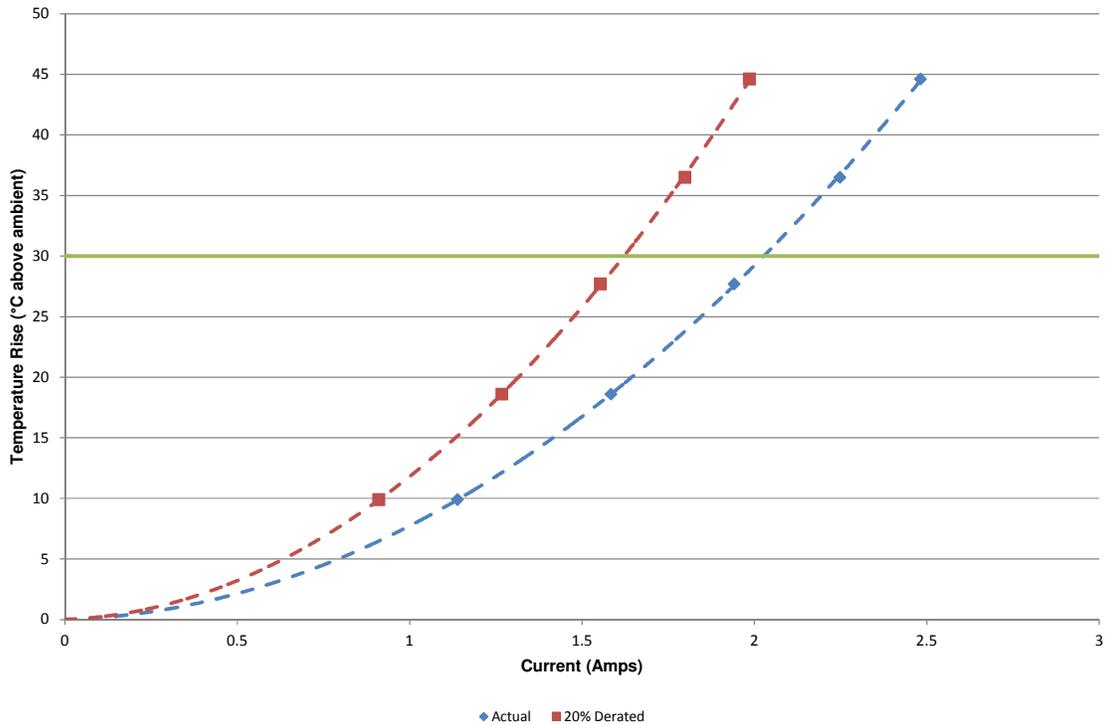


### DATA SUMMARIES Continued

d. Linear configuration with 4 adjacent conductors/contacts powered

293628  
4(1X4) Contacts in Linear series  
Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD

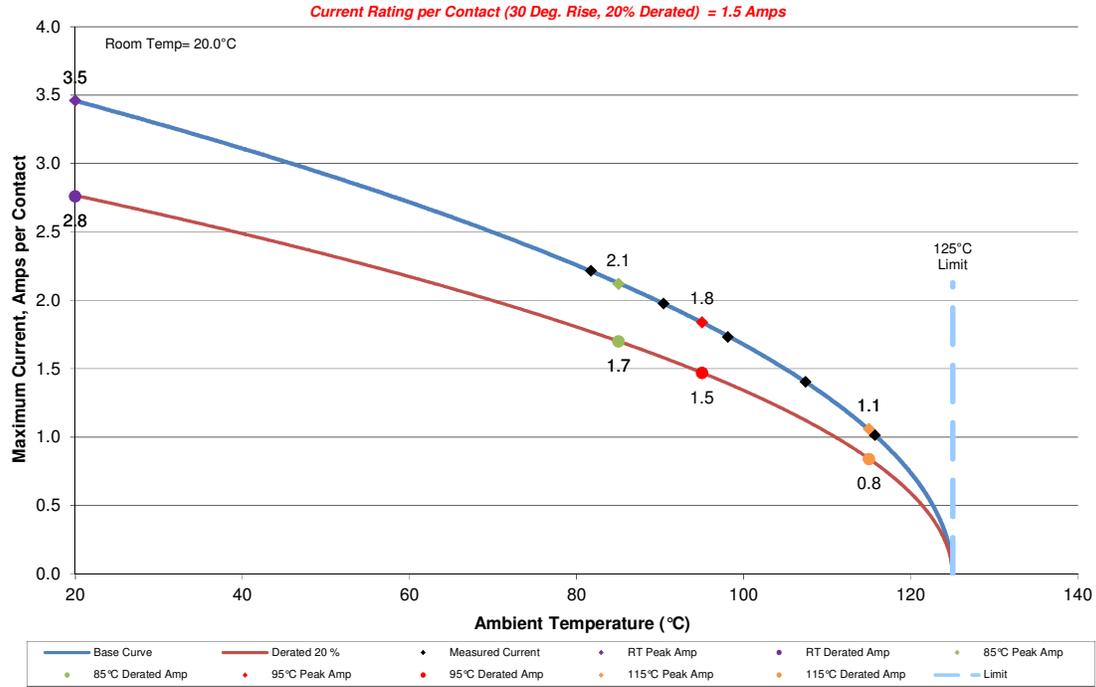

293628  
4(1X4) Contacts in Linear series  
Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD

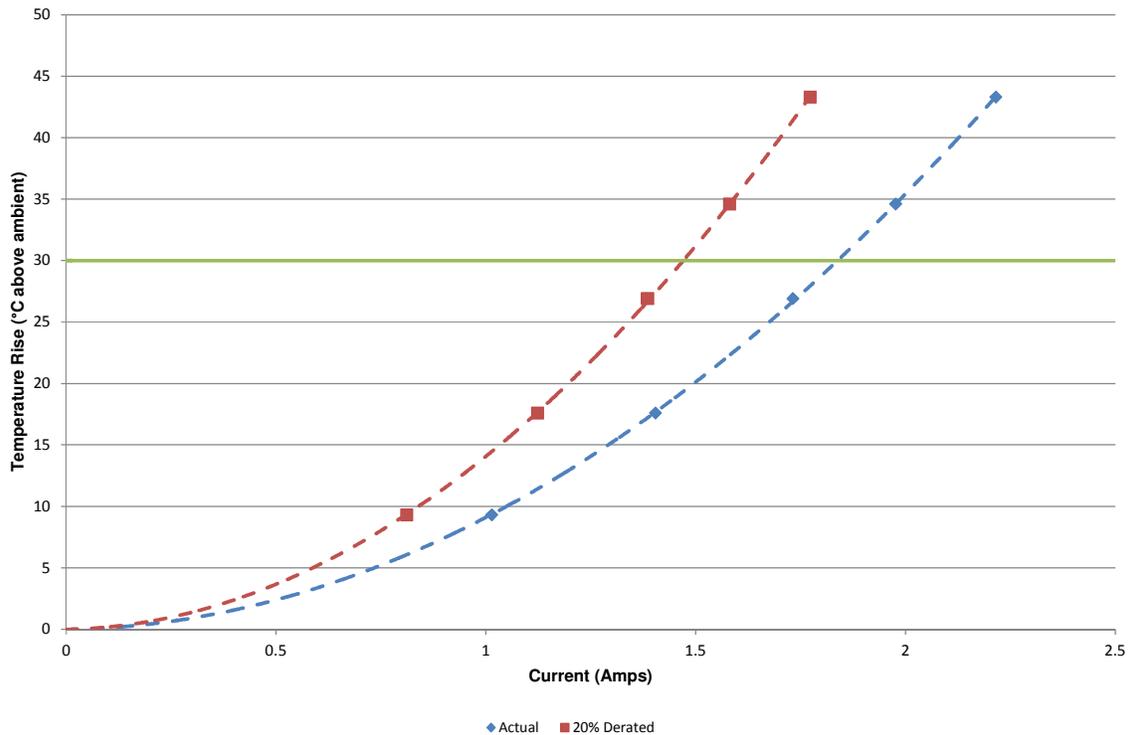


### DATA SUMMARIES Continued


e. Linear configuration with all adjacent conductors/contacts powered

293628  
50(All) Contacts in Linear series  
Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD

Current Rating per Contact (30 Deg. Rise, 20% Derated) = 0.8 Amps

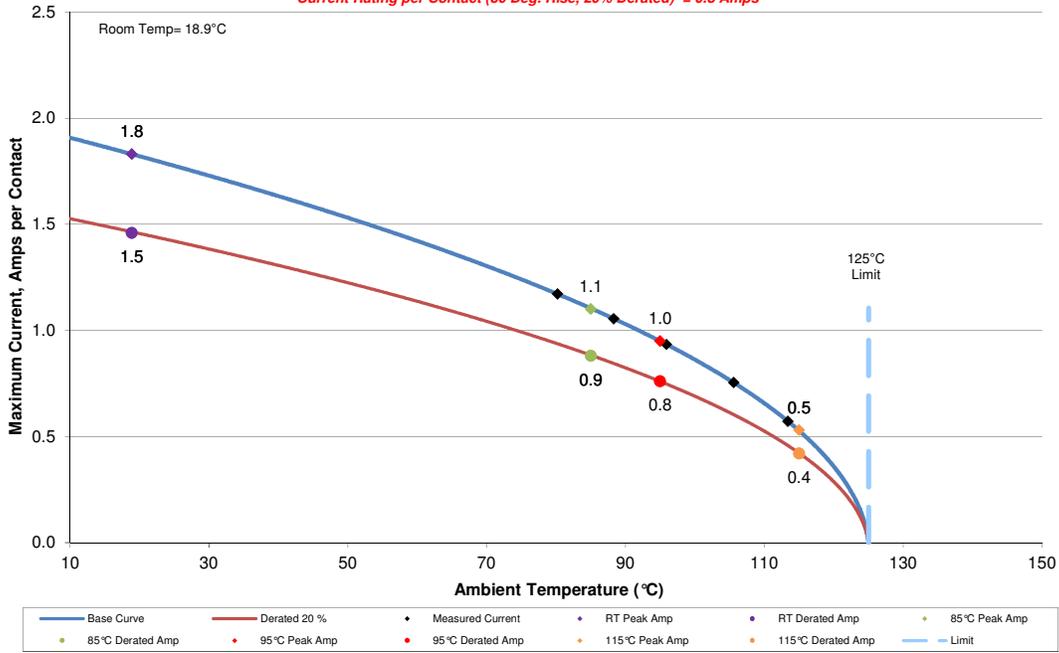

293628  
50(All) Contacts in Linear series  
Part Numbers: MB1-150-01-L-S-02-SL/EDGE CARD

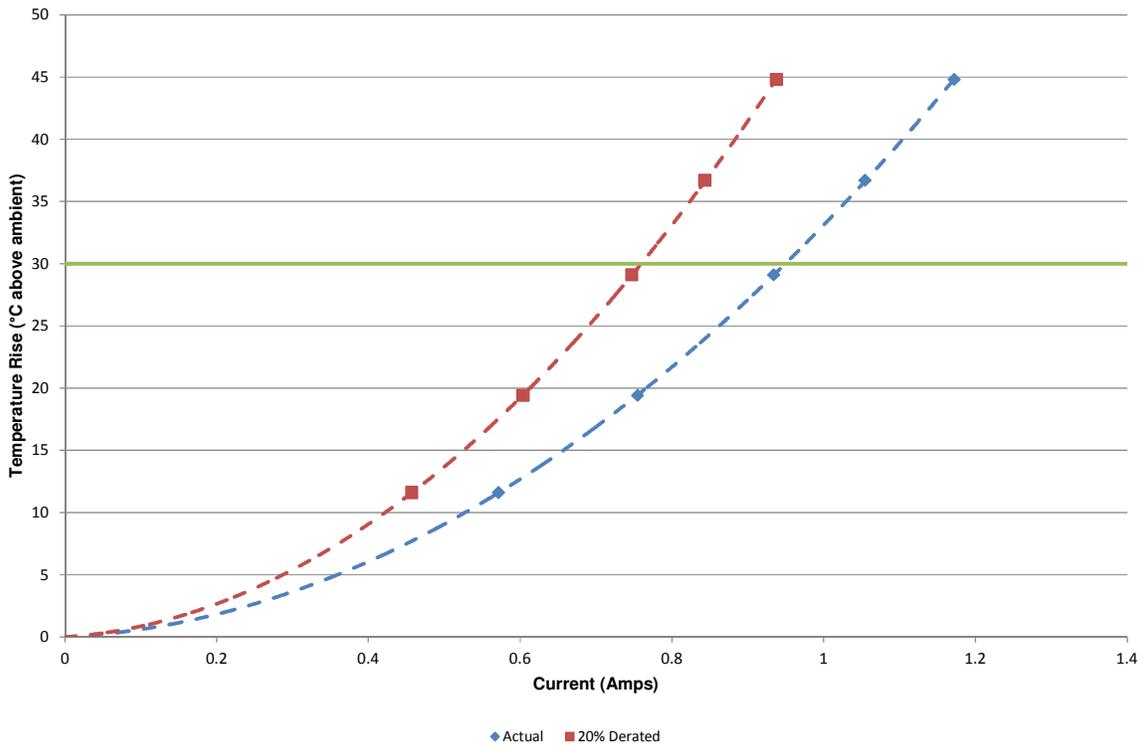

**DATA SUMMARIES Continued****MATING-UNMATING FORCE:**

Thermal Aging Group

MB1-130-01-L-S-02-SL/EDGE CARD 0.056"

	Initial				After Thermals			
	Mating		Unmating		Mating		Unmating	
	Newton's	Force (Lbs)	Newton's	Force (Lbs)	Newton's	Force (Lbs)	Newton's	Force (Lbs)
Minimum	5.16	1.16	4.27	0.96	4.18	0.94	3.47	0.78
Maximum	6.63	1.49	5.16	1.16	5.78	1.30	5.47	1.23
<b>Average</b>	5.79	<b>1.30</b>	4.71	<b>1.06</b>	5.18	<b>1.17</b>	4.56	<b>1.03</b>
St Dev	0.48	0.11	0.34	0.08	0.55	0.12	0.67	0.15
Count	8	8	8	8	8	8	8	8

MB1-130-01-L-S-02-SL/EDGE CARD 0.068"

	Initial				After Thermals			
	Mating		Unmating		Mating		Unmating	
	Newton's	Force (Lbs)	Newton's	Force (Lbs)	Newton's	Force (Lbs)	Newton's	Force (Lbs)
Minimum	7.43	1.67	6.41	1.44	6.54	1.47	4.94	1.11
Maximum	9.65	2.17	8.18	1.84	8.63	1.94	8.01	1.80
<b>Average</b>	8.63	<b>1.94</b>	7.09	<b>1.59</b>	7.72	<b>1.74</b>	6.16	<b>1.39</b>
St Dev	0.75	0.17	0.57	0.13	0.67	0.15	1.17	0.26
Count	8	8	8	8	8	8	8	8

**DATA SUMMARIES Continued****MATING-UNMATING FORCE:****Mating-Unmating Durability Group (MB1-130-01-L-S-02-SL/EDGE CARD 0.056")**

	Initial				After 25 Cycles			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	4.36	0.98	3.69	0.83	4.80	1.08	4.63	1.04
Maximum	5.65	1.27	5.34	1.20	6.67	1.50	6.98	1.57
<b>Average</b>	5.27	<b>1.19</b>	4.49	<b>1.01</b>	6.10	<b>1.37</b>	6.02	<b>1.35</b>
St Dev	0.50	0.11	0.50	0.11	0.67	0.15	0.71	0.16
Count	8	8	8	8	8	8	8	8
	After 50 Cycles				After 75 Cycles			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	5.92	1.33	5.56	1.25	5.52	1.24	5.83	1.31
Maximum	7.47	1.68	7.87	1.77	7.92	1.78	8.50	1.91
<b>Average</b>	6.89	<b>1.55</b>	6.90	<b>1.55</b>	6.96	<b>1.57</b>	7.47	<b>1.68</b>
St Dev	0.50	0.11	0.78	0.17	0.80	0.18	0.84	0.19
Count	8	8	8	8	8	8	8	8
	After 100 Cycles				After Humidity			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	5.74	1.29	6.58	1.48	4.23	0.95	3.60	0.81
Maximum	8.23	1.85	8.94	2.01	5.38	1.21	4.76	1.07
<b>Average</b>	7.22	<b>1.62</b>	7.78	<b>1.75</b>	4.92	<b>1.11</b>	4.18	<b>0.94</b>
St Dev	0.81	0.18	0.80	0.18	0.44	0.10	0.40	0.09
Count	8	8	8	8	8	8	8	8

**DATA SUMMARIES Continued****MATING-UNMATING FORCE:****Mating-Unmating Durability Group (MB1-130-01-L-S-02-SL/EDGE CARD 0.068")**

	Initial				After 25 Cycles			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	7.07	1.59	5.92	1.33	8.23	1.85	7.65	1.72
Maximum	7.96	1.79	7.43	1.67	11.25	2.53	9.87	2.22
<b>Average</b>	7.56	<b>1.70</b>	6.57	<b>1.48</b>	9.59	<b>2.16</b>	8.70	<b>1.96</b>
St Dev	0.29	0.06	0.52	0.12	0.97	0.22	0.78	0.17
Count	8	8	8	8	8	8	8	8
	After 50 Cycles				After 75 Cycles			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	9.03	2.03	9.16	2.06	9.74	2.19	9.79	2.20
Maximum	11.21	2.52	11.97	2.69	11.56	2.60	13.21	2.97
<b>Average</b>	10.33	<b>2.32</b>	10.11	<b>2.27</b>	10.81	<b>2.43</b>	11.18	<b>2.51</b>
St Dev	0.68	0.15	0.95	0.21	0.65	0.15	1.12	0.25
Count	8	8	8	8	8	8	8	8
	After 100 Cycles				After Humidity			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	10.23	2.30	10.90	2.45	6.18	1.39	5.43	1.22
Maximum	11.92	2.68	14.14	3.18	7.07	1.59	6.27	1.41
<b>Average</b>	11.19	<b>2.52</b>	12.00	<b>2.70</b>	6.63	<b>1.49</b>	5.87	<b>1.32</b>
St Dev	0.66	0.15	1.03	0.23	0.27	0.06	0.28	0.06
Count	8	8	8	8	8	8	8	8

**DATA SUMMARIES Continued****MATING-UNMATING FORCE:****Mating-Unmating Basic (MB1-120-01-L-S-02-SL/EDGE CARD 0.068")**

	Initial				After 25 Cycles			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	5.47	1.23	3.91	0.88	5.78	1.30	4.85	1.09
Maximum	7.52	1.69	5.60	1.26	8.32	1.87	7.65	1.72
<b>Average</b>	6.57	<b>1.48</b>	4.82	<b>1.08</b>	7.04	<b>1.58</b>	6.14	<b>1.38</b>
St Dev	0.71	0.16	0.60	0.13	0.74	0.17	0.91	0.20
Count	8	8	8	8	8	8	8	8
	After 50 Cycles				After 75 Cycles			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	5.43	1.22	4.80	1.08	5.78	1.30	4.67	1.05
Maximum	8.76	1.97	8.32	1.87	8.94	2.01	8.67	1.95
<b>Average</b>	7.36	<b>1.66</b>	6.63	<b>1.49</b>	7.63	<b>1.72</b>	6.86	<b>1.54</b>
St Dev	1.00	0.22	1.11	0.25	1.02	0.23	1.23	0.28
Count	8	8	8	8	8	8	8	8
	After 100 Cycles							
	Mating		Unmating					
	Newton	Force (Lbs)	Newton	Force (Lbs)				
Minimum	5.96	1.34	4.85	1.09				
Maximum	9.47	2.13	9.07	2.04				
<b>Average</b>	7.88	<b>1.77</b>	7.29	<b>1.64</b>				
St Dev	1.10	0.25	1.37	0.31				
Count	8	8	8	8				


**DATA SUMMARIES Continued****MATING-UNMATING FORCE:****Mating-Unmating Basic (MB1-150-01-L-S-02-SL/EDGE CARD 0.068")**

	Initial				After 25 Cycles			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	11.34	2.55	8.81	1.98	13.43	3.02	11.43	2.57
Maximum	14.72	3.31	10.54	2.37	16.72	3.76	15.21	3.42
<b>Average</b>	12.93	<b>2.91</b>	9.61	<b>2.16</b>	15.42	<b>3.47</b>	13.21	<b>2.97</b>
St Dev	1.05	0.24	0.67	0.15	1.11	0.25	1.31	0.29
Count	8	8	8	8	8	8	8	8
	After 50 Cycles				After 75 Cycles			
	Mating		Unmating		Mating		Unmating	
	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)	Newton	Force (Lbs)
Minimum	14.63	3.29	13.17	2.96	15.52	3.49	14.14	3.18
Maximum	17.93	4.03	16.99	3.82	18.15	4.08	18.15	4.08
<b>Average</b>	16.32	<b>3.67</b>	14.92	<b>3.36</b>	16.58	<b>3.73</b>	16.06	<b>3.61</b>
St Dev	0.94	0.21	1.28	0.29	0.98	0.22	1.47	0.33
Count	8	8	8	8	8	8	8	8
	After 100 Cycles							
	Mating		Unmating					
	Newton	Force (Lbs)	Newton	Force (Lbs)				
Minimum	13.97	3.14	15.43	3.47				
Maximum	18.68	4.20	18.90	4.25				
<b>Average</b>	16.68	<b>3.75</b>	16.90	<b>3.80</b>				
St Dev	1.44	0.32	1.23	0.28				
Count	8	8	8	8				

### DATA SUMMARIES Continued

#### Mating\Unmating Force Comparison

Mating/Unmating Data for 20, 30 and 50 Position MB1/Card

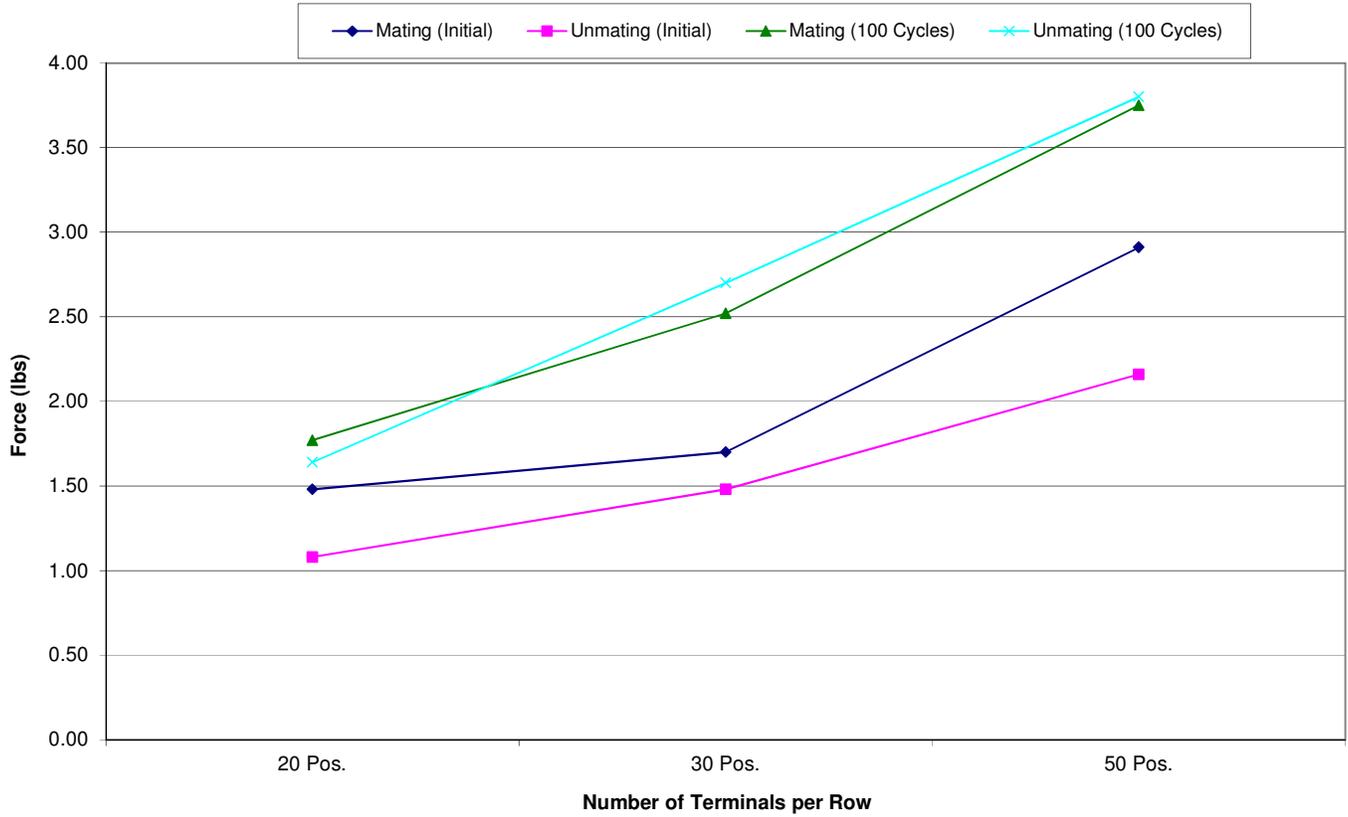


**DATA SUMMARIES Continued**

**NORMAL FORCE (FOR CONTACTS TESTED IN THE HOUSING):**

- 1) Calibrated force gauges are used along with computer controlled positioning equipment.
- 2) For Normal force 8-10 measurements are taken and the averages reported.

Initial	Deflections in inches Forces in Grams										
	<u>0.0027</u>	<u>0.0055</u>	<u>0.0082</u>	<u>0.0110</u>	<u>0.0137</u>	<u>0.0164</u>	<u>0.0192</u>	<u>0.0219</u>	<u>0.0247</u>	<u>0.0274</u>	<i>SET</i>
<b>Averages</b>	7.03	13.68	19.91	26.13	33.88	41.28	48.63	56.01	62.64	69.59	0.0002
<b>Min</b>	6.30	12.40	18.40	24.40	30.50	37.10	44.80	52.70	59.40	66.70	0.0000
<b>Max</b>	7.40	14.70	21.70	27.50	35.50	44.50	51.40	58.10	65.00	72.00	0.0003
<b>St. Dev</b>	0.323	0.723	0.948	1.097	1.402	1.799	1.632	1.625	1.577	1.593	0.0001
<b>Count</b>	12	12	12	12	12	12	12	12	12	12	12

After Thermals	Deflections in inches Forces in Grams										
	<u>0.0027</u>	<u>0.0055</u>	<u>0.0082</u>	<u>0.0110</u>	<u>0.0137</u>	<u>0.0164</u>	<u>0.0192</u>	<u>0.0219</u>	<u>0.0247</u>	<u>0.0274</u>	<i>SET</i>
<b>Averages</b>	-0.06	2.83	9.58	15.93	22.07	28.68	36.70	44.39	51.06	58.43	0.0045
<b>Min</b>	-0.50	-0.10	4.30	10.80	16.70	23.00	30.70	37.80	45.00	52.00	0.0036
<b>Max</b>	0.30	4.60	11.30	18.80	23.80	32.20	40.90	47.90	55.00	63.40	0.0067
<b>St. Dev</b>	0.227	1.473	1.842	1.907	1.845	2.248	2.539	2.461	2.389	2.800	0.0008
<b>Count</b>	12	12	12	12	12	12	12	12	12	12	12

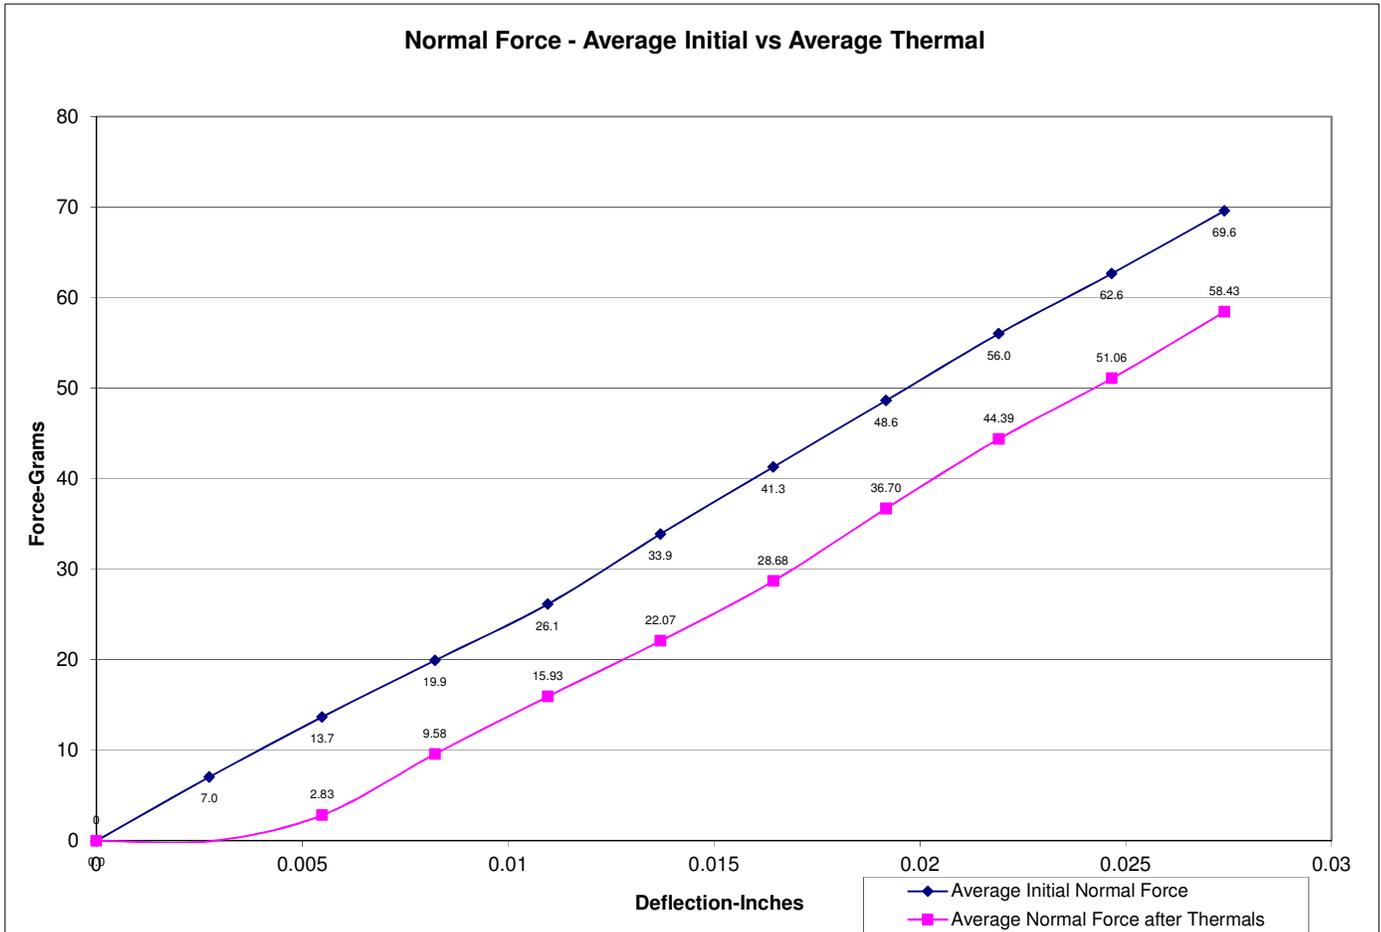

**DATA SUMMARIES Continued****INSULATION RESISTANCE (IR):**

Minimum	Pin to Pin		
	Mated	Unmated	Unmated
	<b>MB1/CARD</b>	<b>MB1</b>	<b>CARD</b>
<b>Initial</b>	10000	10000	Not Tested
<b>Thermal</b>	10000	10000	Not Tested
<b>Humidity</b>	10000	10000	Not Tested

**DIELECTRIC WITHSTANDING VOLTAGE (DWV):**

Voltage Rating Summary	
Minimum	MB1/CARD
<b>Break Down Voltage</b>	1000
<b>Test Voltage</b>	750
<b>Working Voltage</b>	250

Pin to Pin	
<b>Initial Test Voltage</b>	Passed
<b>After Thermal Test Voltage</b>	Passed
<b>After Humidity Test Voltage</b>	Passed

**DATA SUMMARIES Continued****LLCR Thermal Aging Group**

- 1) A total of 192 points were measured.
- 2) EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3) A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4) The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms:----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms:----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms:----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms:----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms ----- Unstable
  - f.  $>+2000$  mOhms:----- Open Failure

**MB1-130-01-L-S-02-SL/EDGE CARD 0.056"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/3/12	2014/3/26		
Room Temp (Deg C)	22	21		
Rel Humidity (%)	54	53		
Technician	Kason He	Kason He		
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta Thermal</b>	<b>Delta</b>	<b>Delta</b>
<b>Pin Type 1: Signal</b>				
Average	19.51	2.64		
St. Dev.	1.40	2.49		
Min	16.07	0.00		
Max	22.90	11.28		
Summary Count	192	192		
Total Count	192	192		

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	$\leq 5$	$>5 \ \& \ \leq 10$	$>10 \ \& \ \leq 15$	$>15 \ \& \ \leq 50$	$>50 \ \& \ \leq 1000$	$>1000$
<b>Thermal</b>	165	24	3	0	0	0

**MB1-130-01-L-S-02-SL/EDGE CARD 0.068"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/3/12	2014/3/26		
Room Temp (Deg C)	22	21		
Rel Humidity (%)	54	51		
Technician	Kason He	Kason He		
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta Thermal</b>	<b>Delta</b>	<b>Delta</b>
<b>Pin Type 1: Signal</b>				
Average	17.30	1.85		
St. Dev.	1.28	1.61		
Min	15.24	0.03		
Max	21.47	8.70		
Summary Count	192	192		
Total Count	192	192		

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	<=5	>5 & <=10	>10 & <=15	>15 & <=50	>50 & <=1000	>1000
<b>Thermal</b>	182	10	0	0	0	0

**DATA SUMMARIES Continued****LLCR Mating/Unmating Durability Group**

- 1). A total of 192 points were measured.
- 2). EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3). A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4). The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms: ----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms: ----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms: ----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms: ----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms ----- Unstable
  - f.  $> +2000$  mOhms: ----- Open Failure

**MB1-130-01-L-S-02-SL/EDGE CARD 0.056"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/3/13	2014/3/19	2014/3/25	2014/4/11
Room Temp (Deg C)	22	21	21	21
Rel Humidity (%)	52	57	51	56
Technician	Kason He	Kason He	Kason He	Kason He
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 100 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	19.95	2.13	3.34	2.26
St. Dev.	1.80	1.67	2.02	1.79
Min	16.25	0.00	0.07	0.02
Max	24.71	7.86	9.25	7.97
Summary Count	192	192	192	192
Total Count	192	192	192	192

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	$\leq 5$	$>5 \ \& \ \leq 10$	$>10 \ \& \ \leq 15$	$>15 \ \& \ \leq 50$	$>50 \ \& \ \leq 1000$	$>1000$
<b>100 Cycles</b>	181	11	0	0	0	0
<b>Therm Shck</b>	161	31	0	0	0	0
<b>Humidity</b>	175	17	0	0	0	0

**MB1-130-01-L-S-02-SL/EDGE CARD 0.068"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/3/13	2014/3/19	2014/3/25	2014/4/11
Room Temp (Deg C)	22	21	21	21
Rel Humidity (%)	54	57	53	56
Technician	Kason He	Kason He	Kason He	Kason He
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 100 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	19.09	1.95	3.71	2.91
St. Dev.	1.49	1.41	1.61	1.74
Min	15.65	0.00	0.10	0.02
Max	23.30	5.87	8.54	8.54
Summary Count	192	192	192	192
Total Count	192	192	192	192

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	<b>&lt;=5</b>	<b>&gt;5 &amp; &lt;=10</b>	<b>&gt;10 &amp; &lt;=15</b>	<b>&gt;15 &amp; &lt;=50</b>	<b>&gt;50 &amp; &lt;=1000</b>	<b>&gt;1000</b>
<b>100 Cycles</b>	186	6	0	0	0	0
<b>Therm Shck</b>	152	40	0	0	0	0
<b>Humidity</b>	170	22	0	0	0	0

**DATA SUMMARIES Continued****LLCR Gas Tight Group**

- 1) A total of 192 points were measured.
- 2) EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3) A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4) The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms: ----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms:----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms: ----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms: ----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms: ----- Unstable
  - f.  $>+2000$  mOhms:----- Open Failure

**MB1-130-01-L-S-02-SL/EDGE CARD 0.056"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/3/19	2014/4/30		
Room Temp (Deg C)	21	22		
Rel Humidity (%)	57	54		
Technician	Kason He	Kason He		
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta Acid Vapor</b>	<b>Delta</b>	<b>Delta</b>
<b>Pin Type 1: Signal</b>				
Average	20.04	1.68		
St. Dev.	1.69	1.36		
Min	16.50	0.01		
Max	24.02	6.92		
Summary Count	192	192		
Total Count	192	192		

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	$\leq 5$	$>5 \ \& \ \leq 10$	$>10 \ \& \ \leq 15$	$>15 \ \& \ \leq 50$	$>50 \ \& \ \leq 1000$	$>1000$
<b>Acid Vapor</b>	<b>188</b>	<b>4</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

**DATA SUMMARIES Continued****LLCR Shock & Vibration Group**

- 1) A total of 192 points were measured.
- 2) EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3) A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4) The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms:----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms:----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms:----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms:----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms ----- Unstable
  - f.  $>+2000$  mOhms:----- Open Failure

**MB1-130-01-L-S-02-SL/EDGE CARD 0.056"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/4/18	2014/4/22		
Room Temp (Deg C)	22	22		
Rel Humidity (%)	31	37		
Technician	Tony Wagoner	Tony Wagoner		
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta Shock-Vib</b>	<b>Delta</b>	<b>Delta</b>
<b>Pin Type 1: Signal</b>				
Average	20.21	1.76		
St. Dev.	1.90	1.10		
Min	16.05	0.04		
Max	27.85	6.69		
Summary Count	192	192		
Total Count	192	192		

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	<b><math>\leq 5</math></b>	<b><math>&gt;5</math> &amp; <math>\leq 10</math></b>	<b><math>&gt;10</math> &amp; <math>\leq 15</math></b>	<b><math>&gt;15</math> &amp; <math>\leq 50</math></b>	<b><math>&gt;50</math> &amp; <math>\leq 1000</math></b>	<b><math>&gt;1000</math></b>
<b>Shock-Vib</b>	<b>189</b>	<b>3</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

**Nanosecond Event Detection:**

<b>Shock and Vibration Event Detection Summary</b>	
Contacts tested	60
Test Condition	C, 100g's, 6ms, Half-Sine
Shock Events	0
Test Condition	V-B, 7.56 rms g
Vibration Events	0
<b>Total Events</b>	<b>0</b>

**MB1-130-01-L-S-02-SL/EDGE CARD 0.068"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/4/17	2014/4/21		
Room Temp (Deg C)	22	23		
Rel Humidity (%)	34	30		
Technician	Tony Wagoner	Tony Wagoner		
<b>mOhm values</b>	<b>Actual</b>	<b>Delta</b>	<b>Delta</b>	<b>Delta</b>
	<b>Initial</b>	<b>Shock-Vib</b>		
<b>Pin Type 1: Signal</b>				
Average	17.83	1.66		
St. Dev.	1.25	1.10		
Min	15.47	0.01		
Max	21.26	5.12		
Summary Count	192	192		
Total Count	192	192		

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	<b>&lt;=5</b>	<b>&gt;5 &amp; &lt;=10</b>	<b>&gt;10 &amp; &lt;=15</b>	<b>&gt;15 &amp; &lt;=50</b>	<b>&gt;50 &amp; &lt;=1000</b>	<b>&gt;1000</b>
<b>Shock-Vib</b>	<b>190</b>	<b>2</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

**DATA SUMMARIES Continued****LLCR Mating/Unmating Durability 250 Cycles Group**

- 1). A total of 192 points were measured.
- 2). EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3). A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4). The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms: ----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms: ----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms: ----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms: ----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms ----- Unstable
  - f.  $> +2000$  mOhms: ----- Open Failure

**MB1-130-01-S-S-02-SL/EDGE CARD 0.056"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/4/21	2014/4/25	2014/5/6	2014/5/20
Room Temp (Deg C)	21	21	20	23
Rel Humidity (%)	54	58	58	55
Technician	Kason He	Kason He	Kason He	Kason He
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 250 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	19.66	1.80	2.25	1.73
St. Dev.	1.54	1.54	1.49	1.44
Min	15.98	0.00	0.00	0.01
Max	23.38	6.48	6.77	7.46
Summary Count	192	192	192	192
Total Count	192	192	192	192

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	$\leq 5$	$>5 \ \& \ \leq 10$	$>10 \ \& \ \leq 15$	$>15 \ \& \ \leq 50$	$>50 \ \& \ \leq 1000$	$>1000$
<b>250 Cycles</b>	182	10	0	0	0	0
<b>Therm Shck</b>	179	13	0	0	0	0
<b>Humidity</b>	184	8	0	0	0	0

**DATA SUMMARIES Continued****LLCR Mating/Unmating Durability 500 Cycles Group**

- 1). A total of 192 points were measured.
- 2). EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3). A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4). The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms: ----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms: ----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms: ----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms: ----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms ----- Unstable
  - f.  $> +2000$  mOhms: ----- Open Failure

**MB1-130-01-S-S-02-SL/EDGE CARD 0.056"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/4/22	2014/4/28	2014/5/6	2014/5/20
Room Temp (Deg C)	21	21	20	23
Rel Humidity (%)	54	53	60	55
Technician	Kason He	Kason He	Kason He	Kason He
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 500 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	19.08	1.32	1.98	1.55
St. Dev.	1.56	1.12	1.15	1.18
Min	15.61	0.02	0.01	0.01
Max	23.07	5.87	6.03	5.54
Summary Count	192	192	192	192
Total Count	192	192	192	192

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	$\leq 5$	$>5 \ \& \ \leq 10$	$>10 \ \& \ \leq 15$	$>15 \ \& \ \leq 50$	$>50 \ \& \ \leq 1000$	$>1000$
<b>500 Cycles</b>	189	3	0	0	0	0
<b>Therm Shck</b>	187	5	0	0	0	0
<b>Humidity</b>	188	4	0	0	0	0

**DATA SUMMARIES Continued****LLCR Mating/Unmating Durability 1000 Cycles Group**

- 1). A total of 192 points were measured.
- 2). EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3). A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4). The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms: ----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms: ----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms: ----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms: ----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms ----- Unstable
  - f.  $> +2000$  mOhms: ----- Open Failure

**MB1-130-01-S-S-02-SL/EDGE CARD 0.056"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/4/23	2014/4/28	2014/5/6	2014/5/20
Room Temp (Deg C)	21	21	22	23
Rel Humidity (%)	49	53	58	55
Technician	Kason He	Kason He	Kason He	Kason He
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 1000 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	19.16	1.38	1.88	1.80
St. Dev.	1.45	1.15	1.27	1.28
Min	15.76	0.01	0.02	0.01
Max	23.30	5.73	6.16	5.93
Summary Count	192	192	192	192
Total Count	192	192	192	192

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	$\leq 5$	$>5 \ \& \ \leq 10$	$>10 \ \& \ \leq 15$	$>15 \ \& \ \leq 50$	$>50 \ \& \ \leq 1000$	$>1000$
<b>1000 Cycles</b>	189	3	0	0	0	0
<b>Therm Shck</b>	188	4	0	0	0	0
<b>Humidity</b>	188	4	0	0	0	0

**DATA SUMMARIES Continued****LLCR Mating/Unmating Durability 2500 Cycles Group**

- 1). A total of 192 points were measured.
- 2). EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3). A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4). The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms: ----- Stable
  - b.  $+5.1$  to  $+10.0$  mOhms: ----- Minor
  - c.  $+10.1$  to  $+15.0$  mOhms: ----- Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms: ----- Marginal
  - e.  $+50.1$  to  $+2000$  mOhms ----- Unstable
  - f.  $> +2000$  mOhms: ----- Open Failure

**MB1-130-01-S-S-02-SL/EDGE CARD 0.056"**

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2014/4/28	2014/5/5	2014/5/12	2014/5/28
Room Temp (Deg C)	21	22	22	25
Rel Humidity (%)	53	59	56	56
Technician	Kason He	Kason He	Kason He	Kason He
<b>mOhm values</b>	<b>Actual Initial</b>	<b>Delta 2500 Cycles</b>	<b>Delta Therm Shck</b>	<b>Delta Humidity</b>
<b>Pin Type 1: Signal</b>				
Average	19.74	1.48	1.44	1.71
St. Dev.	1.50	1.06	1.33	1.70
Min	15.83	0.02	0.01	0.00
Max	23.52	4.69	10.42	9.94
Summary Count	192	192	192	192
Total Count	192	192	192	192

<b>LLCR Delta Count by Category</b>						
	<b>Stable</b>	<b>Minor</b>	<b>Acceptable</b>	<b>Marginal</b>	<b>Unstable</b>	<b>Open</b>
<b>mOhms</b>	$\leq 5$	$>5 \ \& \ \leq 10$	$>10 \ \& \ \leq 15$	$>15 \ \& \ \leq 50$	$>50 \ \& \ \leq 1000$	$>1000$
<b>2500 Cycles</b>	192	0	0	0	0	0
<b>Therm Shck</b>	189	2	1	0	0	0
<b>Humidity</b>	180	12	0	0	0	0

**EQUIPMENT AND CALIBRATION SCHEDULES****Equipment #:** HZ-TCT-01**Description:** Normal force analyzer**Manufacturer:** Mecmesin Multitester**Model:** Mecmesin Multitester 2.5-i**Serial #:** 08-1049-04**Accuracy:** Last Cal: 4/25/2014, Next Cal: 4/24/2015**Equipment #:** HZ-OV-01**Description:** Oven**Manufacturer:** Huida**Model:** CS101-1E**Serial #:** CS101-1E-B**Accuracy:** Last Cal: 12/12/2013, Next Cal: 12/11/2014**Equipment #:** HZ-THC-01**Description:** Humidity transmitter**Manufacturer:** Thermtron**Model:** SM-8-8200**Serial #:** 38846**Accuracy:** Last Cal: 2/27/2014, Next Cal: 2/26/2015**Equipment #:** HZ-HPM-01**Description:** NA9636H**Manufacturer:** Ainuo**Model:** 6031A**Serial #:** 089601091**Accuracy:** Last Cal: 3/6/2014, Next Cal: 3/5/2015**Equipment #:** HZ-MO-05**Description:** Micro-ohmmeter**Manufacturer:** Keithley**Model:** 3706**Serial #:** 1285188**Accuracy:** Last Cal: 11/14/2013, Next Cal: 11/13/2014**Equipment #:** HZ-TSC-01**Description:** Vertical Thermal Shock Chamber**Manufacturer:** Cincinnatti Sub Zero**Model:** VTS-3-6-6-SC/AC**Serial #:** 10-VT14994**Accuracy:** See Manual

... Last Cal: 06/27/2013, Next Cal: 06/26/2014

**Equipment #:** HZ-PS-01**Description:** 120 Amp Power Supply**Manufacturer:** Agilent**Model:** 6031A PS**Serial #:** MY41000982**Accuracy:** See Manual

... Last Cal: 07/02/2013, Next Cal: 07/01/2014

**EQUIPMENT AND CALIBRATION SCHEDULES Continued****Equipment #:** HZ-MO-01**Description:** Multimeter /Data Acquisition System**Manufacturer:** Keithley**Model:** 2700**Serial #:** 1199807**Accuracy:** See Manual

... Last Cal: 07/02/2013, Next Cal: 07/01/2014

**Equipment #:** MO-11**Description:** Switch/Multimeter**Manufacturer:** Keithley**Model:** 3706**Serial #:** 120169**Accuracy:** See Manual

... Last Cal: 08/21/2013, Next Cal: 08/21/2014

**Equipment #:** SVC-01**Description:** Shock & Vibration Table**Manufacturer:** Data Physics**Model:** LE-DSA-10-20K**Serial #:** 10037**Accuracy:** See Manual

... Last Cal: 11/31/2013, Next Cal: 11/31/2014

**Equipment #:** ACLM-01**Description:** Accelerometer**Manufacturer:** PCB Piezotronics**Model:** 352C03**Serial #:** 115819**Accuracy:** See Manual

... Last Cal: 07/09/2013, Next Cal: 07/09/2014

**Equipment #:** ED-03**Description:** Event Detector**Manufacturer:** Analysis Tech**Model:** 32EHD**Serial #:** 1100604**Accuracy:** See Manual

... Last Cal: 06/04/2013, Next Cal: 06/04/2014