




Project Number: Design Qualification Test Report	Tracking Code: CR-1081202_Report_Rev_1
Requested by: Mark Shireman	Date: 6/3/2024
Part #: MPT-08-6.30-03-L-V\MPS-08-7.70-03-L-V	
Part description: MPT\MPS	Tech: Brian Stemle
Test Start: 5/10/2024	Test Completed: 5/10/2024

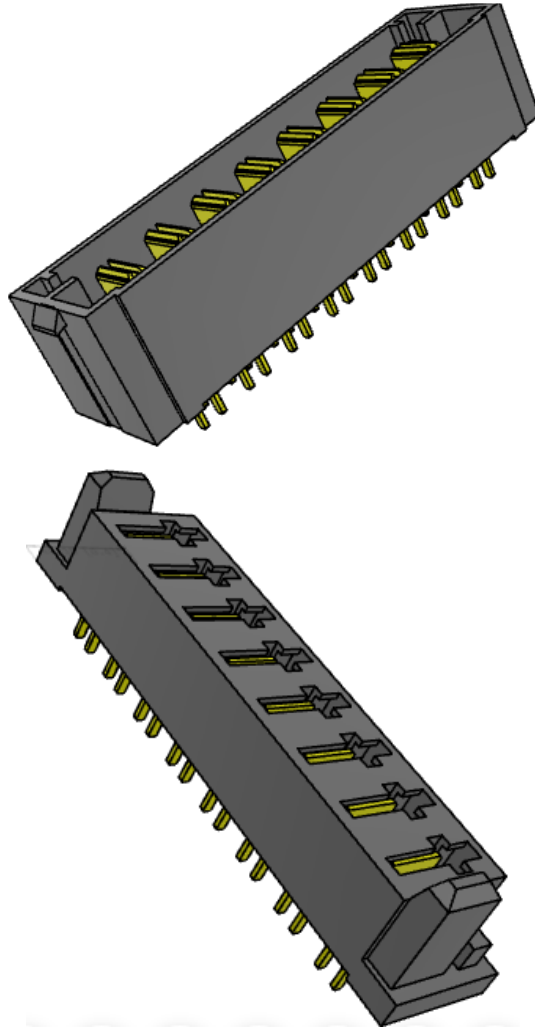

**DESIGN QUALIFICATION TEST REPORT**  
**MPT\MPS**  
**MPT-08-6.30-03-L-V\MPS-08-7.70-03-L-V**

Tracking Code: CR-1081202_Report_Rev_1	Part #: MPT-08-6.30-03-L-V\MPS-08-7.70-03-L-V
Part description: MPT\MPS	

**REVISION HISTORY**

<b>DATA</b>	<b>REV.NUM.</b>	<b>DESCRIPTION</b>	<b>ENG</b>
6/3/2024	1	Initial Issue	KH

## **CERTIFICATION**

All instruments and measuring equipment were calibrated to National Institute for Standards and Technology (NIST) traceable standards according to ISO 10012-1 and ANSI/NCSL 2540-1, as applicable.

All contents contained herein are the property of Samtec. No portion of this report, in part or in full shall be reproduced without prior written approval of Samtec.

### **SCOPE**

To perform the following tests: Design Qualification test. Please see test plan.

### **APPLICABLE DOCUMENTS**

Standards: EIA Publication 364.

### **TEST SAMPLES AND PREPARATION**

- 1) All materials were manufactured in accordance with the applicable product specification.
- 2) All test samples were identified and encoded to maintain traceability throughout the test sequences.
- 3) Any additional preparation will be noted in the individual test sequences.

**FLOWCHARTS**

**Pull/Shear**

Group 1  
 MPT-08-6.30-03-L-V  
 MPS-08-7.70-03-L-V  
 5 Assemblies

Group 2  
 MPT-08-6.30-03-L-V  
 MPS-08-7.70-03-L-V  
 5 Assemblies

---

Step	Description
1.	Connector Pull

---

Step	Description
1.	Connector Shear




## ATTRIBUTE DEFINITIONS

The following is a brief, simplified description of attributes.

### Connector Pull & Shear Force:

1. Attempted to shear the connector off the board upwards on the Z axis.

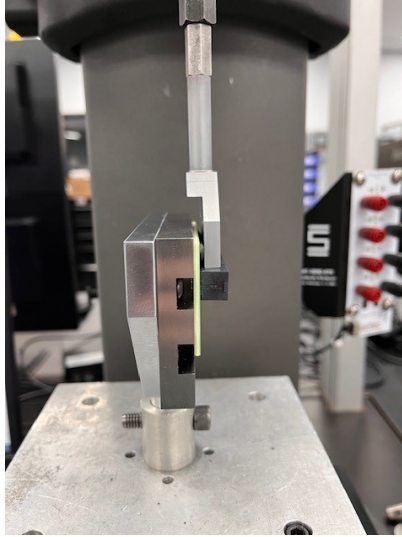

(Setup Picture 1)

2. Attempted to pull the connector off the board downward on the Z axis.



(Setup Picture 2)

**RESULTS**

**Connector Pull & Shear Force:**

**MPT-08-6.30-03-L-V**

**Connector Pull force:**

- **Min** ----- 103.00 lbs
- **Max** ----- 115.00 lbs

**Connector Shear force:**

- **Min** ----- 415.00 lbs
- **Max** ----- 415.00 lbs

**Note: Maximum allowable load has been reached.**

**MPS-08-7.70-03-L-V**

**Connector Pull force:**

- **Min** ----- 84.00 lbs
- **Max** ----- 142.00 lbs

**Connector Shear force:**

- **Min** ----- 415.00 lbs
- **Max** ----- 415.00 lbs

**Note: Maximum allowable load has been reached.**

**DATA SUMMARIES**

**Connector Pull & Shear Force:  
MPT-08-6.30-03-L-V**

**Connector Pull**

	Force (lbs)
Minimum	103.00
Maximum	115.00
Average	108.60

**Connector Shear**

	Force (lbs)
Minimum	415.00
Maximum	415.00
Average	415.00

**Note: Maximum allowable load has been reached.**

**MPS-08-7.70-03-L-V**

**Connector Pull**

	Force (lbs)
Minimum	84.00
Maximum	142.00
Average	118.40

**Connector Shear**

	Force (lbs)
Minimum	415.00
Maximum	415.00
Average	415.00

**Note: Maximum allowable load has been reached.**

Tracking Code: CR-1081202_Report_Rev_1	Part #: MPT-08-6.30-03-L-V\MPS-08-7.70-03-L-V
Part description: MPT\MPS	

### EQUIPMENT AND CALIBRATION SCHEDULES

**Equipment #:** TCT-11

**Description:** Dillon Quantrol TC21 25-1000 mm/min series test stand

**Manufacturer:** Dillon Quantrol

**Model:** TC2 I series test stand

**Serial #:** 04-1041-04

**Accuracy:** Speed Accuracy: +/- 5% of indicated speed; Speed Accuracy: +/- 5% of indicated speed;  
... Last Cal: 05/29/2023, Next Cal: 05/29/2024