

Series: QFS/QMS

Description: Micro High Speed Board-to-Board, 0.635mm Pitch, 10mm (0.3935") Stack Height

Frequency Domain Data Summary

Table 1 - Single-Ended Connector System Performance		
Test Parameter	Configuration	
Insertion Loss	GSG	3dB@ 7.8GHz
Return Loss	GSG	>10dB to 6GHz
Near-End Crosstalk	GAQG	<-20dB to 0.5GHz
	GAGQG	<-20dB to 7.7GHz
	Xrow, GAG to GQG	<-20dB to 20GHz
Far-End Crosstalk	GAQG	<-20dB to 9.7GHz
	GAGQG	<-20dB to 7.7GHz
	Xrow, GAG to GQG	<-20dB to 20GHz

Table 2 - Differential Connector System Performance		
Test Parameter	Configuration	
Insertion Loss	GSSG	3dB@ 8.4GHz
Return Loss	GSSG	>10dB to 1.7GHz
Near-End Crosstalk	GAAQQG	<-20dB to 18.1GHz
	GAAGQQG	<-20dB to 20GHz
	Xrow, GAAG to GQQG	<-20dB to 20GHz
Far-End Crosstalk	GAAQQG	<-20dB to 20GHz
	GAAGQQG	<-20dB to 20GHz
	Xrow, GAAG to GQQG	<-20dB to 20GHz


Series: QFS/QMS

Description: Micro High Speed Board-to-Board, 0.635mm Pitch, 10mm (0.3935") Stack Height

Bandwidth Chart – Single-Ended & Differential Insertion Loss

QFS/QMS Connector Series

Single-Ended Application - Insertion Loss

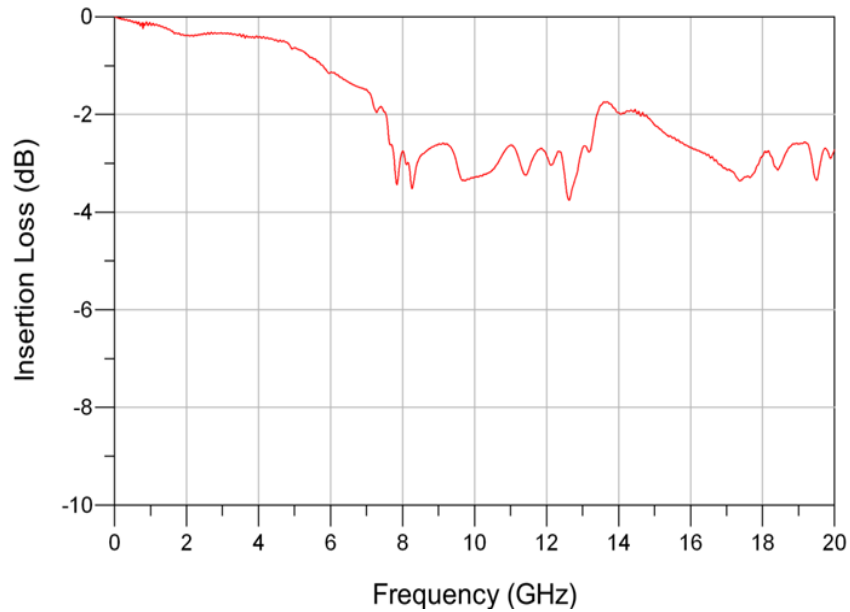

Differential Application - Insertion Loss

