


**Series:** SEAFP/SEAM Array Series

**Description:** 1.27mm x 1.27mm grid interconnect system, 12 mm Stack Height

## Frequency Domain Data Summary

Table 1 - Single-Ended 1:1 S/G Pattern Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAM_C16	SEAFP_C16	3dB@ 15.2 GHz
Return Loss	SEAM_C16	SEAM_C16	>10dB to 5 GHz
Near-End Crosstalk	SEAM_A18	SEAM_C18	<-20dB to 20 GHz
	SEAM_C16	SEAM_C18	<-20dB to 16.26 GHz
	SEAM_C16	SEAM_D15	<-20dB to 18.15 GHz
Far-End Crosstalk	SEAM_A18	SEAFP_C18	<-20dB to 20 GHz
	SEAM_C16	SEAFP_C18	<-20dB to 16.19 GHz
	SEAM_C16	SEAFP_D15	<-20dB to 16.29 GHz

### Single-Ended 1:1 S/G Pattern Pin Map

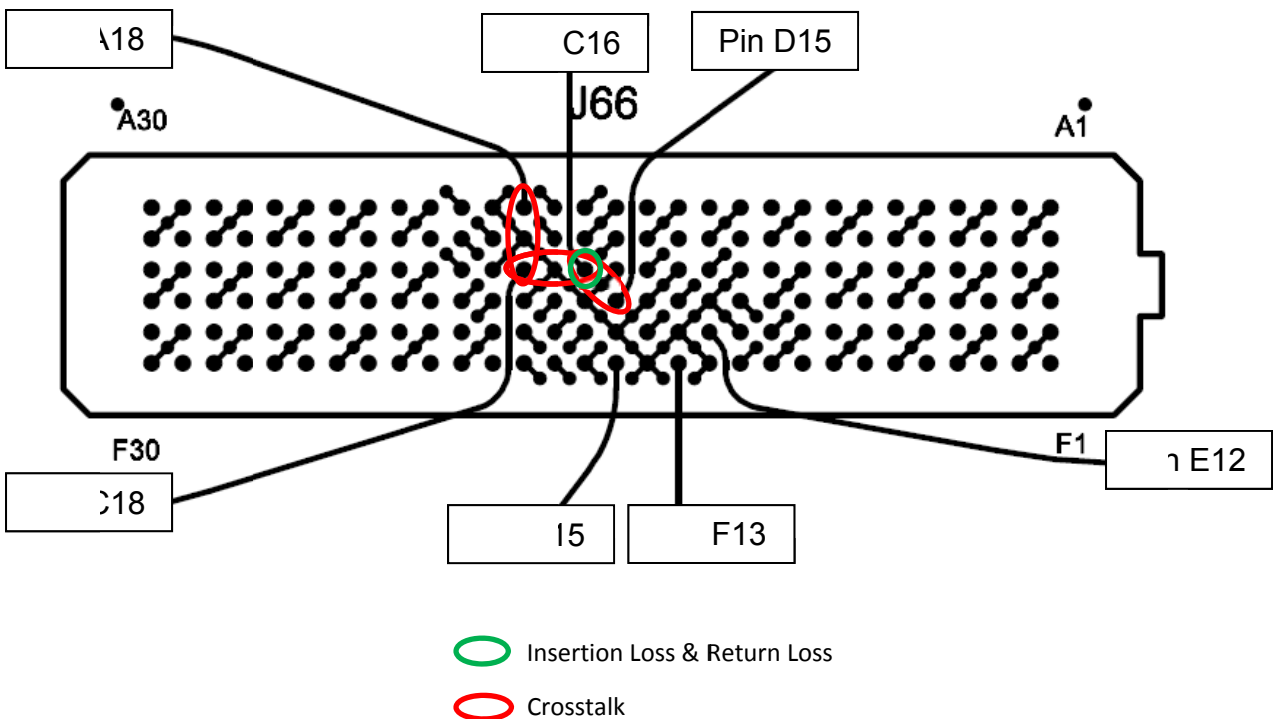


**Series:** SEAFP/SEAM Array Series

**Description:** 1.27mm x 1.27mm grid interconnect system, 12 mm Stack Height

Table 2 - Single-Ended 2:1 S/G Pattern Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAM_E10	SEAFP_E10	3dB@ 13.81 GHz
Return Loss	SEAM_E10	SEAM_E10	>10dB to 5.53 GHz
Near-End Crosstalk	SEAM_E10	SEAM_F10	<-20dB to 1.39 GHz
	SEAM_E10	SEAM_F11	<-20dB to 18.26 GHz
	SEAM_F10	SEAM_F11	<-20dB to 0.66 GHz
Far-End Crosstalk	SEAM_E10	SEAFP_F10	<-20dB to 17.43 GHz
	SEAM_E10	SEAFP_F11	<-20dB to 20 GHz
	SEAM_F10	SEAFP_F11	<-20dB to 7.85 GHz

### Single-Ended 2:1 S/G Pattern Pin Map

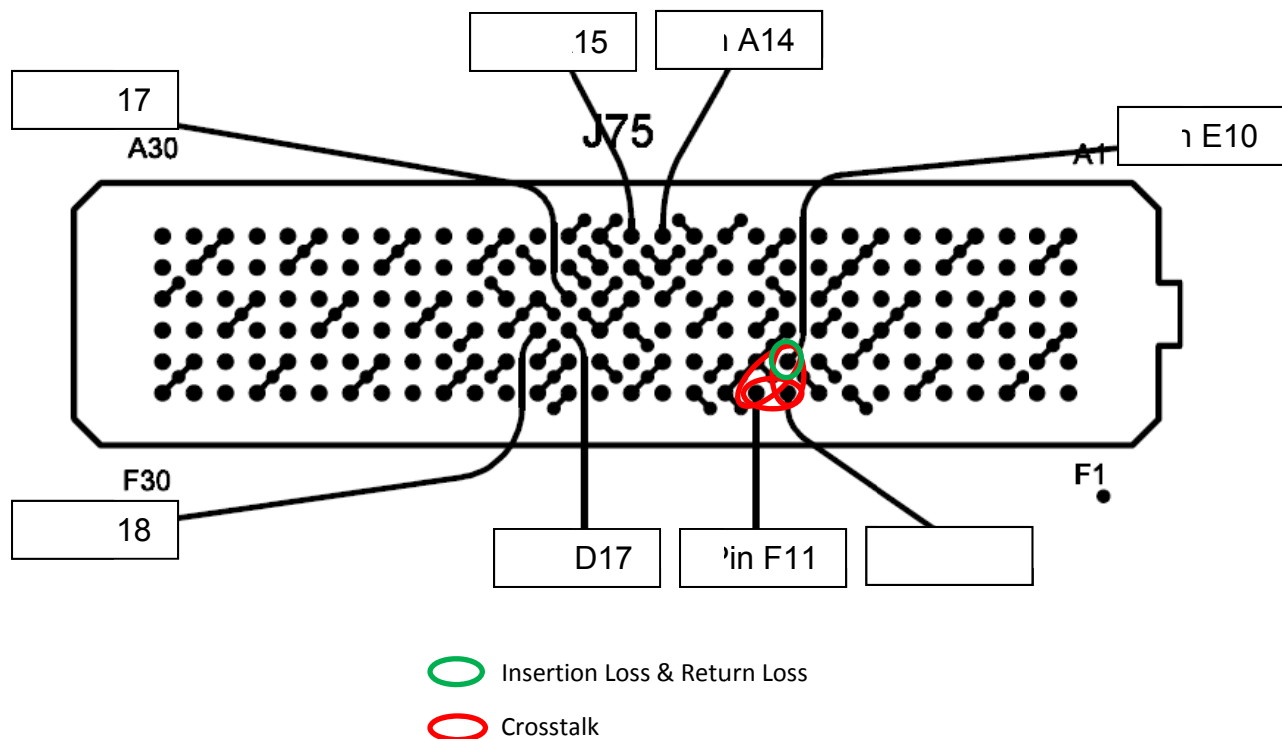


**Series:** SEAFP/SEAM Array Series

**Description:** 1.27mm x 1.27mm grid interconnect system, 12 mm Stack Height

Table 3 - Differential Optimal Horizontal Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAM_D17,D18	SEAFP_D17,D18	3dB@ 14.96 GHz
Return Loss	SEAM_D17,D18	SEAM_D17,D18	>10dB to 6.64 GHz
Near-End Crosstalk	SEAM_A15,A16	SEAM_C15,C16	<-20dB to 20.0 GHz
	SEAM_C15,C16	SEAM_D17,D18	<-20dB to 20.0 GHz
	SEAM_D17,D18	SEAM_D21,D22	<-20dB to 20.0 GHz
Far-End Crosstalk	SEAM_A15,A16	SEAFP_C15,C16	<-20dB to 20.0 GHz
	SEAM_C15,C16	SEAFP_D17,D18	<-20dB to 20.0 GHz
	SEAM_D17,D18	SEAFP_D21,D22	<-20dB to 20.0 GHz

### Differential Optimal Horizontal Pin Map

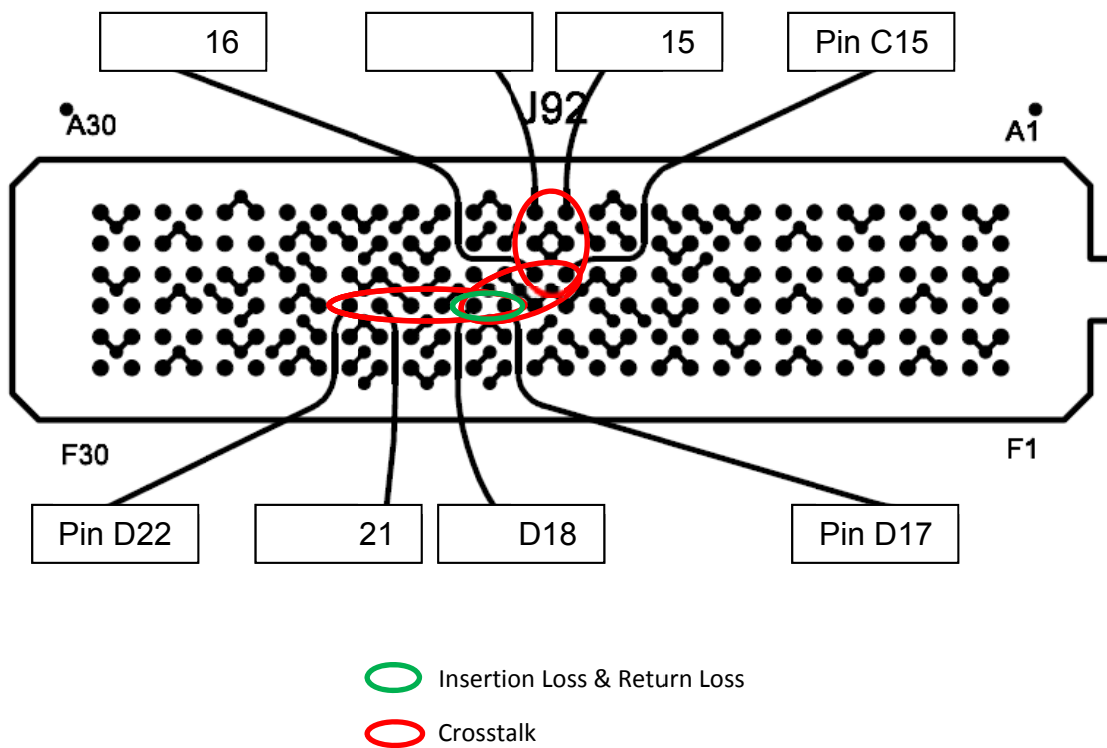


**Series:** SEAFP/SEAM Array Series

**Description:** 1.27mm x 1.27mm grid interconnect system, 12 mm Stack Height

Table 4 - Differential Optimal Vertical Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAM_C19,D19	SEAFP_C19,D19	3dB@ 13.7 GHz
Return Loss	SEAM_C19,D19	SEAM_C19,D19	>10dB to 6.46 GHz
Near-End Crosstalk	SEAM_A16,B16	SEAM_E16,F16	<-20dB to 20.0 GHz
	SEAM_C19,D19	SEAM_E18,F18	<-20dB to 20.0 GHz
	SEAM_E16,F16	SEAM_E18,F18	<-20dB to 20.0 GHz
Far-End Crosstalk	SEAM_A16,B16	SEAFP_E16,F16	<-20dB to 20.0 GHz
	SEAM_C19,D19	SEAFP_E18,F18	<-20dB to 20.0 GHz
	SEAM_E16,F16	SEAFP_E18,F18	<-20dB to 16.74 GHz

### Differential Optimal Vertical Pin Map

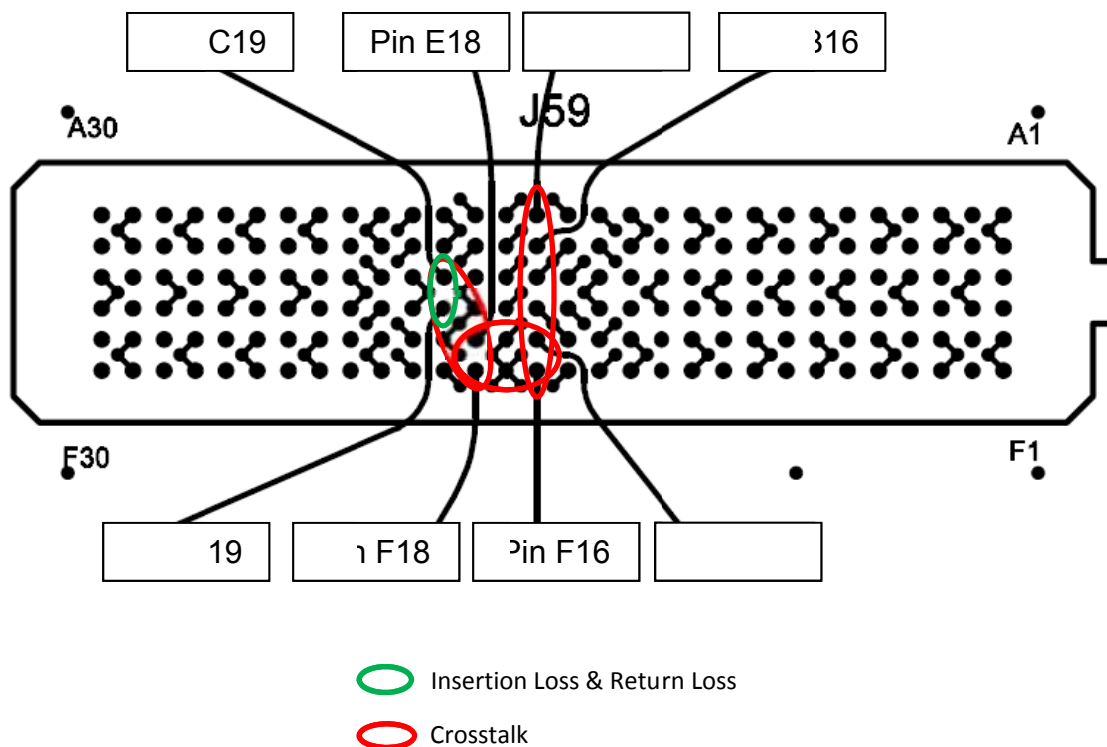


**Series:** SEAFP/SEAM Array Series

**Description:** 1.27mm x 1.27mm grid interconnect system, 12 mm Stack Height

Table 5 - Differential High Density Vertical Performance			
Test Parameter	Driver	Receiver	
Insertion Loss	SEAM_D18,E18	SEAFP_D18,E18	3dB@ 14 GHz
Return Loss	SEAM_D18,E18	SEAM_D18,E18	>10dB to 6.61 GHz
Near-End Crosstalk	SEAM_B15,C15	SEAM_B17,C17	<-20dB to 20.0 GHz
	SEAM_B17,C17	SEAM_D18,E18	<-20dB to 20.0 GHz
	SEAM_D18,E18	SEAM_E17,F17	<-20dB to 12.41 GHz
Far-End Crosstalk	SEAM_B15,C15	SEAM_B17,C17	<-20dB to 20.0 GHz
	SEAM_B17,C17	SEAM_D18,E18	<-20dB to 20.0 GHz
	SEAM_D18,E18	SEAFP_E17,F17	<-20dB to 18.75 GHz

### Differential High Density Vertical Pin Map

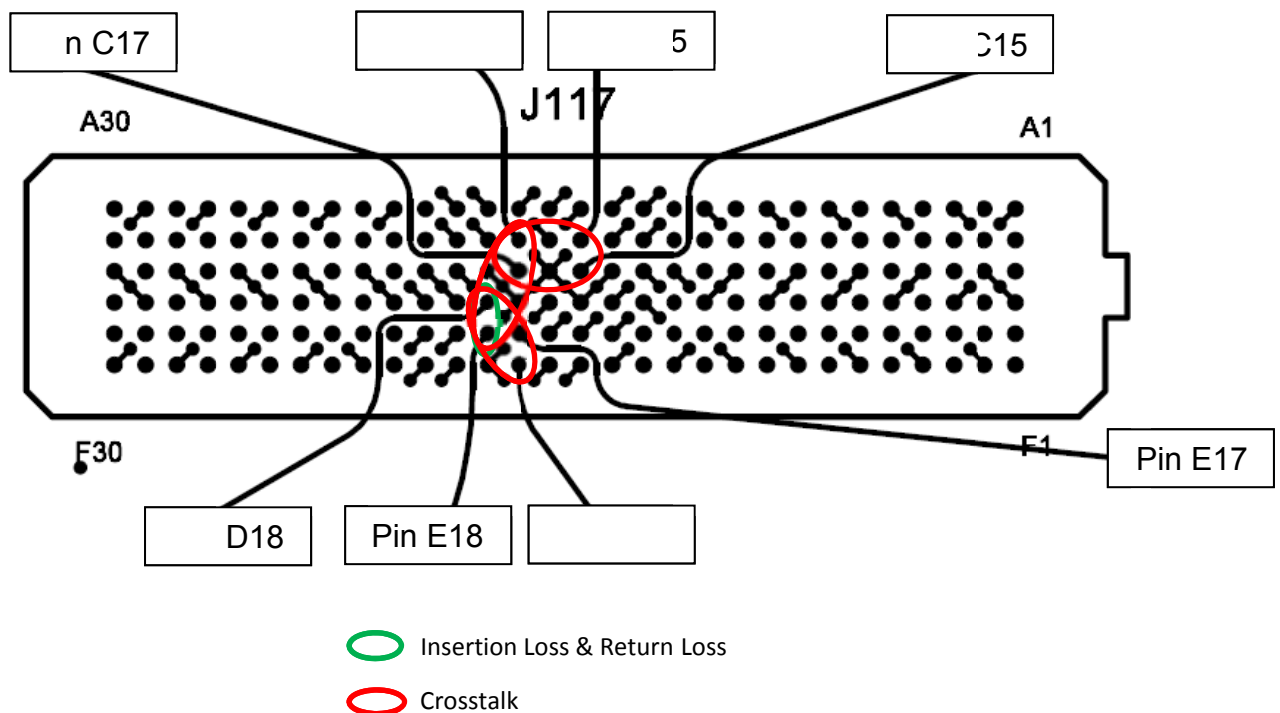

**Series:** SEAFP/SEAM Array Series

**Description:** 1.27mm x 1.27mm grid interconnect system, 12 mm Stack Height

## Bandwidth Charts – Single-Ended & Differential Insertion Loss

SEAFP/SEAM Array Series

