




## High Speed Characterization Report

**QTE-020-05-L-D-A**



**Mated With**



**QSE-020-01-L-D-A**

**Description:**  
**Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height**

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748”) Stack Height

## Table of Contents

|   |    |
|---|----|
| Connector Overview .....  | 1  |
| Connector System Speed Rating .....                               | 1  |
| Frequency Domain Data Summary .....                               | 2  |
| Table 1 - Single-Ended Connector System Performance .....         | 2  |
| Table 2 - Differential Connector System Bandwidth .....           | 2  |
| Time Domain Data Summary .....                                    | 3  |
| Table 3 - Single-Ended Impedance ( $\Omega$ ) .....               | 3  |
| Table 4 - Differential Impedance ( $\Omega$ ).....                | 3  |
| Table 5 - Single-Ended Crosstalk (%).....                         | 4  |
| Table 6 - Differential Crosstalk (%).....                         | 4  |
| Table 7 - Propagation Delay (Mated Connector) .....               | 4  |
| Characterization Details .....                                    | 5  |
| Differential and Single-Ended Data.....                           | 5  |
| Connector Signal to Ground Ratio .....                            | 5  |
| Frequency Domain Data .....                                       | 7  |
| Time Domain Data .....  | 7  |
| Appendix A – Frequency Domain Response Graphs .....               | 9  |
| Single-Ended Application – Insertion Loss .....                   | 9  |
| Single-Ended Application – Return Loss .....                      | 9  |
| Single-Ended Application – NEXT .....                             | 10 |
| Single-Ended Application – FEXT.....                              | 10 |
| Differential Application – Insertion Loss .....                   | 11 |
| Differential Application – Return Loss.....                       | 11 |
| Differential Application – NEXT .....                             | 12 |
| Differential Application – FEXT .....                             | 12 |
| Appendix B – Time Domain Response Graphs .....                    | 13 |
| Single-Ended Application – Input Pulse .....                      | 13 |
| Single-Ended Application – Impedance .....                        | 14 |
| Single-Ended Application – Propagation Delay .....                | 14 |
| Single-Ended Application – NEXT, “Worst Case” Configuration ..... | 15 |
| Single-Ended Application – FEXT, “Worst Case” Configuration ..... | 15 |
| Single-Ended Application – NEXT, “Best Case” Configuration .....  | 16 |
| Single-Ended Application – FEXT, “Best Case” Configuration .....  | 16 |
| Single-Ended Application – NEXT, Across Power/Ground Blade .....  | 17 |
| Single-Ended Application – FEXT, Across Power/Ground Blade .....  | 17 |
| Differential Application – Input Pulse .....                      | 18 |
| Differential Application – Impedance .....                        | 19 |
| Differential Application – Propagation Delay.....                 | 19 |
| Differential Application – NEXT, “Worst Case” Configuration ..... | 20 |

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748”) Stack Height

|  |    |
|--|----|
| Differential Application – FEXT, “Worst Case” Configuration..... | 20 |
| Differential Application – NEXT, “Best Case” Configuration ..... | 21 |
| Differential Application – FEXT, “Best Case” Configuration ..... | 21 |
| Differential Application – NEXT, Across Power/Ground Blade ..... | 22 |
| Differential Application – FEXT, Across Power/Ground Blade ..... | 22 |
| Appendix C – Product and Test System Descriptions .....          | 23 |
| Product Description .....  | 23 |
| Test System Description .....                                    | 23 |
| Appendix D – Test and Measurement Setup.....                     | 25 |
| Test Instruments .....   | 26 |
| Measurement Station Accessories .....                            | 26 |
| Test Cables & Adapters .....                                     | 26 |
| Appendix E - Frequency and Time Domain Measurements .....        | 27 |
| Frequency (S-Parameter) Domain Procedures .....                  | 27 |
| CSA8000 Setup .....  | 27 |
| Insertion Loss.....  | 28 |
| Return Loss.....   | 28 |
| Near-End Crosstalk (NEXT) .....                                  | 29 |
| Far-End Crosstalk (FEXT).....                                    | 29 |
| Time Domain Procedures .....                                     | 30 |
| Impedance .....  | 30 |
| Propagation Delay.....   | 30 |
| Crosstalk .....  | 30 |
| Appendix F – Glossary of Terms .....                             | 31 |

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Connector Overview

Q Strip® .8mm (.0315") pitch interfaces (QSE/QTE Series) are available with up to 140 I/Os and with standard board-to-board spacing of 5mm (0.197"), 8mm (0.315"), 11mm (0.433"), and 16mm (0.630") between boards. The data in this report is applicable only to an application specific 19mm (0.748") board-to-board stack height version.

## Connector System Speed Rating

QSE/QTE Series, Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

| <u>Signaling</u> | <u>Speed Rating</u>      |
|------------------|--------------------------|
| Single-Ended:    | <b>5.0 GHz / 10 Gbps</b> |
| Differential:    | <b>5.0 GHz / 10 Gbps</b> |

The Speed Rating is based on the -3 dB insertion loss point of the connector system. The -3 dB point can be used to estimate usable system bandwidth in a typical, two-level signaling environment.

To calculate the Speed Rating, the measured -3 dB point is rounded up to the nearest half-GHz level. The up-rounding corrects for a portion of the test board's trace loss, since trace losses are included in the loss data in this report. The resulting loss value is then doubled to determine the approximate maximum data rate in Gigabits per second (Gbps).

For example, a connector with a -3 dB point of 7.8 GHz would have a Speed Rating of 8 GHz/ 16 Gbps. A connector with a -3 dB point of 7.2 GHz would have a Speed Rating of 7.5 GHz/ 15 Gbps.


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Frequency Domain Data Summary

| Table 1 - Single-Ended Connector System Performance |                  |                       |
|---|------------------|-----------------------|
| Test Parameter                                      | Configuration    |                       |
| Insertion Loss                                      | GSG              | <b>-3dB @ 4.56GHz</b> |
| Return Loss   | GSG              | < -5dB to 4.56GHz     |
| Near-End Crosstalk                                  | GAQG             | < -5dB to 4.56GHz     |
|   | GAGQG            | < -22dB to 4.56GHz    |
|   | Xrow, GAG to GQG | < -35dB to 4.56GHz    |
| Far-End Crosstalk                                   | GAQG             | < -18dB to 4.56GHz    |
|   | GAGQG            | < -20dB to 4.56GHz    |
|   | Xrow, GAG to GQG | < -30dB to 4.56GHz    |

| Table 2 - Differential Connector System Bandwidth |                    |                       |
|---|--------------------|-----------------------|
| Test Parameter                                    | Configuration      |                       |
| Insertion Loss                                    | GSSG               | <b>-3dB @ 4.50GHz</b> |
| Return Loss                                       | GSSG               | < -5dB to 4.50GHz     |
| Near-End Crosstalk                                | GAAQQG             | < -18dB to 4.50GHz    |
|   | GAAGQQG            | < -25dB to 4.50GHz    |
|   | Xrow, GAAG to GQQG | < -40dB to 4.50GHz    |
| Far-End Crosstalk                                 | GAQG               | < -25dB to 4.50GHz    |
|   | GAGQG              | < -25dB to 4.50GHz    |
|   | Xrow, GAAG to GQQG | < -40dB to 4.50GHz    |

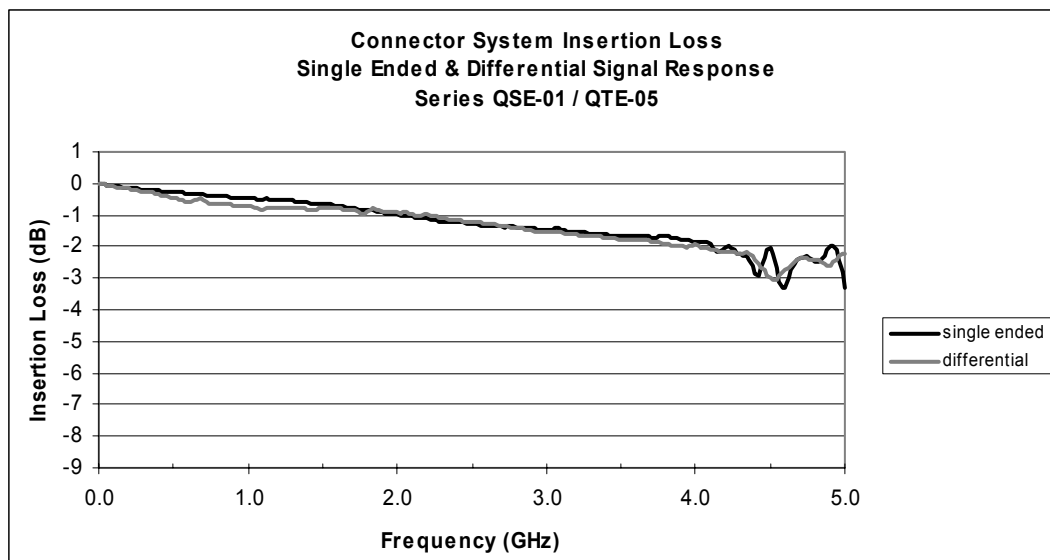


Series: QSE/QTE


Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Time Domain Data Summary

| Table 3 - Single-Ended Impedance ( $\Omega$ ) |              |       |        |        |        |        |      |
|---|--------------|-------|--------|--------|--------|--------|------|
| Signal Risetime                               | 30 $\pm$ 5ps | 50 ps | 100 ps | 250 ps | 500 ps | 750 ps | 1 ns |
| Maximum Impedance                             | 64.9         | 59.8  | 58.1   | 52.9   | 51.6   | 51.2   | 51.1 |
| Minimum Impedance                             | 39.5         | 42.5  | 44.8   | 47.9   | 49.9   | 50.2   | 50.1 |

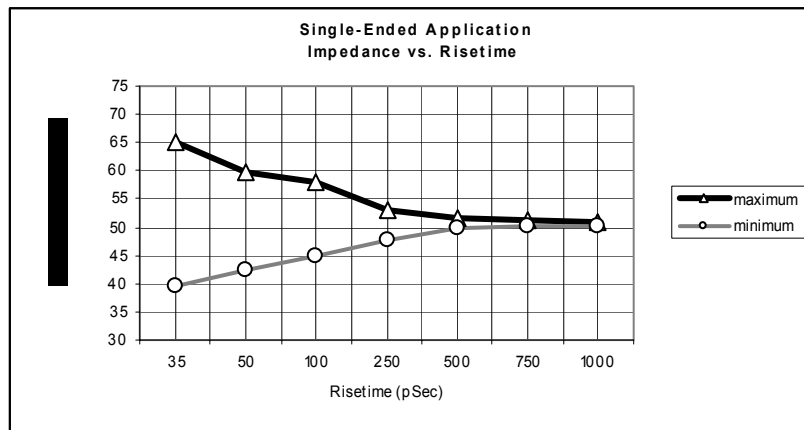

| Table 4 - Differential Impedance ( $\Omega$ ) |              |       |        |        |        |        |       |
|---|--------------|-------|--------|--------|--------|--------|-------|
| Signal Risetime                               | 30 $\pm$ 5ps | 50 ps | 100 ps | 250 ps | 500 ps | 750 ps | 1 ns  |
| Maximum Impedance                             | 106.8        | 106.4 | 105.9  | 105.3  | 104.8  | 104.4  | 104.3 |
| Minimum Impedance                             | 67.8         | 72.3  | 78.7   | 87.3   | 92.1   | 94.9   | 96.4  |

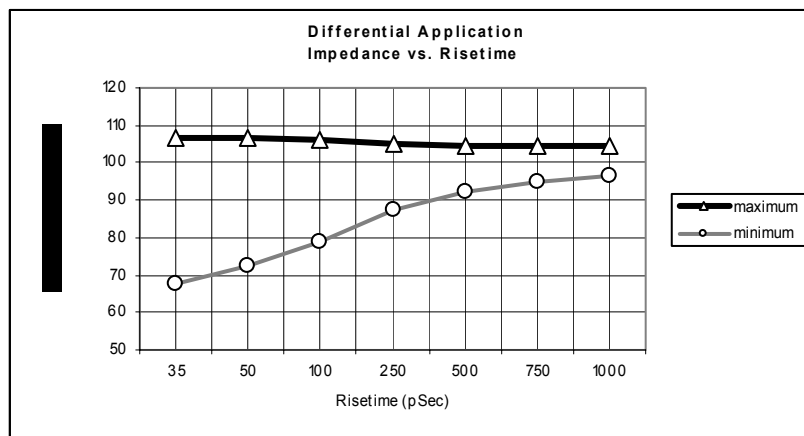

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

**Table 5 - Single-Ended Crosstalk (%)**

| Input (t <sub>r</sub> ) |                    | 30±5ps | 50 ps | 100 ps | 250 ps | 500 ps | 750 ps | 1 ns  |
|-------------------------|--------------------|--------|-------|--------|--------|--------|--------|-------|
| NEXT                    | GAQG               | 17.8   | 17.3  | 16.6   | 12.9   | 8.2    | 5.9    | 4.6   |
|                         | GAGQG              | 3.5    | 2.8   | 2.4    | 1.7    | 1.1    | < 1.0  | < 1.0 |
|                         | Xrow <sup>se</sup> | < 1.0  | < 1.0 | < 1.0  | < 1.0  | < 1.0  | < 1.0  | < 1.0 |
| FEXT                    | GAQG               | 5.0    | 4.2   | 3.6    | 2.4    | 1.5    | 1.1    | < 1.0 |
|                         | GAGQG              | 2.7    | 2.0   | 1.3    | < 1.0  | < 1.0  | < 1.0  | < 1.0 |
|                         | Xrow <sup>se</sup> | < 1.0  | < 1.0 | < 1.0  | < 1.0  | < 1.0  | < 1.0  | < 1.0 |

**Table 6 - Differential Crosstalk (%)**

| Input (t <sub>r</sub> ) |                      | 30±5ps | 50 ps | 100 ps | 250 ps | 500 ps | 750 ps | 1 ns  |
|-------------------------|----------------------|--------|-------|--------|--------|--------|--------|-------|
| NEXT                    | GAAQQG               | 5.7    | 5.3   | 4.9    | 3.7    | 2.4    | 1.7    | 1.4   |
|                         | GAAGQQG              | < 1.0  | < 1.0 | < 1.0  | < 1.0  | < 1.0  | < 1.0  | < 1.0 |
|                         | Xrow <sup>diff</sup> | < 1.0  | < 1.0 | < 1.0  | < 1.0  | < 1.0  | < 1.0  | < 1.0 |
| FEXT                    | GAAQQG               | 1.2    | < 1.0 | < 1.0  | < 1.0  | < 1.0  | < 1.0  | < 1.0 |
|                         | GAAGQQG              | < 1.0  | < 1.0 | < 1.0  | < 1.0  | < 1.0  | < 1.0  | < 1.0 |
|                         | Xrow <sup>diff</sup> | < 1.0  | < 1.0 | < 1.0  | < 1.0  | < 1.0  | < 1.0  | < 1.0 |

**Table 7 - Propagation Delay (Mated Connector)**

|                     |          |
|---------------------|----------|
| <b>Single-Ended</b> | 156.0 ps |
| <b>Differential</b> | 156.0 ps |

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

### Characterization Details

This report presents data which characterizes the signal integrity response of a connector pair in a controlled printed circuit board (PCB) environment. All efforts are made to reveal typical best-case responses inherent to the system under test (SUT).

In this report, the SUT includes the test PCB from drive side probe tips to receive side probe tips. PCB effects are not removed or de-embedded from the test data. PCB designs with impedance mismatch, large losses, skew, cross talk, or similar impairments can have a significant impact on observed test data. Therefore, great design effort is put forth to limit these effects in the PCB utilized in these tests. Some board related effects, such as pad-to-ground capacitance and trace loss, are included in the data presented in this report. But other effects, such as via coupling or stub resonance, are not evaluated here. Such effects are addressed and characterized fully by the Samtec [Final Inch®](#) products.

Additionally, intermediate test signal connections can mask the connectors' true performance. Such connection effects are minimized by using high performance test cables, adapters, and microwave probes. Where appropriate, calibration and de-embedding routines are also used to reduce residual effects.

### Differential and Single-Ended Data

Most Samtec connectors can be used successfully in both differential and single-ended applications. However, electrical performance will differ depending on the signal drive type. In this report, data is presented for both differential and single-ended drive scenarios.

### Connector Signal to Ground Ratio

Samtec connectors are most often designed for generic applications, and can be implemented using various signal and ground pin assignments. In high speed systems, provisions must be made in the interconnect for signal return currents. Such paths are often referred to as "ground". In some connectors, a ground plane or blade, or an outer shield is used as the signal return, while in others, connector pins are used as signal returns. Various combinations of signal pins, ground blades, and shields can also be utilized. Electrical performance can vary significantly depending upon the number and location of ground pins.

In general, the more pins dedicated to ground, the better electrical performance will be. But dedicating pins to ground reduces signal density of a connector. So care must be taken when choosing signal/ground ratios in cost- or density-sensitive applications.

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

For this connector, the following configurations were evaluated:

Single-Ended Impedance:

- GSG (ground-signal-ground)

Single-Ended Crosstalk:

- Electrical "worst case": GAQG (ground-active-quiet-ground)
- Electrical "best case": GAGQG (ground-active-ground-quiet-ground)
- Across row:  $X_{row}^{se}$  (from one row of terminals to the other row across the ground blade)

Differential Impedance:

- GSSG (Ground-positive signal-negative signal-ground)

Differential Crosstalk:

- Electrical "worst case": GAAQQG (ground-active-active-quiet-quiet-ground)
- Electrical "best case": GAAGQQG (ground-active-active-ground-quiet-quiet-ground)
- Across row:  $X_{row}^{diff}$  (from one row of terminals to the other row across the ground blade)

In all cases in this report, the center ground blade of the connector was grounded to the PCB. Only one single-ended signal or differential pair was driven for crosstalk measurements.

Other configurations can be evaluated upon request. Please contact [sig@samtec.com](mailto:sig@samtec.com) for more information.

In a real system environment, active signals might be located at the outer edges of the signal contacts of concern, as opposed to the ground signals utilized in laboratory testing. For example, in a single-ended system, a pin-out of "SSSS", or four adjacent single ended signals, might be encountered, as opposed to the "GSG" and "GSSG" configurations tested in the laboratory. Electrical characteristics in such applications could vary slightly from laboratory results. But in most applications, performance can safely be considered equivalent.

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

### Signal Edge Speed (Rise Time):

In pulse signaling applications, the perceived performance of an interconnect can vary significantly depending on the edge rate or rise time of the exciting signal. For this report, the fastest rise time used was 30 +/-5 ps. Generally, this should demonstrate worst case performance.

In many systems, the signal edge rate will be significantly slower at the connector than at the driver launch point. To estimate interconnect performance at other edge rates, data is provided for several rise times between 30 ps and 1.0 ns.

For this report, rise times were measured at 10%-90% signal levels.

### **Frequency Domain Data**

Frequency domain parameters are helpful in evaluating the connector system's signal loss and crosstalk characteristics across a range of sinusoidal frequencies. In this report, parameters presented in the frequency domain are insertion loss, return loss, and near-end and far-end crosstalk. Other parameters or formats, such as VSWR or S-parameters, may be available upon request. Please contact our Signal Integrity Group at [sig@samtec.com](mailto:sig@samtec.com) for more information.

Frequency performance characteristics for the SUT are generated from time domain measurements using Fourier Transform calculations. Procedures and methods used in generating the SUT's frequency domain data are provided in the frequency domain test procedures in [Appendix E](#) of this report.

### **Time Domain Data**

Time Domain parameters indicate impedance mismatch versus length, signal propagation time, and crosstalk in a pulsed signal environment. Time Domain data is provided in [Appendix E](#) of this report. Parameters or formats not included in this report may be available upon request. Please contact our Signal Integrity Group at [sig@samtec.com](mailto:sig@samtec.com) for more information.

Reference plane impedance is 50 ohms for single-ended measurements and 100 ohms for differential measurements. The fastest risetime signal exciting the SUT is 30 ± 5 picoseconds.

In this report, propagation delay is defined as the signal propagation time through the PCB connector pads and connector pair. It does not include PCB traces. Delay is measured at 30 ± 5 picoseconds signal risetime. Delay is calculated as the difference in time measured between the 50% amplitude levels of the input and output pulses.

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

Crosstalk or coupled noise data is provided for various signal configurations. All measurements are single disturber. Crosstalk is calculated as a ratio of the input line voltage to the coupled line voltage. The input line is sometimes described as the active or drive line. The coupled line is sometimes described as the quiet or victim line. Crosstalk ratio is tabulated in this report as a percentage. Measurements are made at both the near-end and far-end of the SUT.

Data for other configurations may be available. Please contact our Signal Integrity Group at [sig@samtec.com](mailto:sig@samtec.com) for further information.

As a rule of thumb, 10% crosstalk levels are often used as a general first pass limit for determining acceptable interconnect performance. But modern system crosstalk tolerance can vary greatly. For advice on connector suitability for specific applications, please contact our Signal Integrity Group at [sig@samtec.com](mailto:sig@samtec.com).


Additional information concerning test conditions and procedures is located in the appendices of this report. Further information may be obtained by contacting our Signal Integrity Group at [sig@samtec.com](mailto:sig@samtec.com).

Series: QSE/QTE


Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

### Appendix A – Frequency Domain Response Graphs

#### Single-Ended Application – Insertion Loss

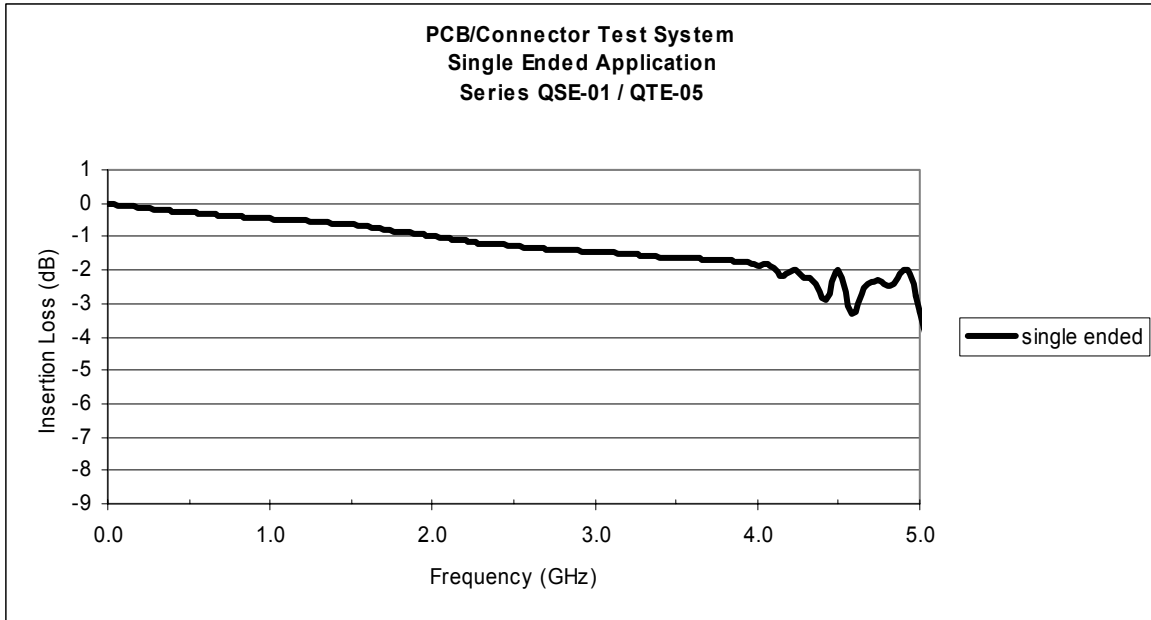


#### Single-Ended Application – Return Loss

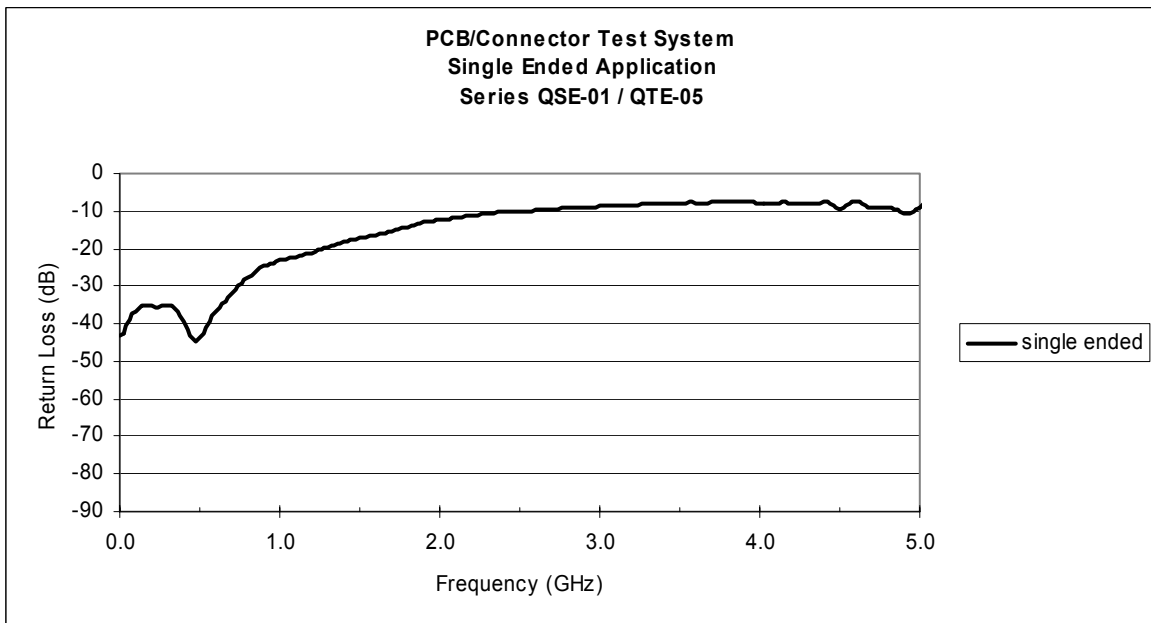


**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Single-Ended Application – NEXT

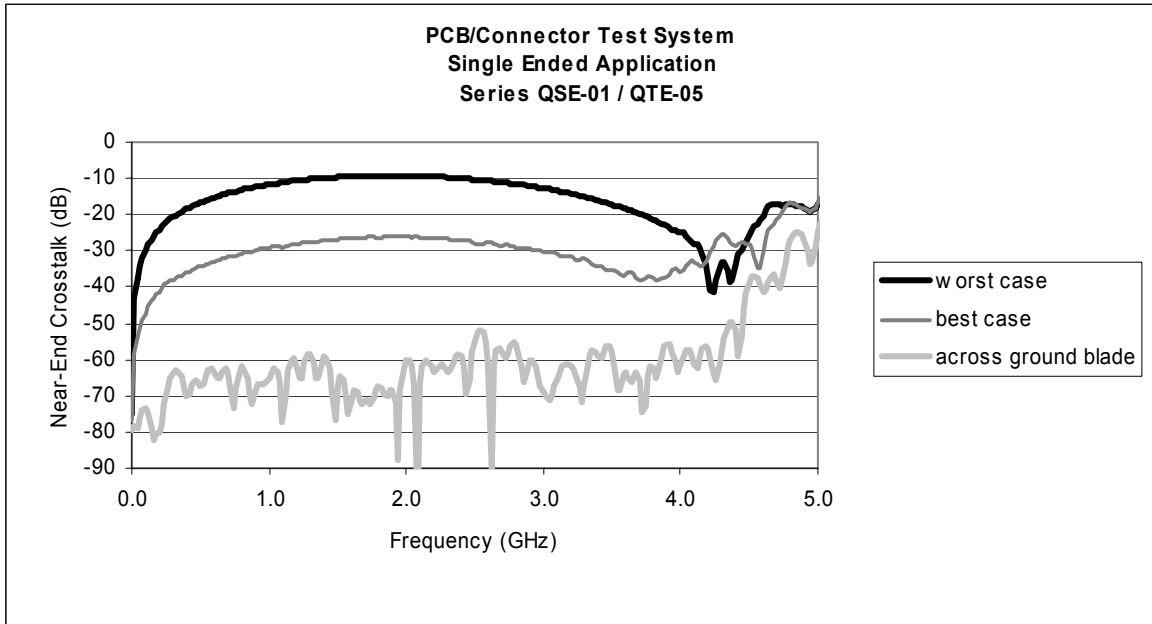


## Single-Ended Application – FEXT

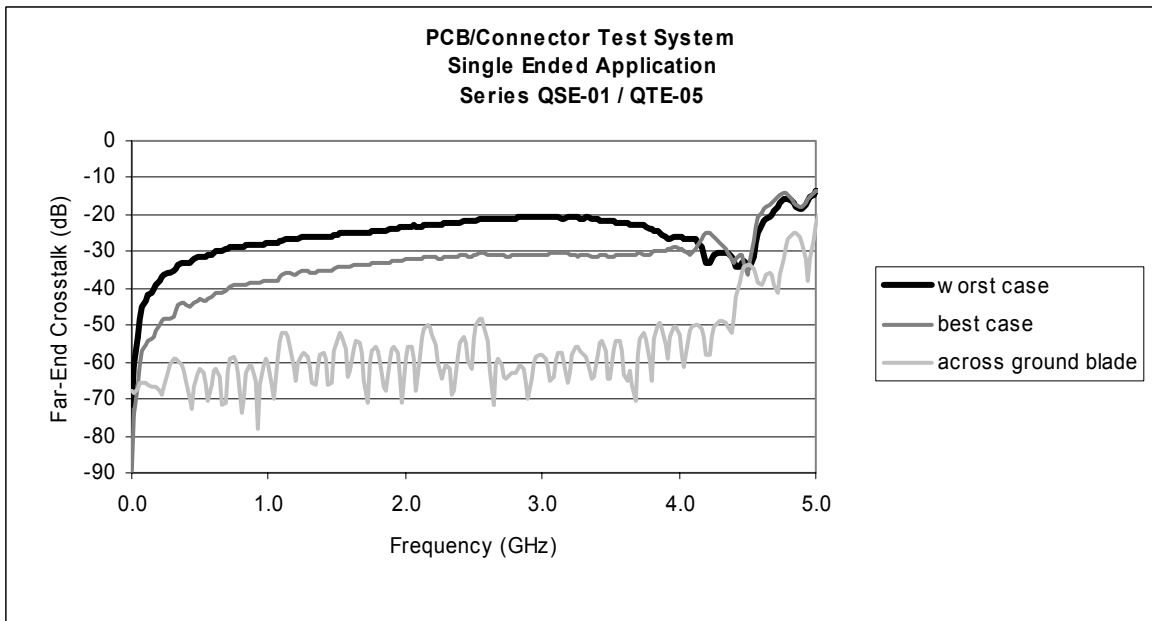


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

### Differential Application – Insertion Loss

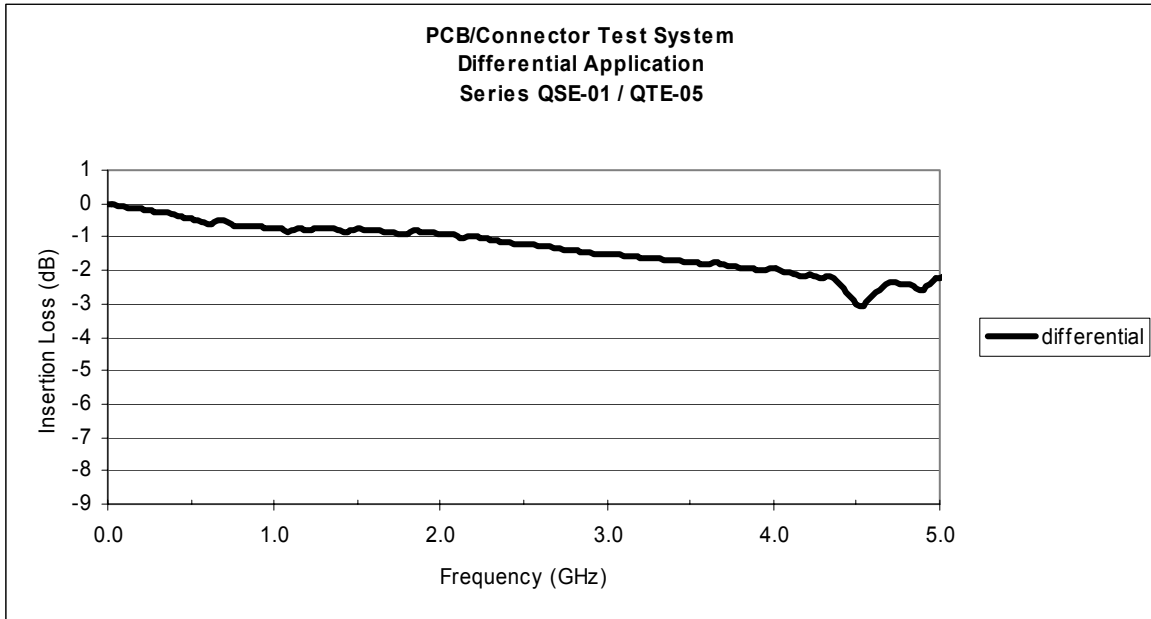


### Differential Application – Return Loss

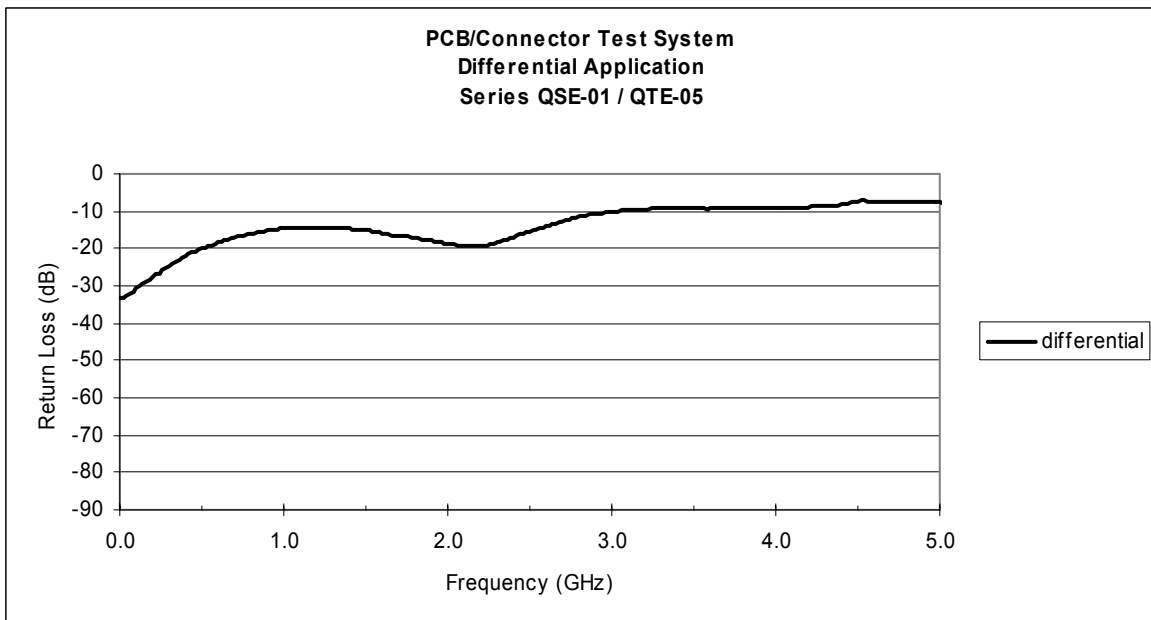


**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Differential Application – NEXT

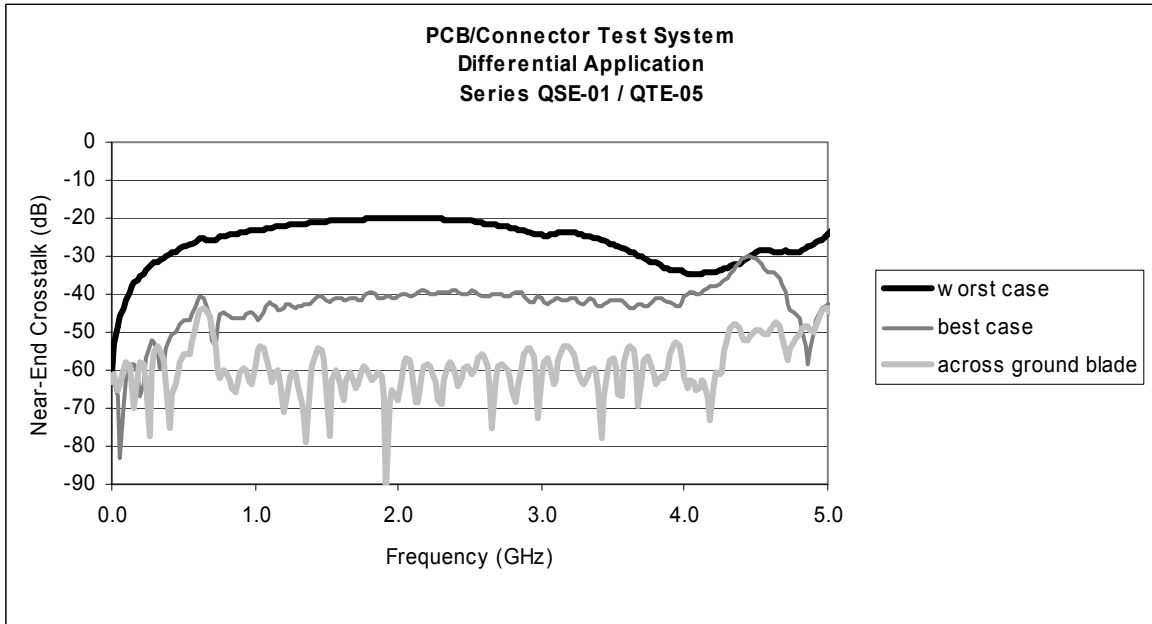

## Differential Application – FEXT

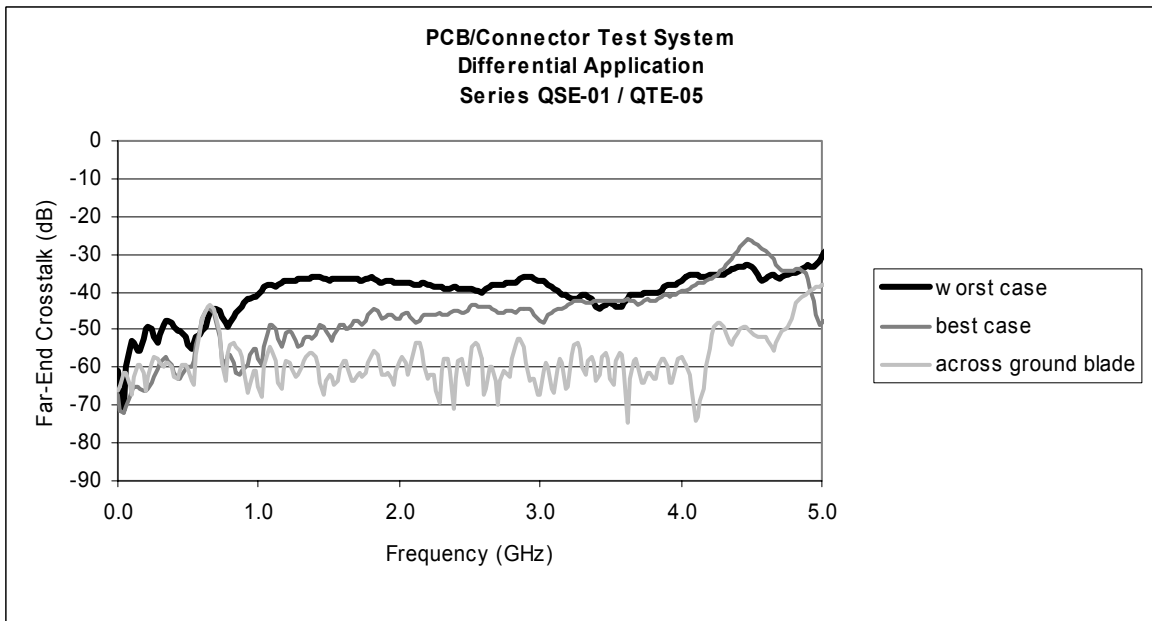


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Appendix B – Time Domain Response Graphs


### Single-Ended Application – Input Pulse

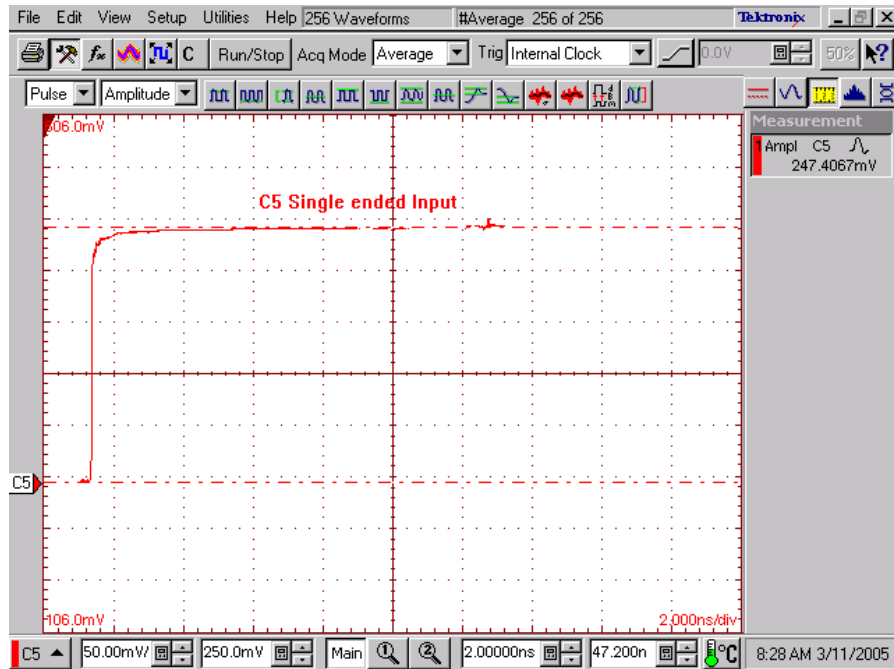


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Single-Ended Application – Impedance

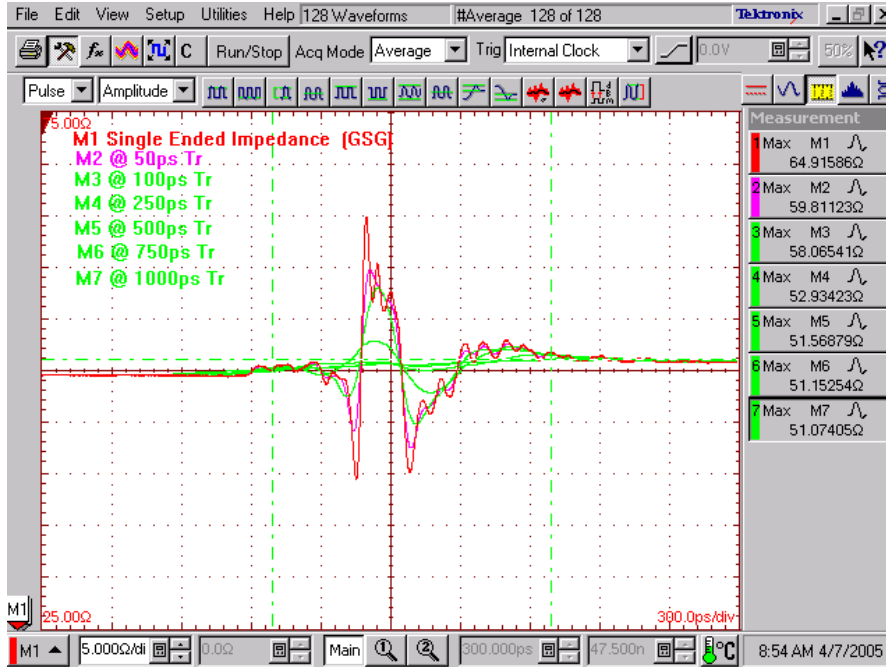


## Single-Ended Application – Propagation Delay

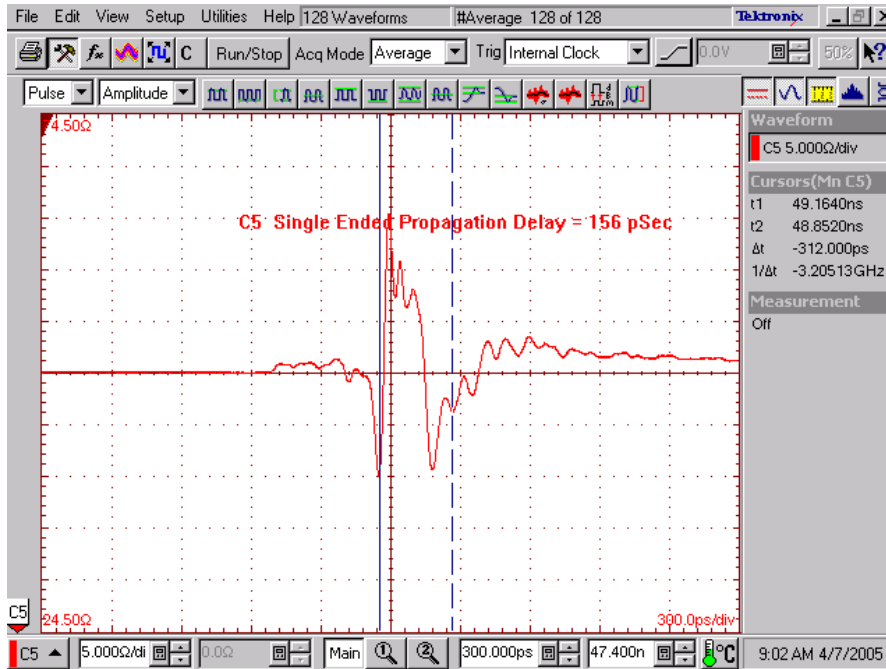


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Single-Ended Application – NEXT, “Worst Case” Configuration

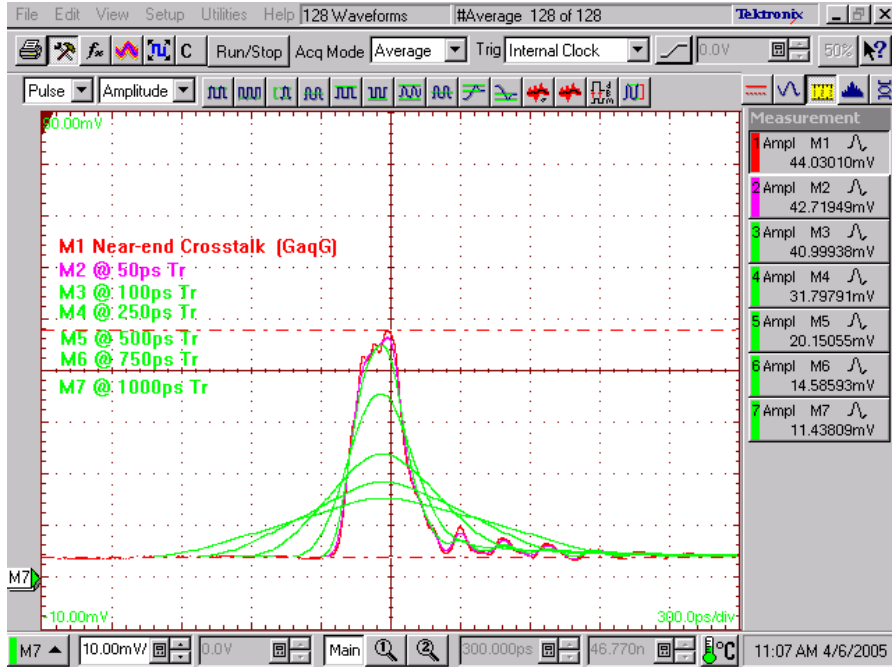


## Single-Ended Application – FEXT, “Worst Case” Configuration

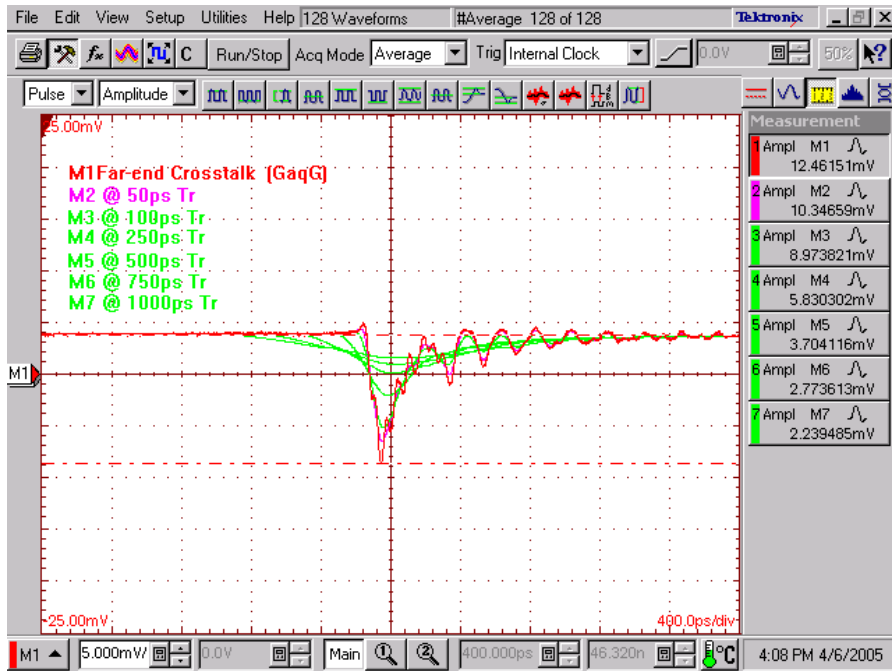


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Single-Ended Application – NEXT, “Best Case” Configuration

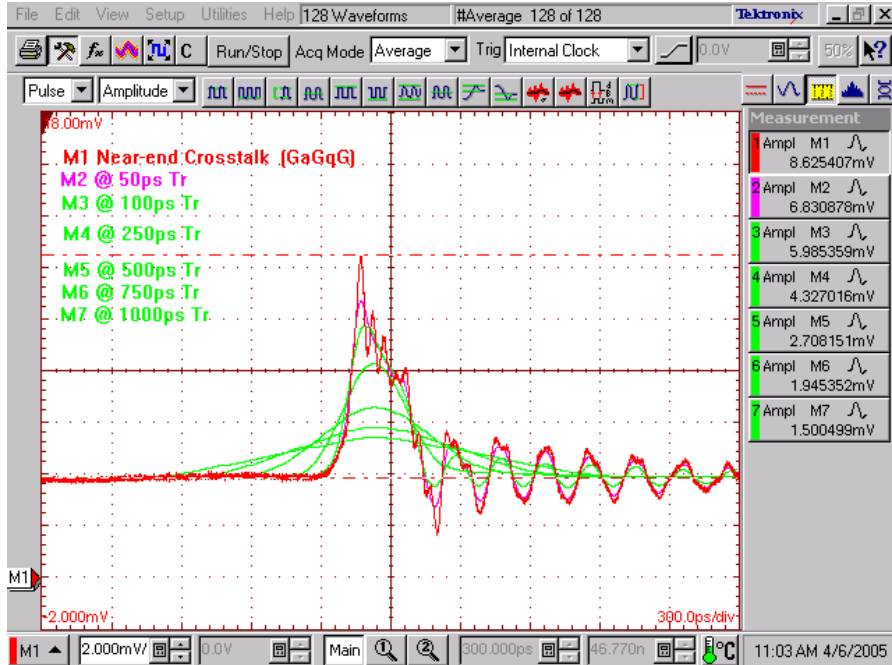


## Single-Ended Application – FEXT, “Best Case” Configuration

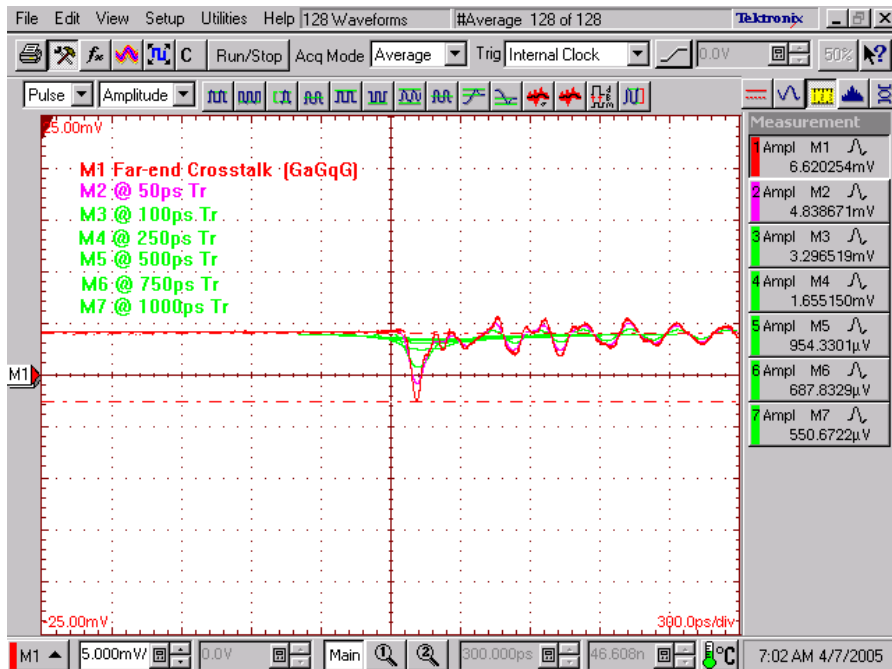


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Single-Ended Application – NEXT, Across Power/Ground Blade

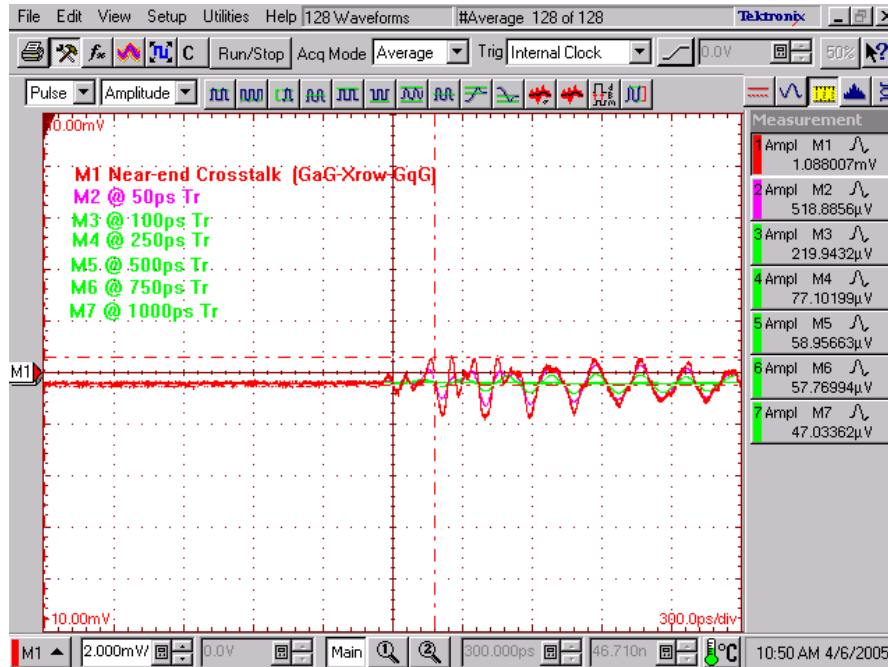


## Single-Ended Application – FEXT, Across Power/Ground Blade

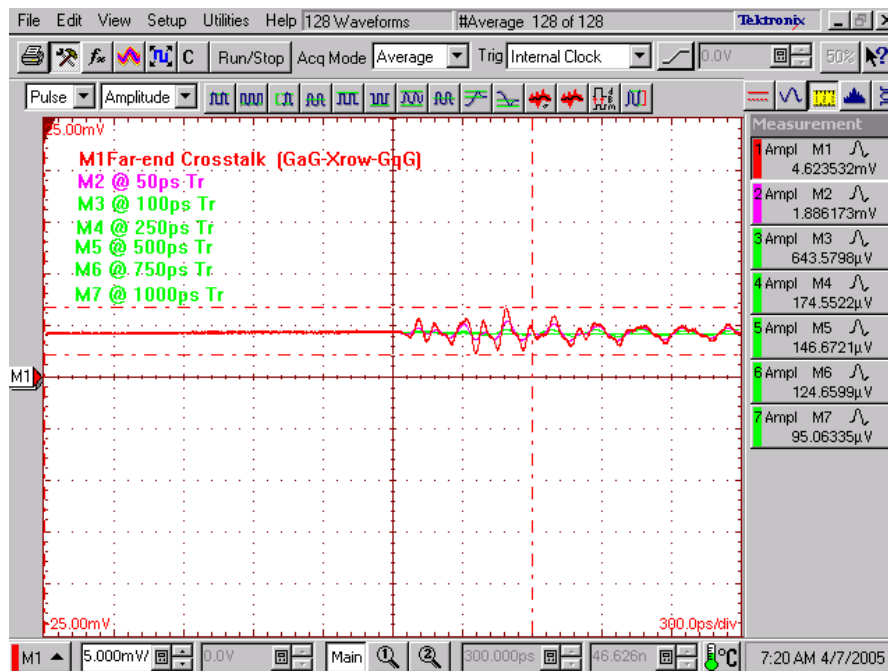

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height


## Differential Application – Input Pulse

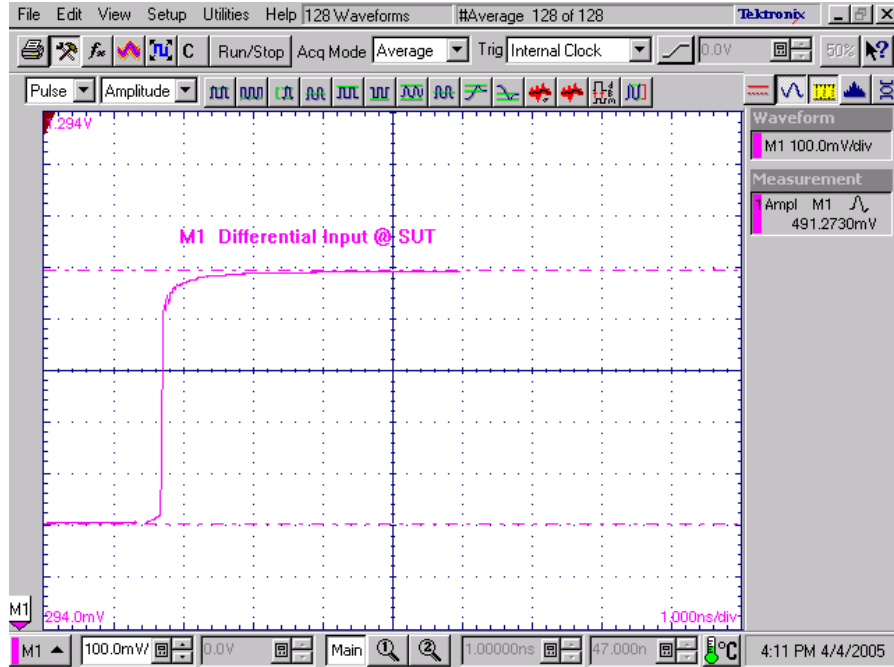


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Differential Application – Impedance

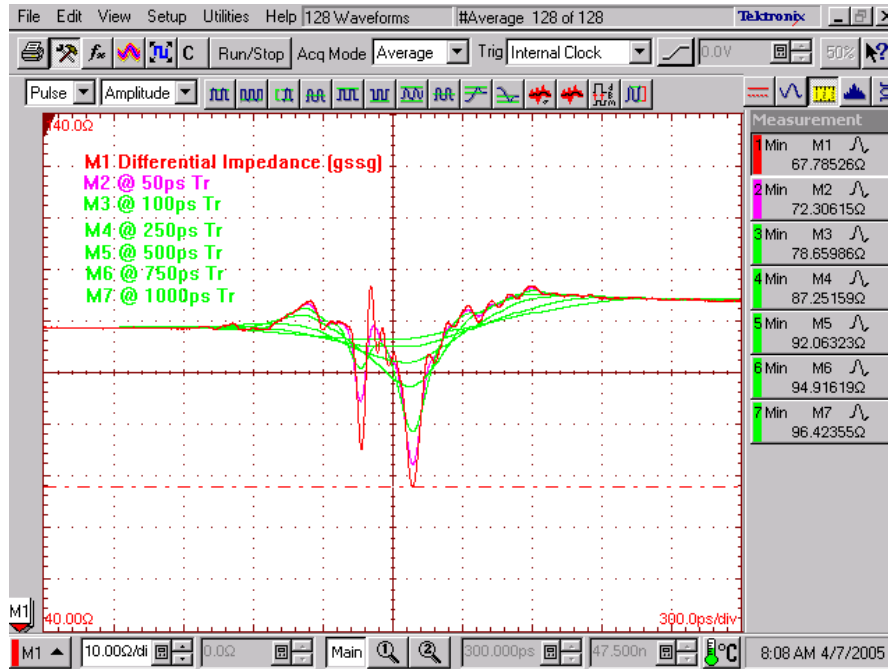


## Differential Application – Propagation Delay

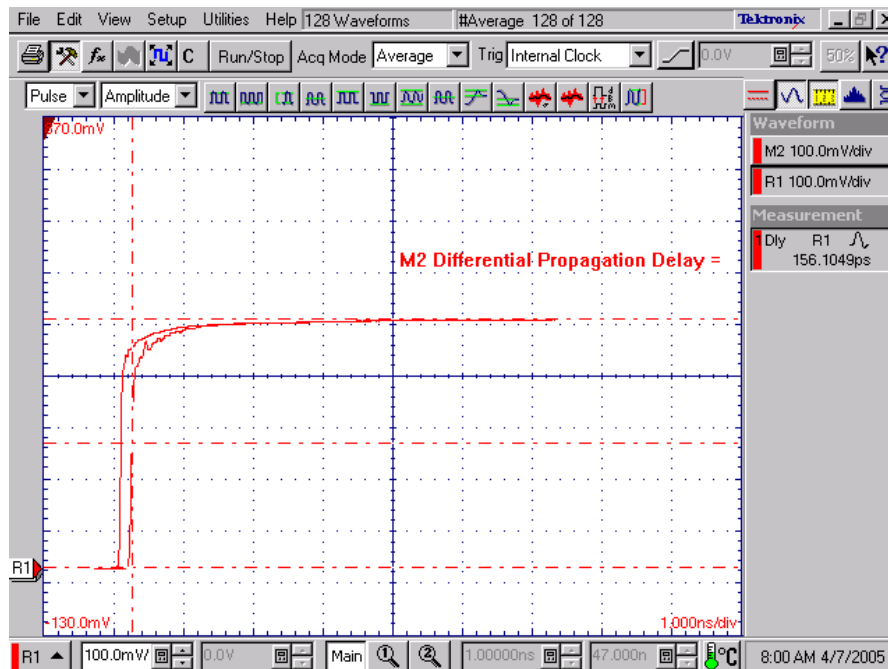


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Differential Application – NEXT, “Worst Case” Configuration

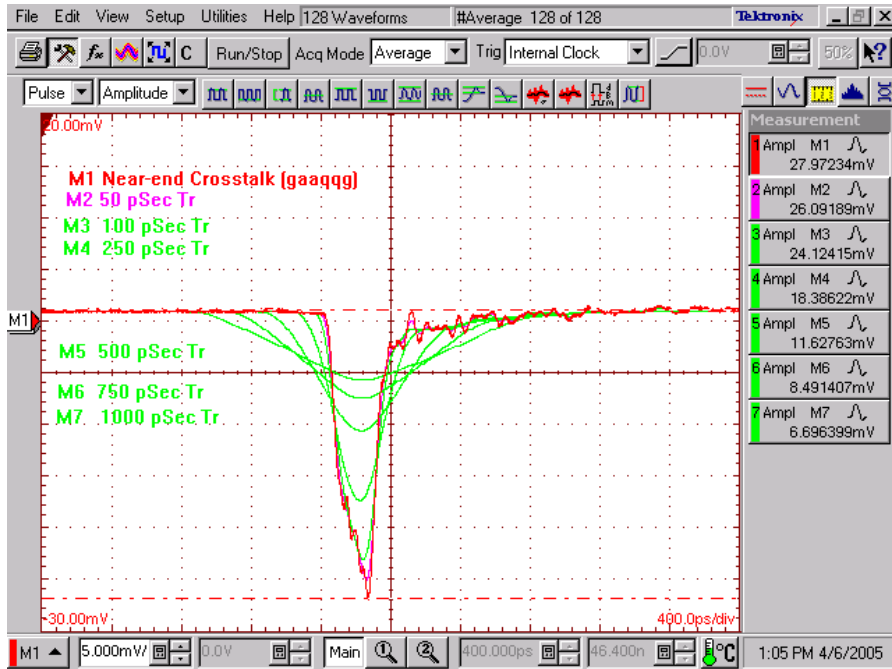


## Differential Application – FEXT, “Worst Case” Configuration

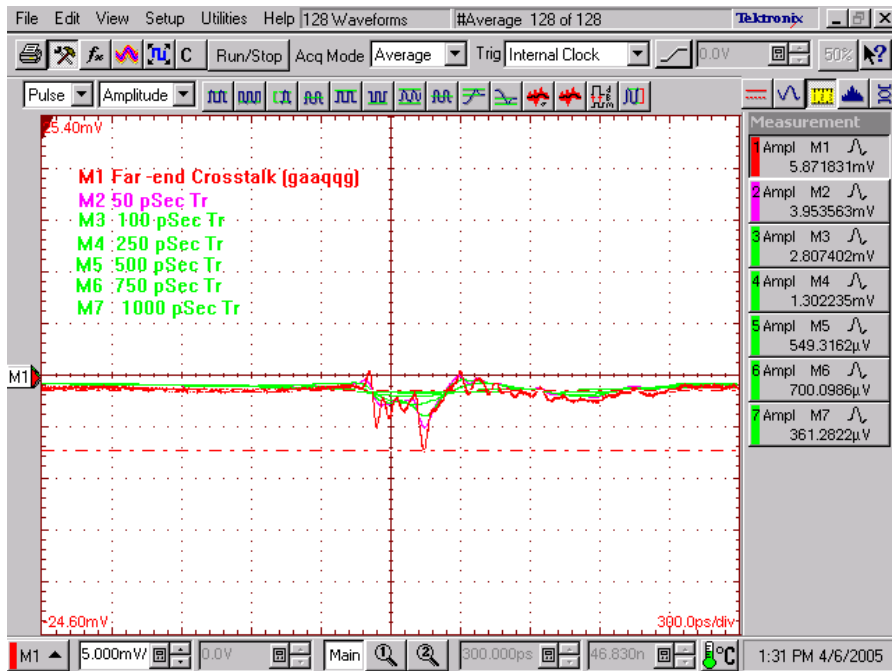


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Differential Application – NEXT, “Best Case” Configuration

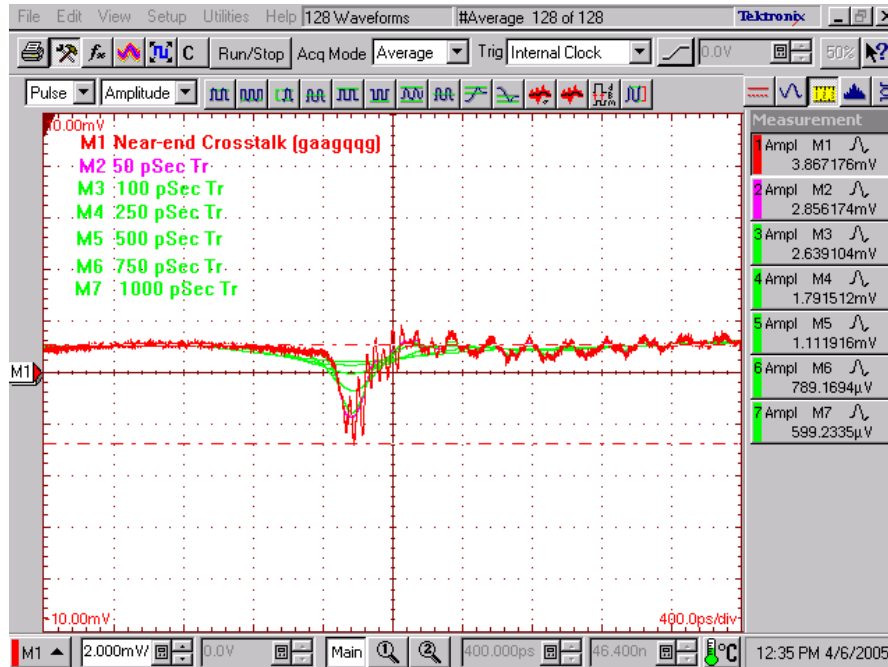


## Differential Application – FEXT, “Best Case” Configuration

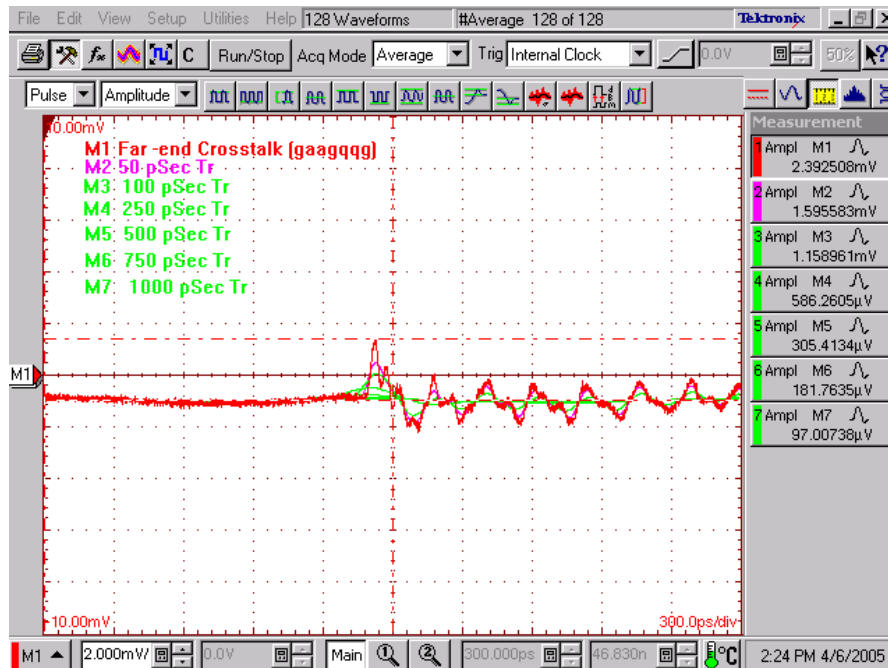


Series: QSE/QTE

Description: Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Differential Application – NEXT, Across Power/Ground Blade

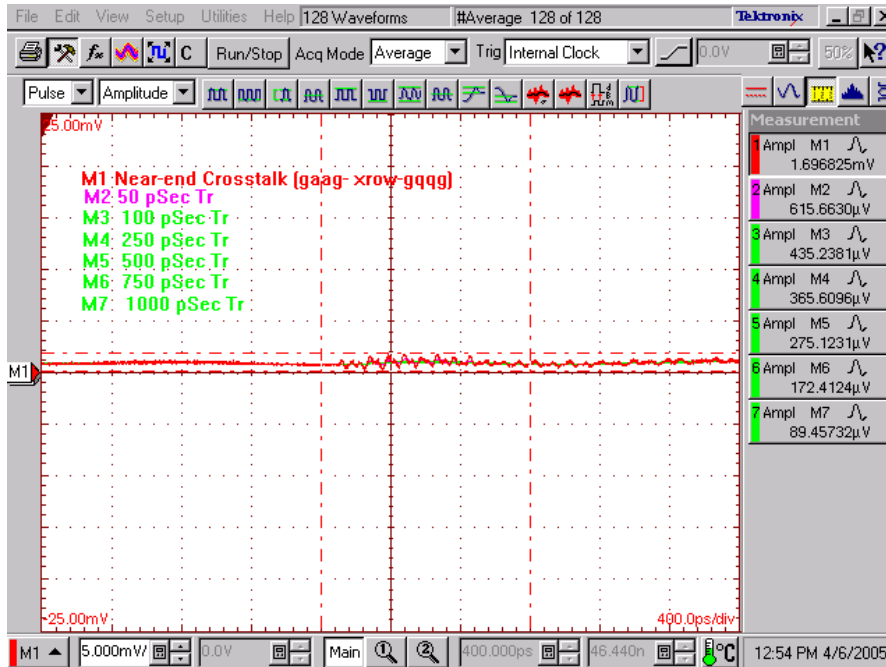

## Differential Application – FEXT, Across Power/Ground Blade

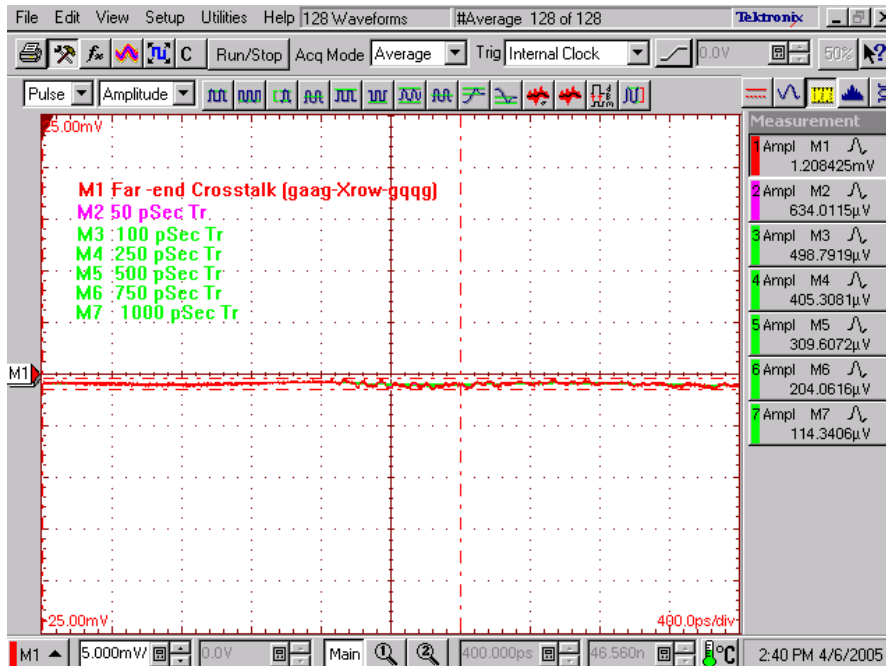

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Appendix C – Product and Test System Descriptions


### Product Description

Product samples are the 19mm (0.748") stack height Q Strip® High Speed QSE Series sockets P/N QSE-020-01-X-D-A and P/N QSE-040-01-X-D-A. The mating QTE Series headers are P/N QTE-020-05-X-D-A and P/N QTE-040-05-X-D-A respectively.

*Each connector structure consists of 2 rows of 20 or 40 positions mounted into a plastic housing with a surface mount design. A conductive ground/power blade lies lengthwise between terminal rows in the housing. The contacts are evenly spaced at a .8mm (.0315") pitch*

### Test System Description

The Test fixtures are composed of a 4-layer FR-4 material with 50Ω and 100Ω signal trace and pad configurations designed for the electrical characterization of Samtec high-speed connector products. The pictured fixtures are specific to the QSE/QTE series connector and are identified by Samtec P/N PCB-100233-TST-01 and P/N PCB-100233-TST-02 (Figure 1)

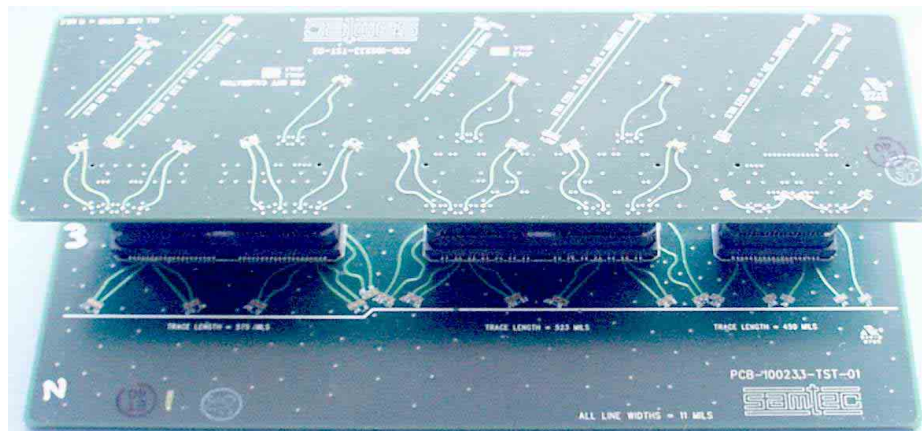


**Figure 1 Mated PCB Test Fixture with Mounted Test Connectors**

Terminated onto P/N PCB-100233-TST-01 (Figure 2) are three QSE socket series connectors. The 20 position (Rt.) standard connector is setup for characterizing single ended type signals (GSG). The 40 position connector (Lt.) characterizes differential type signals(GSSG). The 28 pair connector pictured in the middle characterizes differential pairs with specified grounded terminals or in a totally open pin field fashion. However, test results from this connector type are documented in a separate report


**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

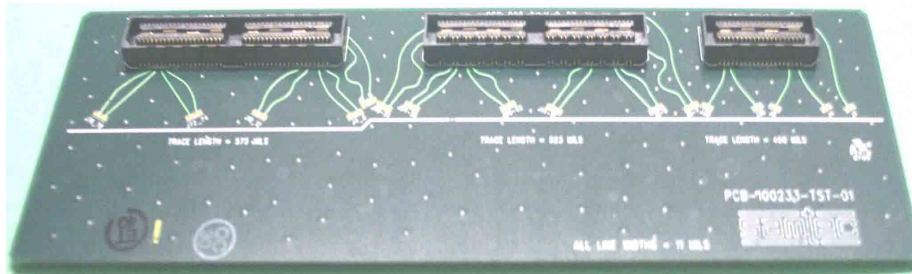

**Figure 2 (Lt. to Rt.) QSE-040-01-X-D-A, QSE-028-01-X-D-A, QSE-020-01-X-D-A**

P/N PCB-100233-TST-02 accepts the QTE terminal connectors (Figure 3) and is designed to mate with PCB-100233-TST-01. Design differences are that signal traces propagate through the board and are located on the opposite side from the mating connectors. QTE trace transitions can be observed on the top board in Figure 1.

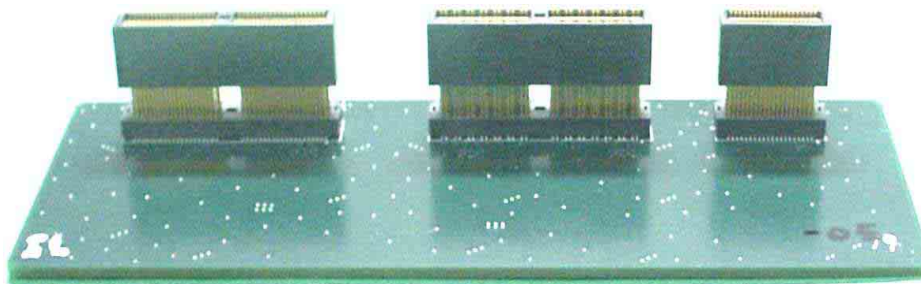

**Figure 3 (Lt. to Rt.) QTE-040-05-X-D-A, QTE-028-05-X-D-A, QTE-020-05-X-D-A**

Test point signal paths coincide with each other upon mating and are marked accordingly. Single ended 20 position signal terminal paths are J4, J7, J8, J36 and J38. Differential signal terminal paths for the 40 position connector are J4\_6, J9\_11, J10\_12, J72\_74 and J76\_78. All signal paths are for monitoring through or adjacent signaling test conditions with the exception of the J7 and J9\_11. These conditions are setup for monitoring signal conditions across the terminal rows.

Both the single-ended and differential fixtures "J" number represents each terminal's designated position within the connector. Signals can be launched or received from either the socket or header side of the connector. All data and waveforms presented in the report are results from a socket side signal launch.


**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Appendix D – Test and Measurement Setup

Test instruments are a Tektronix CSA8000 Communication Signal Analyzer Mainframe and the Agilent 8720ES Vector Network Analyzer. Four bays of the CSA8000 are occupied with three Tektronix 80E04 TDR/Sampling Heads and one Tektronix 80E03 Sampling Head. For this series of tests, four of the eight TDR/Sampling Head capability is used (*Figure 8*). The 8720ES serves as a supporting test instrument for verification or troubleshooting results obtained from the TDA Systems IConnect Software package. IConnect is a TDR based measurement software tool used in generating frequency domain related responses from high speed interconnects.

The probe stations illuminated video microscopy system, microprobe positioners, and 40GHz capable probes provide both the mechanical properties and electrical characteristics for obtaining the precise signal launch and calibrations that are critical in obtaining accurate high speed measurements. The 450 micron pitch probes are located to PCB launch points with 25X to 175X magnification and XYZ fine positioning adjustments available from both the probe table and micro-probe positioners. Electrically the micro-wave probes rate a < 1.0 dB insertion loss, a < 18 dB return loss, and an isolation of 38 dB to 40 GHz (*Figure 8*). Test cables and interconnect adapters are high quality and insure high-bandwidth and low parasitic measurements.

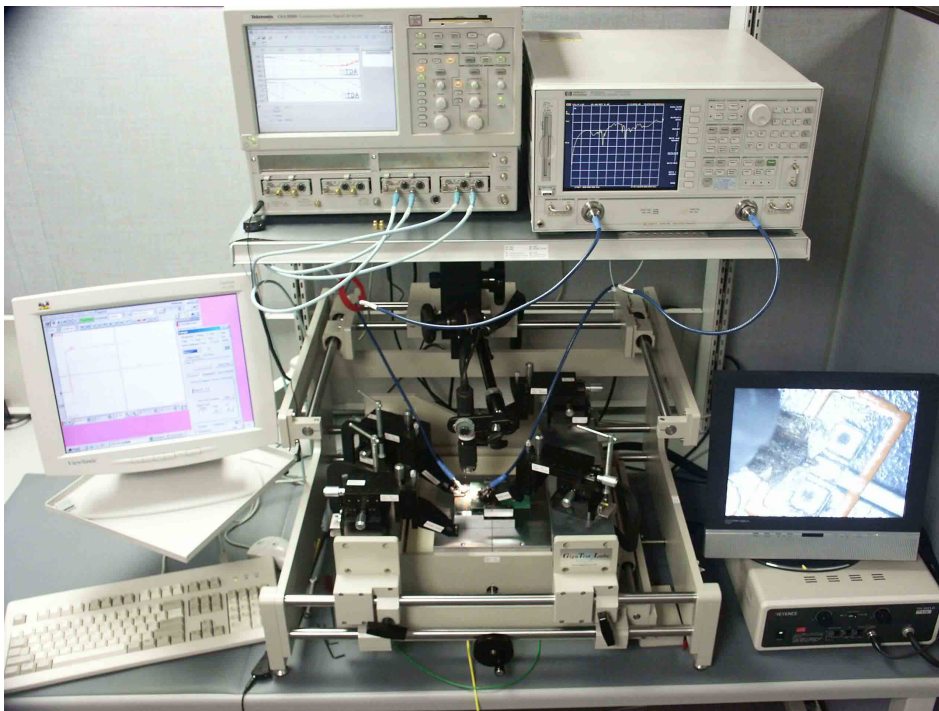


**Figure 4 – Probe Station Measurements Capability**

**Series:** QSE/QTE**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height**Test Instruments**

| <u>QTY</u> | <u>Description</u>                                       |
|------------|--|
| 1          | Tektronix CSA8000 Communication Signal Analyzer          |
| 3          | Tektronix 80E04 Dual Channel 20 GHz TDR Sampling Module  |
| 1          | Tektronix 80E03 Dual Channel 20 GHz Sampling Module      |
| 1          | Agilent 8720ES Vector Network Analyzer, 50 MHz to 20 GHz |

**Measurement Station Accessories**

| <u>QTY</u> | <u>Description</u>   |
|------------|--|
| 1          | GigaTest Labs Model (GTL3030) Probe Station                              |
| 4          | GTL Micro-Probe Positioners  |
| 2          | Picoprobe by GGB Ind. Model 40A GSG (single ended applications)          |
| 2          | Picoprobe by GGB Ind. Dual Model 40A GSG-GSG (differential applications) |
| 1          | Keyence VH-5910 High Resolution Video Microscope                         |
| 1          | Keyence VH-W100 Fixed Magnification Lens 100 X                           |
| 1          | Keyence VH-Z25 Standard Zoom Lens 25X-175X                               |
| 1          | CS-9 GSG Picoprobe Calibration Substrate (U9450.sq)                      |
| 1          | CS-11 GS-SG Picoprobe Calibration Substrate (U11450.sq)                  |

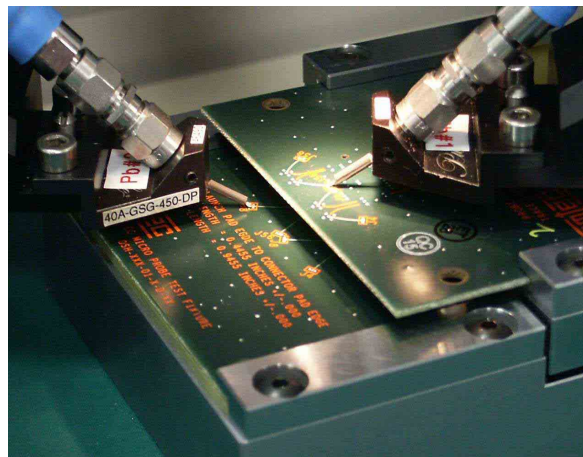**Figure 5 – 40 GHz High Performance Microwave Probes****Test Cables & Adapters**

| <u>QTY</u> | <u>Description</u>  |
|------------|---|
| 4          | Micro-Coax Cable Assembly 48" 3.5mm Male to 3.5mm Female, 26.5 GHz<br>(IL = .33 dB@ 10 GHz) |
| 2          | Huber-Suhner Cable Assembly 36" SMA Female to SMA Female 26.5 GHz<br>(IL = .34 dB @ 10 GHz) |
| 4          | Pasternack Precision Adapters, 3.5 mm Male to 2.9(K) Male,<br>Max.VSWR 1.25 @ 34GHz         |

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Appendix E - Frequency and Time Domain Measurements

It is important to note before gathering measurement data that TDA Systems IConnect measurements and CSA8000 measurements are virtually the same measurements with diverse formats. This means that the operator, being extremely aware, can obtain SI time and frequency characteristics in an almost simultaneous fashion.

Since IConnect setup procedures are specific to the frequency information sought, it is mandatory that the sample preparation and CSA8000 functional setups be consistent throughout the waveform gathering process. If the operators test equipment permits recall sequencing between the various test parameter setups, it insures IConnect functional setups remain consistent with the TDR/TDT waveforms previously recorded. Related time and frequency test parameter data recorded for this report were gathered simultaneously.

### Frequency (S-Parameter) Domain Procedures

Frequency data extraction involves two steps that first measure the frequency related time domain waveform followed by post-processing of the time domain waveforms into loss and crosstalk response parameters versus frequency. The first step utilizes the Tektronix CSA8000 time based instrument to capture frequency related single-ended or differential signal types propagating through an appropriately prepared SUT. The second step involves a correlation of the time based waveforms using the TDA Systems IConnect software tool to post-process these waveforms into frequency response parameters. TDA Systems labels these frequency related waveform relationships as the *Step* and *DUT* reference. This report establishes the setup procedures for defining the *Step* and *DUT* reference for frequency parameters of interest. Once established, the *Step* and *DUT* references are post-processed in IConnect's S-parameter computations window.

### CSA8000 Setup

Listed below are the CSA 8000 functional menu setups used for single-ended and differential frequency response extractions. Both signal types utilize I-Connect software tools to generate S-parameter upper and lower frequency boundaries along with the step frequency. These frequency boundaries are determined by a time domain instruments functional settings such as window length, number of points and averaging capability. Once window length, number of points and averaging functions are set, maintain the same instrument settings throughout the extraction process.

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

|                     | <u>Single-Ended Signal</u>            | <u>Differential Signal</u>            |
|---------------------|---------------------------------------|---------------------------------------|
| Vertical Scale:     | 100 mV/ Div:                          | 100 mV/ Div:                          |
| Offset:             | Default / Scroll                      | Default / Scroll                      |
| Horizontal Scale:   | 1nSec/ Div = 20 MHz step<br>frequency | 1nSec/ Div = 20 MHz step<br>frequency |
| Max. Record Length: | 4000 = Min. Resolution                | 4000 = Min. Resolution                |
| Averages:           | ≥ 128                                 | ≥ 128                                 |

### Insertion Loss

*SUT Preparation* – Use J8 or J4 signal paths to establish single ended waveforms and J10\_12 or J4\_6 signal paths to establish differential waveforms (*Figure 1*) Adjacent transmission paths are terminated 50Ω to GND single-ended or 100Ω differential.

*Step Reference* - Establish this waveform by making a TDT transmission measurement that includes all cables, adapters, and probes connected in the test systems transmission path. The transmission path is completed by inserting a negligible length of transmission standard (*Figure 5*) between the microwave probes.

*DUT Reference* - Establish this waveform by making an active TDT transmission measurement that includes all cables, adapters, and probes connected in the test systems transmission path. Manually insert the SUT between the probes in place of the transmission standard (*Figure 5*).

### Return Loss

*SUT Preparation* – Use J8 or J4 signal paths to establish single ended waveforms and J10\_12 or J4\_6 signal paths to establish differential waveforms (*Figure 1*) Adjacent transmission paths are terminated 50Ω to GND single-ended or 100Ω differential.

*Step Reference* - Establish the waveform by making an active TDR reflection measurement that includes all cables, adapters, and probes connected in the test systems electrical path to the open standard.

*DUT Reference* - Establish the waveform by making a TDT (matched) transmission measurement that includes all cables, adapters, and probes connected in the test systems transmission path (*Figure 5*). Cables and adapters located on the far-end of the inserted SUT providing a resistive load impedance that matches the test system input impedance condition. (i.e.; 50Ω single-ended or 100Ω differential)

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

### Near-End Crosstalk (NEXT)

*SUT Preparation* - Establish 50Ω to GND terminations at J4, J7, J8, J36, & J38 on the PCB (-02) terminal fixture. Establish 50Ω to GND terminations or 100Ω across signal paths at J4\_6, J9\_11, J10\_12, J72\_74, & J76\_78 on the PCB (-02) terminal fixture (*Figure 3*).

*Step Reference* - Establish this waveform by making an active measurement that includes all cables, adapters, and probes connected in the test systems electrical path to the open standard.

*DUT Reference* - Establish these waveforms by driving an active signal line (i.e.; J8) and recording the TDR coupled energy at the adjacent near-end (i.e.; J4). Maintain same procedures to establish the waveforms for worse case, best case, and across row (xrow) crosstalk conditions. These conditions are present for both single-ended and differential configurations.

### Far-End Crosstalk (FEXT)

*SUT Preparation* - Establish 50Ω to GND terminations at J4, J7, & J36 on the PCB (-01) socket fixture (*Figure 2*) and at J8 & J38 of the PCB (-02) terminal fixture (*Figure 3*). Differential paths are terminated 50Ω to GND or 100Ω across signal paths at J4\_6, J9\_11, & J72\_74 on the PCB (-01) socket fixture (*Figure 2*) and at J1012 & J76\_78 of the PCB (-02) terminal fixture (*Figure 3*).

*Step Reference* - Establish this waveform by making a TDT transmission measurement that includes all cables, adapters, and probes connected in the test systems transmission path. The transmission path is completed by inserting a negligible length of transmission standard (*Figure 5*) between the microwave probes.

*DUT Reference* - Establish these waveforms by driving an active signal line (i.e.; J8) and recording the TDR coupled energy at the adjacent near-end (i.e., J4). Maintain same procedures to establish the waveforms for worse case, best case, and across row (xrow) crosstalk conditions. These conditions are present for both single-ended and differential configurations.

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

### Time Domain Procedures

Measurements involving digital type pulses are performed utilizing either Time Domain Reflectometer (TDR) or Time Domain Transmission (TDT) methods. For this series of tests, TDR methods are employed for the impedance and propagation delay measurements. Crosstalk measurements utilize TDT methods. The Tektronix 80E04 TDR/ Sampling Head provide both the signaling type and sampling capability necessary to accurately and fully characterize the SUT.

### Impedance

The signal line(s) of the SUT's signal configuration is energized with a TDR pulse. The far-end of the energized signal line is terminated in the test systems characteristic impedance (e.g.; 50 $\Omega$  or 100 $\Omega$  terminations). By terminating the adjacent signal lines in the test systems characteristic impedance, the effects on the resultant impedance shape of the waveform is limited.

### Propagation Delay

This connector series uses the fastest edge rate (30ps) of the TDR impedance waveform to measure propagation delay. Single ended mated connector delay is determined by measuring the propagation time that occurs between the input mismatch response & the output mismatch response of the surface mount terminals of a mated connector. Propagation delay determinations are the results from a reflected waveform and therefore are halved to represent one-way travel propagation through the SUT. Differential mated connector delay is the measured difference of propagation between known signal trace length delays and the delay of the mated SUT. The measurement is a one-way propagation result. Termination of the adjacent signal lines into the test systems characteristic impedance eliminate alternate current paths providing for better measurement accuracy.

### Crosstalk

An active pulsed waveform is transmitted through a selected SUT signal line. The adjacent quiet signal lines are monitored for the coupled energy at the near-end and far-end. Active and quiet lines not being monitored are terminated in the test systems characteristic impedance. Signal lines adjacent to the quiet lines remain terminated on both ends throughout the test sequence. Failing to terminate the active near or far end, quiet lines, or in some cases, signal lines adjacent to the quiet line may have an effect on amplitude and shape of the coupled energy.

**Series:** QSE/QTE

**Description:** Parallel Board-to-Board, 0.8mm Pitch, 19mm (0.748") Stack Height

## Appendix F – Glossary of Terms

**BC** – Best Case crosstalk configuration

**DP** – Differential Pair signal configuration

**DUT** – Device under test; TDA IConnect reference waveform

**FEXT** – Far-End Crosstalk

**GSG** – Ground–Signal–Ground; geometric configuration

**NEXT** – Near-End Crosstalk

**PCB** – Printed Circuit Board

**SE** – Single-Ended

**SI** – Signal Integrity

**SUT** – System under test

**TDR** – Time Domain Reflectometry

**TDT** – Time Domain Transmission

**WC** – Worse Case crosstalk configuration

**Xrow<sup>se</sup>** – Cross ground/ power bar crosstalk, single-ended signal

**Xrow<sup>diff</sup>** – Cross ground/ power bar crosstalk, differential signal

**Z** – Impedance (expressed in ohms)