

UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DIMENSIONS ARE IN INCHES
 ONE PLACE DECIMALS ± .1 [2.54] THREE PLACE DECIMALS ± .005 [0.13] ANGLES ± 2°
 TWO PLACE DECIMALS ± .01 [0.25] FOUR PLACE DECIMALS ± .0020 [0.051]

TITLE: .050 [1.27] ϕ SOCKET MICRO STRIP

DWG NO: SMS-1XX-XX-XX-D
 SHEET 1 OF 1

SMS-1XX-XX-XX-D

BODY LENGTH SPECIFICATION
 -01 THRU -50 POSITIONS

CONTACT SPECIFICATION
 (SEE TABLE 1)
 USE SPECIFIED LEAD STYLE TO IDENTIFY CONTACT

BODY SPECIFICATION
 -D: DOUBLE ROW (USE SMS-50-D)



PLATING SPECIFICATION
 -G: GOLD (SPECIFY G IN CONTACT SUFFIX 'X')
 -T: TIN (SPECIFY T IN CONTACT SUFFIX 'X')
 -S: SELECTIVE (SPECIFY S IN CONTACT SUFFIX 'X')
 -F: FLASH SELECTIVE GOLD (SPECIFY F IN CONTACT SUFFIX 'X')
 (AVAILABLE IN -01 LEAD STYLE ONLY)
 -H: HEAVY GOLD (SPECIFY H IN CONTACT SUFFIX 'X')
 -TM: MATTE TIN (SPECIFY T IN CONTACT SUFFIX 'X')
 -SM: SELECTIVE GOLD, MATTE TIN TAIL (SPECIFY S IN CONTACT SUFFIX 'X')
 -FM: FLASH SELECTIVE GOLD, MATTE TIN TAIL (SPECIFY F IN CONTACT SUFFIX 'X')
 (AVAILABLE IN -01 LEAD STYLE ONLY)

TABLE 1

LEAD STYLE	CONTACT	'B'	PKG TUBE (SEE NOTE 5)	PLUG
01	C-16-1-XX	.100 [2.54]	PT-SMS001-D <input type="checkbox"/>	TP-03
02	C-16-2-XX	.190 [4.83]		

NOTES:

- MAX. BOWING AFTER ASSEMBLY: .006 [0.15] INCH/INCH
- MAX. FLASH: .005 [0.13]
- ϕ REPRESENTS A CRITICAL DIMENSION FOR STATISTICAL PROCESS CONTROL USE.
- PARTS CUT TO POSITION SHOULD BE SYMMETRICAL ABOUT ϕ . END WALLS OF CUT BODIES SHALL BE .012 [0.30] MIN. WHEN MEASURED AT CONTACT TAIL.
- PACKAGE ONLY POSITIONS 10 THROUGH 50 IN TUBES. BOX PACKAGE POSITIONS 01 THROUGH 09.
- CONTACT PUSHOUT FORCE: 1.5 LBS. MIN

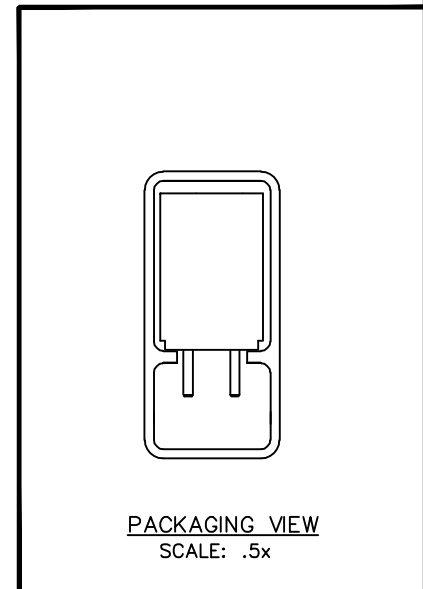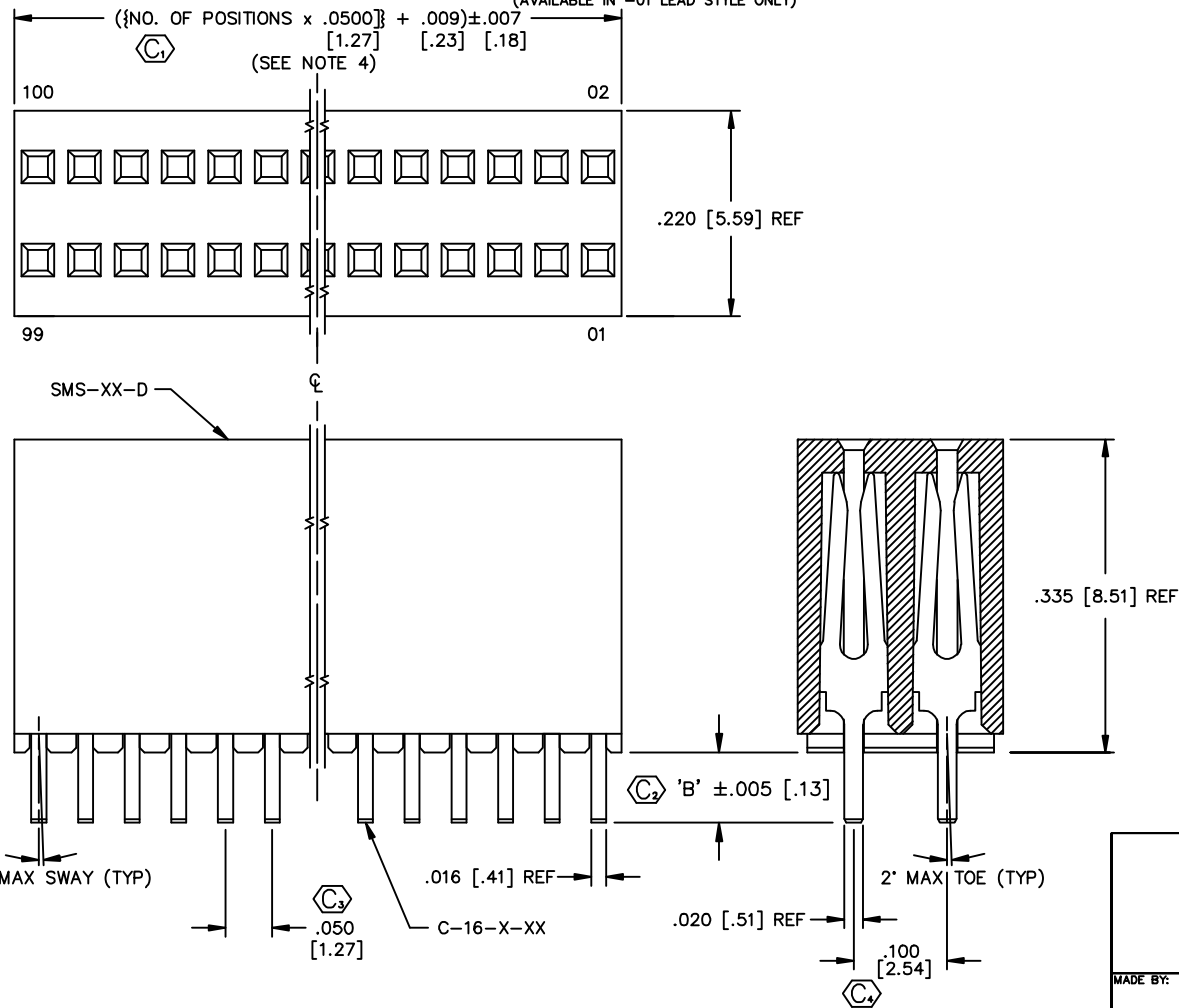

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR INCLUDED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

samtec

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
 PHONE (812) 944-6733 P.O. BOX 1147
 CODE 55322

MADE BY:

BRYANT 4-9-91

SMS-1XX-XX-XX-D
 SHEET 1 OF 1