




Project Number: Design Qualification Test Report	Tracking Code: 2876083_Report_Rev_1
Requested by: Jenny Chou	Date: 8/24/2021
Part #: 292-J-P-EP-ST-CM-X/RF086-92SP-505050-0304	
Part description: 292/RF086	Tech: Kason He
Test Start: 7/26/2021	Test Completed: 8/6/2021

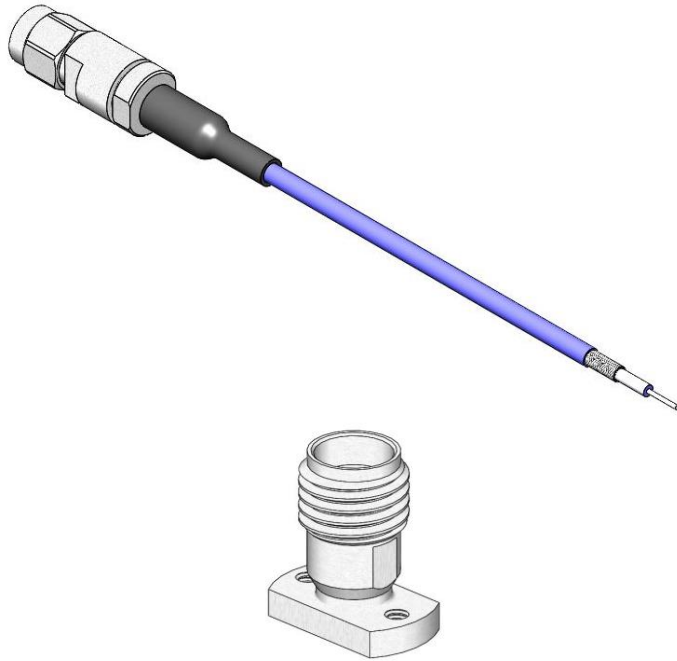

**DESIGN QUALIFICATION TEST REPORT**

**292/RF086**

**292-J-P-EP-ST-CM-X/RF086-92SP-505050-0304**

**REVISION HISTORY**

<b>DATA</b>	<b>REV.NUM.</b>	<b>DESCRIPTION</b>	<b>ENG</b>
8/24/2021	1	Initial Issue	KH

## CERTIFICATION

All instruments and measuring equipment were calibrated to National Institute for Standards and Technology (NIST) traceable standards according to ISO 10012-1 and ANSI/NCSL 2540-1, as applicable.

All contents contained herein are the property of Samtec. No portion of this report, in part or in full shall be reproduced without prior written approval of Samtec.

### SCOPE

To perform the following tests: Design Qualification test. Please see test plan.

### APPLICABLE DOCUMENTS

Standards: EIA Publication 364

### TEST SAMPLES AND PREPARATION

- 1) All materials were manufactured in accordance with the applicable product specification.
- 2) All test samples were identified and encoded to maintain traceability throughout the test sequences.
- 3) After soldering, the parts to be used for LLCR and DWV/IR testing were cleaned according to TLWI-0001.
- 4) Either an automated cleaning procedure or an ultrasonic cleaning procedure may be used.
- 5) The automated procedure is used with aqueous compatible soldering materials.
- 6) Parts not intended for testing LLCR and DWV/IR are visually inspected and cleaned if necessary.
- 7) Any additional preparation will be noted in the individual test sequences.
- 8) Solder Information: Lead free
- 9) Samtec Test PCBs used: PCB-110419-TST

## FLOWCHARTS

### Mating/Unmating/Durability

#### Group 1

292-J-P-EP-ST-CM-X  
RF086-92SP-505050-0304  
8 Assemblies

Step	Description
1.	<b>Contact Gaps</b> <i>Note: A. Measure and record initial gap, (distance) of closure between the fingers of the socket contact.</i> <i>B. Measure and record the interface dimension from the reference plane to the socket contact. Should not exceed .000" to -.003".</i>
2.	LLCR (1)
3.	<b>Cycles</b> Quantity = 100 <i>Note: Torque to 8 to 10 in/lbs.</i>
4.	<b>Visual Inspection</b> <i>Note: Inspect for any damage, shake out or blow out any debris. Do not use any chemicals.</i>
5.	<b>Cycles</b> Quantity = 100 <i>Note: Torque to 8 to 10 in/lbs.</i>
6.	<b>Visual Inspection</b> <i>Note: Inspect for any damage, shake out or blow out any debris. Do not use any chemicals.</i>
7.	<b>Cycles</b> Quantity = 100 <i>Note: Torque to 8 to 10 in/lbs.</i>
8.	<b>Visual Inspection</b> <i>Note: Inspect for any damage, shake out or blow out any debris. Do not use any chemicals.</i>
9.	<b>Cycles</b> Quantity = 100 <i>Note: Torque to 8 to 10 in/lbs.</i>
10.	<b>Visual Inspection</b> <i>Note: Inspect for any damage, shake out or blow out any debris. Do not use any chemicals.</i>
11.	<b>Cycles</b> Quantity = 100 <i>Note: Torque to 8 to 10 in/lbs.</i>
12.	<b>Visual Inspection</b> <i>Note: Inspect for any damage, shake out or blow out any debris. Do not use any chemicals.</i>
13.	<b>Contact Gaps</b> <i>Note: A. Measure and record initial gap, (distance) of closure between the fingers of the socket contact.</i> <i>B. Measure and record the interface dimension from the reference plane to the socket contact, should not exceed .000" to -.003".</i>
14.	LLCR (1) Max Delta = 15 mOhm
15.	Thermal Shock (2) - Non Standard
16.	LLCR (1) Max Delta = 15 mOhm

(1) LLCR = EIA-364-23  
 Open Circuit Voltage = 20 mV Max  
 Test Current = 100 mA Max

(2) Thermal Shock = Other  
 Exposure Time at Temperature Extremes = 1/2 Hour  
 Method A, Test Condition = 1 (-55°C to +125°C)  
 Test Duration = A-3 (10 Cycles)

**FLOWCHARTS Continued****IR/DWV****Pin-to-Closest Metallic Hardware**Group 1

292-J-P-EP-ST-CM-X  
RF086-92SP-505050-0304  
2 Assemblies

Group 2

292-J-P-EP-ST-CM-X  
2 Assemblies

Group 3

RF086-92SP-505050-0304  
2 Assemblies

Group 4

292-J-P-EP-ST-CM-X  
RF086-92SP-505050-0304  
2 Assemblies

Step	Description	Step	Description	Step	Description	Step	Description
1.	DWV Breakdown <sup>(2)</sup>	1.	DWV Breakdown <sup>(2)</sup>	1.	DWV Breakdown <sup>(2)</sup>	1.	IR <sup>(3)</sup>
						2.	DWV at Test Voltage <sup>(1)</sup>
						3.	Thermal Shock <sup>(4)</sup>
						4.	IR <sup>(3)</sup>
						5.	DWV at Test Voltage <sup>(1)</sup>

- (1) DWV at Test Voltage = EIA-364-20  
Test Condition = 1 (Sea Level)  
DWV test voltage is equal to 75% of the lowest breakdown voltage  
Test voltage applied for 60 seconds
- (2) DWV Breakdown = EIA-364-20  
Test Condition = 1 (Sea Level)  
DWV test voltage is equal to 75% of the lowest breakdown voltage  
Test voltage applied for 60 seconds
- (3) IR = EIA-364-21  
Test Condition = 500 Vdc, 2 Minutes Max
- (4) Thermal Shock = EIA-364-32  
Exposure Time at Temperature Extremes = 1/2 Hour  
Method A, Test Condition = I (-55°C to +85°C)  
Test Duration = A-3 (100 Cycles)

**Contact Captivation**Group 1

292-J-P-EP-ST-CM-X

10 Assemblies

Step	Description
1.	Contact Captivation <i>Note: This is a destructive test.</i>
	<i>Apply force to the center socket contact until captivation failure, (push contact from flange side), record force</i>

## ATTRIBUTE DEFINITIONS

The following is a brief, simplified description of attributes.

### THERMAL SHOCK:

- 1) EIA-364-32, *Thermal Shock (Temperature Cycling) Test Procedure for Electrical Connectors*.
- 2) Test Condition I: -55°C to +85°C
- 3) Test Time: ½ hour dwell at each temperature extreme
- 4) Number of Cycles: 100
- 5) All test samples are pre-conditioned at ambient.
- 6) All test samples are exposed to environmental stressing in the mated condition.

### THERMAL SHOCK:

- 1) EIA-364-32, *Thermal Shock (Temperature Cycling) Test Procedure for Electrical Connectors*.
- 2) Test Condition I: -55°C to +125°C
- 3) Test Time: ½ hour dwell at each temperature extreme
- 4) Number of Cycles: 10
- 5) All test samples are pre-conditioned at ambient.
- 6) All test samples are exposed to environmental stressing in the mated condition.

### MATING/UNMATING:

- 1) Reference document: EIA-364-13, *Mating and Unmating Forces Test Procedure for Electrical Connectors*.
- 2) The full insertion position was to within 0.003” to 0.004” of the plug bottoming out in the receptacle to prevent damage to the system under test.
- 3) One of the mating parts is secured to a floating X-Y table to prevent damage during cycling.

### LLCR:

- 1) EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 2) A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 3) The following guidelines are used to categorize the changes in LLCR as a result from stressing
  - a.  $\leq +5.0$  mOhms: -----Stable
  - b. +5.1 to +10.0 mOhms:-----Minor
  - c. +10.1 to +15.0 mOhms: -----Acceptable
  - d. +15.1 to +50.0 mOhms: -----Marginal
  - e. +50.1 to +1000 mOhms: -----Unstable
  - f.  $>+1000$  mOhms:-----Open Failure

### CONTACT CAPTIVATION:

- 1) Apply force to the center socket contact until captivation failure, (push contact from flange side) record force.

**ATTRIBUTE DEFINITIONS Continued**

The following is a brief, simplified description of attributes.

**INSULATION RESISTANCE (IR):**

To determine the resistance of insulation materials to leakage of current through or on the surface of these materials when a DC potential is applied.

- 1) PROCEDURE:
  - a. Reference document: EIA-364-21, *Insulation Resistance Test Procedure for Electrical Connectors*.
  - b. Test Conditions:
    - i. Between Adjacent Contacts or Signal-to-Ground
    - ii. Electrification Time 2.0 minutes
    - iii. Test Voltage (500 VDC) corresponds to calibration settings for measuring resistances.
- 2) MEASUREMENTS:
- 3) When the specified test voltage is applied (VDC), the insulation resistance shall not be less than 5000 megohms.

**DIELECTRIC WITHSTANDING VOLTAGE (DWV):**

To determine if the sockets can operate at its rated voltage and withstand momentary over potentials due to switching, surges, and other similar phenomenon. Separate samples are used to evaluate the effect of environmental stresses so not to influence the readings from arcing that occurs during the measurement process.

- 1) PROCEDURE:
  - a. Reference document: EIA-364-20, *Withstanding Voltage Test Procedure for Electrical Connectors*.
  - b. Test Conditions:
    - i. Between Adjacent Contacts or Signal-to-Ground
    - ii. Barometric Test Condition 1
    - iii. Rate of Application 500 V/Sec
    - iv. Test Voltage (VAC) until breakdown occurs
- 2) MEASUREMENTS/CALCULATIONS
  - a. The breakdown voltage shall be measured and recorded.
  - b. The dielectric withstanding voltage shall be recorded as 75% of the minimum breakdown voltage.
  - c. The working voltage shall be recorded as one-third (1/3) of the dielectric withstanding voltage (one-fourth of the breakdown voltage).

## RESULTS

### Contact Captivation:

- Min -----42.10 Lbs
- Max-----45.48 Lbs

### Insulation Resistance minimums, IR

#### Pin to Ground

- Initial
  - Mated -----45000 Meg  $\Omega$  ----- Passed
  - Unmated -----45000 Meg  $\Omega$  ----- Passed
- Thermal Shock
  - Mated -----45000 Meg  $\Omega$  ----- Passed
  - Unmated -----45000Meg  $\Omega$  ----- Passed

### Dielectric Withstanding Voltage minimums, DWV

- Minimums
  - Breakdown Voltage ----- 1165 VAC
  - Test Voltage -----875 VAC
  - Working Voltage -----290 VAC

#### Pin to Ground

- Initial DWV -----Passed
- Thermal DWV-----Passed

**RESULTS Continued****LLCR Mating/Unmating Durability Group (8 signal and 8 ground LLCR test points)****Signal pin**

- **Initial** ----- 23.48 mOhms Max
- **Durability, 500 Cycles**
  - **<= +5.0 mOhms**-----8 Points ----- Stable
  - **+5.1 to +10.0 mOhms** -----0 Points ----- Minor
  - **+10.1 to +15.0 mOhms** -----0 Points ----- Acceptable
  - **+15.1 to +50.0 mOhms** -----0 Points ----- Marginal
  - **+50.1 to +1000 mOhms**-----0 Points ----- Unstable
  - **>+1000 mOhms**-----0 Points ----- Open Failure
- **Thermal Shock**
  - **<= +5.0 mOhms**-----7 Points ----- Stable
  - **+5.1 to +10.0 mOhms** -----1 Points ----- Minor
  - **+10.1 to +15.0 mOhms** -----0 Points ----- Acceptable
  - **+15.1 to +50.0 mOhms** -----0 Points ----- Marginal
  - **+50.1 to +1000 mOhms**-----0 Points ----- Unstable
  - **>+1000 mOhms**-----0 Points ----- Open Failure

**Ground pin**

- **Initial** ----- 11.03 mOhms Max
- **Durability, 500 Cycles**
  - **<= +5.0 mOhms**-----8 Points ----- Stable
  - **+5.1 to +10.0 mOhms** -----0 Points ----- Minor
  - **+10.1 to +15.0 mOhms** -----0 Points ----- Acceptable
  - **+15.1 to +50.0 mOhms** -----0 Points ----- Marginal
  - **+50.1 to +1000 mOhms**-----0 Points ----- Unstable
  - **>+1000 mOhms**-----0 Points ----- Open Failure
- **Thermal Shock**
  - **<= +5.0 mOhms**-----8 Points ----- Stable
  - **+5.1 to +10.0 mOhms** -----0 Points ----- Minor
  - **+10.1 to +15.0 mOhms** -----0 Points ----- Acceptable
  - **+15.1 to +50.0 mOhms** -----0 Points ----- Marginal
  - **+50.1 to +1000 mOhms**-----0 Points ----- Unstable
  - **>+1000 mOhms**-----0 Points ----- Open Failure

**DATA SUMMARIES****INSULATION RESISTANCE (IR):**

	Pin to Ground		
	Mated	Unmated	Unmated
Minimum	<b>292-J/RF086</b>	<b>292-J</b>	<b>RF086</b>
<b>Initial</b>	45000	45000	45000
<b>Thermal</b>	45000	45000	45000

**DIELECTRIC WITHSTANDING VOLTAGE (DWV):**

Voltage Rating Summary	
Minimum	<b>292-J/RF086</b>
<b>Break Down Voltage</b>	1165
<b>Test Voltage</b>	875
<b>Working Voltage</b>	290

Pin to Ground	
<b>Initial Test Voltage</b>	Passed
<b>After Thermal Test Voltage</b>	Passed

**CONTACT CAPTIVATION:**

	Force (lbs)
Minimum	<b>42.10</b>
Maximum	45.48
Average	44.15

**DATA SUMMARIES Continued****LLCR Mating/Unmating Durability Group**

- 1). A total of 8 signal and 8 ground points were measured.
- 2). EIA-364-23, *Low Level Contact Resistance Test Procedure for Electrical Connectors and Sockets*.
- 3). A computer program, *LLCR 221.exe*, ensures repeatability for data acquisition.
- 4). The following guidelines are used to categorize the changes in LLCR as a result from stressing.
  - a.  $\leq +5.0$  mOhms:-----Stable
  - b.  $+5.1$  to  $+10.0$  mOhms:-----Minor
  - c.  $+10.1$  to  $+15.0$  mOhms:-----Acceptable
  - d.  $+15.1$  to  $+50.0$  mOhms:-----Marginal
  - e.  $+50.1$  to  $+1000$  mOhms:-----Unstable
  - f.  $>+1000$  mOhms:-----Open Failure

<b>LLCR Measurement Summaries by Pin Type</b>				
Date	2021/7/26	2021/8/3	2021/8/6	
Room Temp (Deg C)	22	22	22	
Rel Humidity (%)	52	50	52	
Technician	Kason He	Kason He	Kason He	
mOhm values	Actual Initial	Delta 500 Cycles	Delta Therm Shck	Delta
<b>Pin Type 1: Signal</b>				
Average	23.41	0.46	0.80	
St. Dev.	0.05	1.00	2.02	
Min	23.33	0.04	0.00	
Max	23.48	3.09	6.15	
Summary Count	8	8	8	
Total Count	8	8	8	
<b>Pin Type 2: Ground</b>				
Average	10.39	0.89	1.26	
St. Dev.	0.36	0.51	0.65	
Min	9.91	0.09	0.11	
Max	11.03	1.60	2.30	
Summary Count	8	8	8	
Total Count	8	8	8	

<b>LLCR Delta Count by Category</b>						
mOhms	Stable	Minor	Acceptable	Marginal	Unstable	Open
	$\leq 5$	$>5$ & $\leq 10$	$>10$ & $\leq 15$	$>15$ & $\leq 50$	$>50$ & $\leq 1000$	$>1000$
<b>500 Cycles</b>	16	0	0	0	0	0
<b>Therm Shck</b>	15	1	0	0	0	0

**EQUIPMENT AND CALIBRATION SCHEDULES****Equipment #:** HZ-TSC-01**Description:** Vertical Thermal Shock Chamber**Manufacturer:** Cincinnatti Sub Zero**Model:** VTS-3-6-6-SC/AC**Serial #:** 10-VT14994**Accuracy:** See Manual

... Last Cal: 04/15/2021, Next Cal: 04/14/2022

**Equipment #:** DG-HPT-01**Description:** Hipot Safety Tester**Manufacturer:** Vitrek**Model:** V73**Serial #:** 025866**Accuracy:**

... Last Cal: 04/15/2021, Next Cal: 04/14/2022

**Equipment #:** HZ-MO-05**Description:** Micro-ohmmeter**Manufacturer:** Keithley**Model:** 3706**Serial #:** 1285188**Accuracy:** Last Cal: 1/2/2021, Next Cal: 1/1/2022